

ZWS75BAF

EVALUATION DATA

型式データ

INDEX

1. 測定方法	Evaluation method	PAGE	
1.1	測定回路	Circuit used for determination	
	測定回路1	Circuit 1 used for determination	T-1
	静特性	Steady state data	
	過電流保護特性	Over current protection (OCP) characteristics	
	過電圧保護特性	Over voltage protection (OVP) characteristics	
	出力立ち上がり特性	Output rise characteristics	
	出力立ち下がり特性	Output fall characteristics	
	出力保持時間特性	Hold up time characteristics	
	測定回路2	Circuit 2 used for determination	T-1
	過渡応答（負荷急変）特性	Dynamic load response characteristics	
	測定回路3	Circuit 3 used for determination	T-2
	入力サージ電流（突入電流）波形	Inrush current waveform	
	測定回路4	Circuit 4 used for determination	T-2
	リーク電流特性	Leakage current characteristics	
	測定回路5	Circuit 5 used for determination	T-2
	出力リップル、ノイズ波形	Output ripple and noise waveform	
	測定構成	Configuration used for determination	T-3
	EMI特性	Electromagnetic interference characteristics	
	(a) 雑音端子電圧（帰還ノイズ）	Conducted emission	
	(b) 雑音電界強度（放射ノイズ）	Radiated emission	
1.2	使用測定機器	List of equipment used	T-4

2. 特性データ Characteristics

2.1	静特性	Steady state data	
(1)	入力・負荷・温度変動／出力起動・遮断電圧	Regulation - line and load, Temperature drift	
		/ Start up voltage and Drop out voltage	T-5
(2)	効率対出力電流	Efficiency vs. Output current	T-6
(3)	入力電流対出力電流	Input current vs. Output current	T-7
(4)	入力電力・力率対出力電流	Input power and Power factor vs. Output current	T-8
2.2	過電流保護特性	Over current protection (OCP) characteristics	T-9
2.3	過電圧保護特性	Over voltage protection (OVP) characteristics	T-9
2.4	出力立ち上がり特性	Output rise characteristics	T-10
2.5	出力立ち下がり特性	Output fall characteristics	T-11
2.6	出力保持時間特性	Hold up time characteristics	T-12
2.7	過渡応答（負荷急変）特性	Dynamic load response characteristics	T-13
2.8	入力電圧瞬停特性	Response to brown out characteristics	T-14～15
2.9	入力サージ電流（突入電流）波形	Inrush current waveform	T-16
2.10	高調波成分	Input current harmonics	T-17
2.11	入力電流波形	Input current waveform	T-17
2.12	リーク電流特性	Leakage current characteristics	T-18
2.13	出力リップル、ノイズ波形	Output ripple and noise waveform	T-19
2.14	E M I 特性	Electromagnetic interference characteristics	T-20～23

使用記号 Terminology used


	定義	Definition
V _{in} 入力電圧	Input voltage
V _{out} 出力電圧	Output voltage
I _{in} 入力電流	Input current
I _{out} 出力電流	Output current
W _{in} 入力電力	Input power
T _a 周囲温度	Ambient temperature
f 周波数	Frequency

1. 測定方法 Evaluation method

1.1 測定回路 Circuit used for determination


測定回路1 Circuit 1 used for determination

- 静特性 Steady state data
- 過電流保護特性 Over current protection (OCP) characteristics
- 過電圧保護特性 Over voltage protection (OVP) characteristics
- 出力立ち上がり特性 Output rise characteristics
- 出力立ち下がり特性 Output fall characteristics
- 出力保持時間特性 Hold up time characteristics

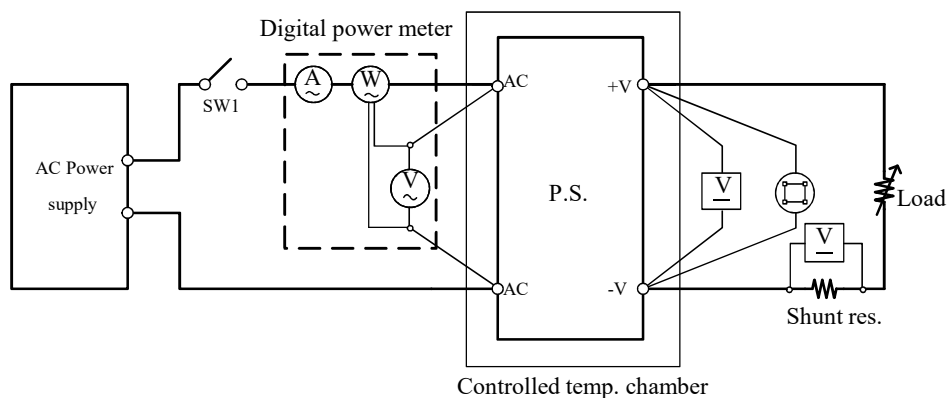


測定回路2 Circuit 2 used for determination

- 過渡応答 (負荷急変) 特性 Dynamic load response characteristics

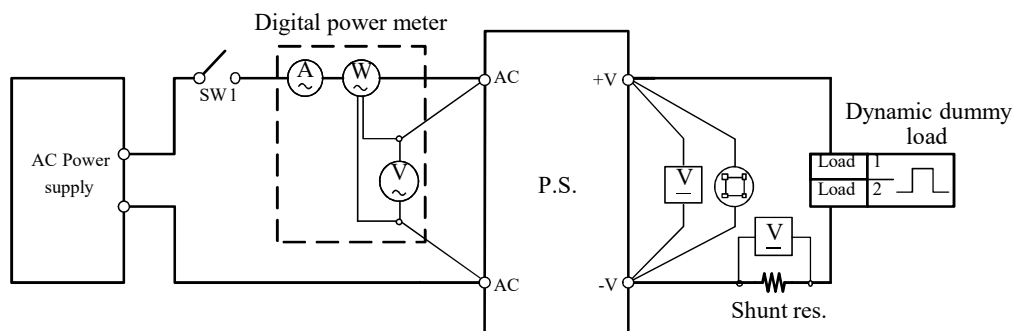


Output current waveform

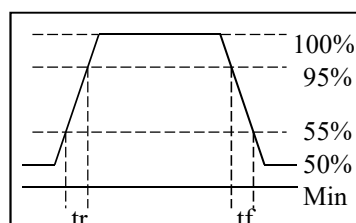


測定回路3 Circuit 3 used for determination

・入力サージ電流 (突入電流) 波形 Inrush current waveform

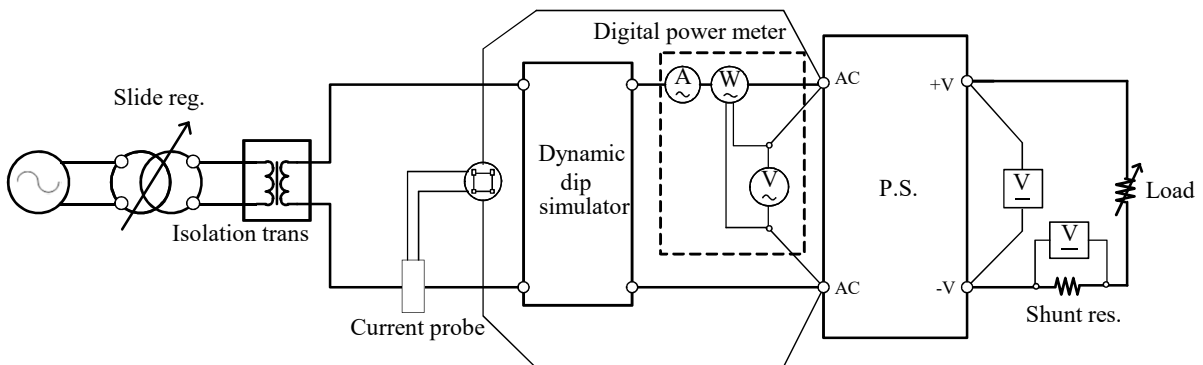


測定回路4 Circuit 4 used for determination

・リーク電流特性 Leakage current characteristics

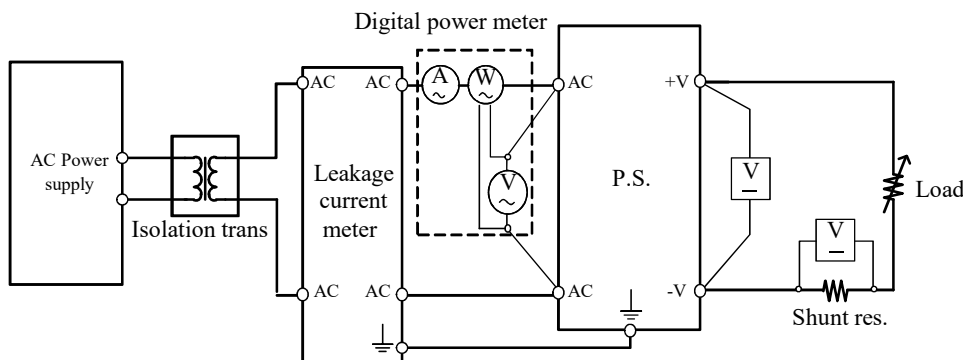

測定回路5 Circuit 5 used for determination

・出力リップル、ノイズ波形 Output ripple and noise waveform

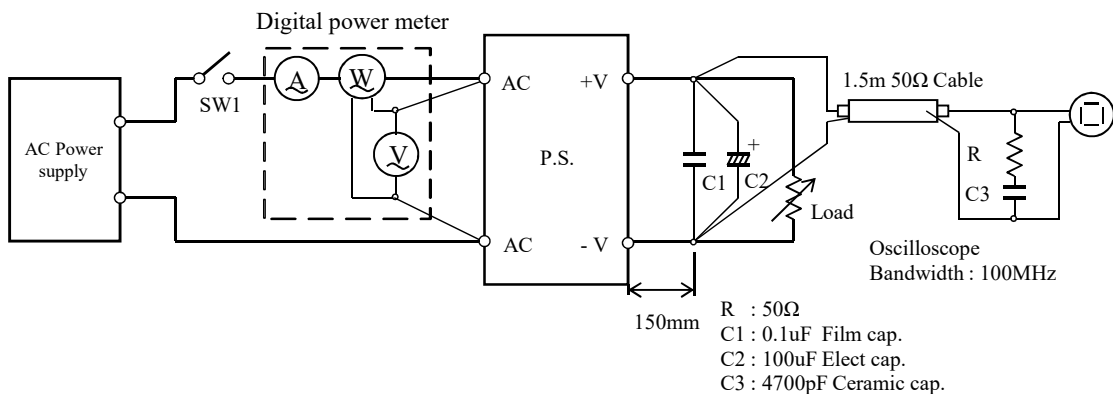


測定構成 Configuration used for determination

•EMI特性 Electromagnetic interference characteristics


(a) 雑音端子電圧 (帰還ノイズ)

Conducted emission

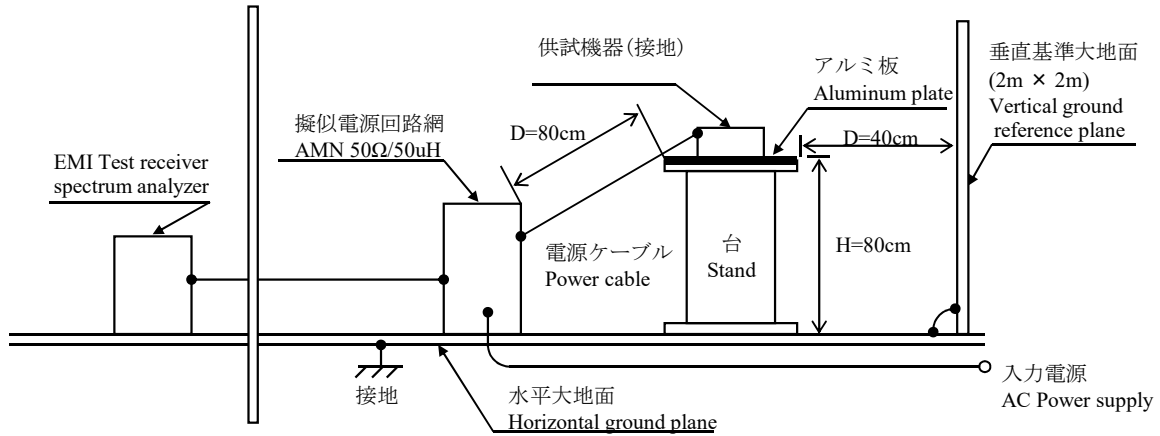

(b) 雑音電界強度 (放射ノイズ)

Radiated emission

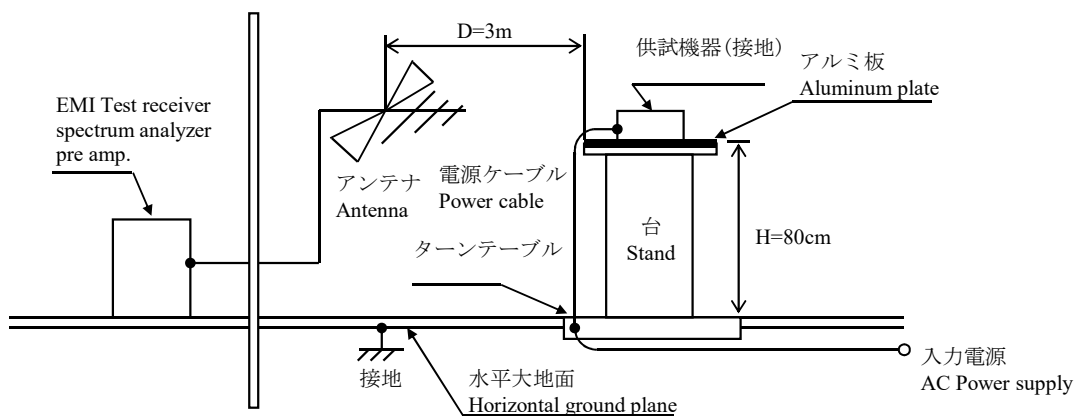

1.2 使用測定機器 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	TEKTRONIX	TDS220
2	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA ELECT.	DL1740
3	DIGITAL MULTIMETER	AGILENT	34970A
4	DIGITAL POWER METER	YOKOGAWA ELECT.	WT210
5	CURRENT PROBE	YOKOGAWA ELECT.	701930 / 701932
6	CURRENT PROBE / AMP.	TEKTRONIX	A6303 / AM503
7	DYNAMIC DUMMY LOAD	TAKASAGO	FK-200L
8	DUMMY LOAD	PCN	RHF250 SIRIES
9	SLIDE REGULATOR	MATSUNAGA	S3-24100
10	ISOLATION TRANS	MATSUNAGA	3WTC-50K
11	CVCF	TAKASAGO	AA2000XG
12	CVCF	NF	ES10000S
13	LEAKAGE CURRENT METER	HIOKI	3156
14	DYNAMIC DIP SIMULATOR	TAKAMISAWA	PSA-210
15	CONTROLLED TEMP. CHAMBER	ESPEC	SU-641
16	EMI TEST RECEIVER / SPECTRUM ANALYZER	ROHDE & SCHWARZ	ESCI
17	PRE AMP.	SONOMA	310N
18	AMN	SCHWARZBECK	NNLK8121
19	ANTENNA	SCHWARZBECK	CBL6111D
20	HARMONIC / FLICKER ANALYZER	KIKUSUI	KHA1000
21	SINGLE-PHASE MASTER	NF	4420
22	REFERENCE IMPEDANCE NETWORK 20A	NF	4150
23	MULTI OUTLET UNIT	KIKUSUI	OT01-KHA

2. 特性データ

Characteristics

ZWS75BAF

2.1 静特性 Steady state data

(1) 入力・負荷・温度変動／出力起動・遮断電圧

Regulation - line and load, Temperature drift / Start up voltage and Drop out voltage

5V

1. Regulation - line and load

Condition Ta : 25 °C

Iout \ Vin	85VAC	100VAC	200VAC	265VAC	Line regulation	
0%	5.005V	5.005V	5.006V	5.006V	1mV	0.020%
50%	5.004V	5.004V	5.004V	5.005V	1mV	0.020%
100%	5.003V	5.003V	5.004V	5.004V	1mV	0.020%
Load regulation	2mV	2mV	2mV	2mV		
	0.040%	0.040%	0.040%	0.040%		

2. Temperature drift

Conditions Vin : 100 VAC

Iout : 100 %

Ta	-10°C	+25°C	+50°C	Temperature stability	
Vout	5.009V	5.003V	4.998V	11mV	0.220%

3. Start up voltage and Drop out voltage

Conditions Ta : 25 °C

Iout : 100 %

Start up voltage (Vin)	74VAC
Drop out voltage (Vin)	61VAC

12V

1. Regulation - line and load

Condition Ta : 25 °C

Iout \ Vin	85VAC	100VAC	200VAC	265VAC	Line regulation	
0%	12.007V	12.007V	12.008V	12.008V	1mV	0.008%
50%	12.005V	12.005V	12.006V	12.006V	1mV	0.008%
100%	12.004V	12.004V	12.005V	12.005V	1mV	0.008%
Load regulation	3mV	3mV	3mV	3mV		
	0.025%	0.025%	0.025%	0.025%		

2. Temperature drift

Conditions Vin : 100 VAC

Iout : 100 %

Ta	-10°C	+25°C	+50°C	Temperature stability	
Vout	12.025V	12.004V	11.992V	33mV	0.275%

3. Start up voltage and Drop out voltage

Conditions Ta : 25 °C

Iout : 100 %

Start up voltage (Vin)	74VAC
Drop out voltage (Vin)	57VAC

24V

1. Regulation - line and load

Condition Ta : 25 °C

Iout \ Vin	85VAC	100VAC	200VAC	265VAC	Line regulation	
0%	24.010V	24.010V	24.012V	24.013V	3mV	0.013%
50%	24.013V	24.011V	24.013V	24.014V	3mV	0.013%
100%	24.014V	24.011V	24.013V	24.014V	3mV	0.013%
Load regulation	4mV	1mV	1mV	1mV		
	0.017%	0.004%	0.004%	0.004%		

2. Temperature drift

Conditions Vin : 100 VAC

Iout : 100 %

Ta	-10°C	+25°C	+50°C	Temperature stability	
Vout	24.043V	24.011V	23.992V	51mV	0.212%

3. Start up voltage and Drop out voltage

Conditions Ta : 25 °C

Iout : 100 %


Start up voltage (Vin)	74VAC
Drop out voltage (Vin)	58VAC

(2) 効率対出力電流


Efficiency vs. Output current

Conditions Vin : 85 VAC -----
 : 100 VAC -.-.-.
 : 200 VAC ———
 : 265 VAC - - - -
 Ta : 25 °C


5V

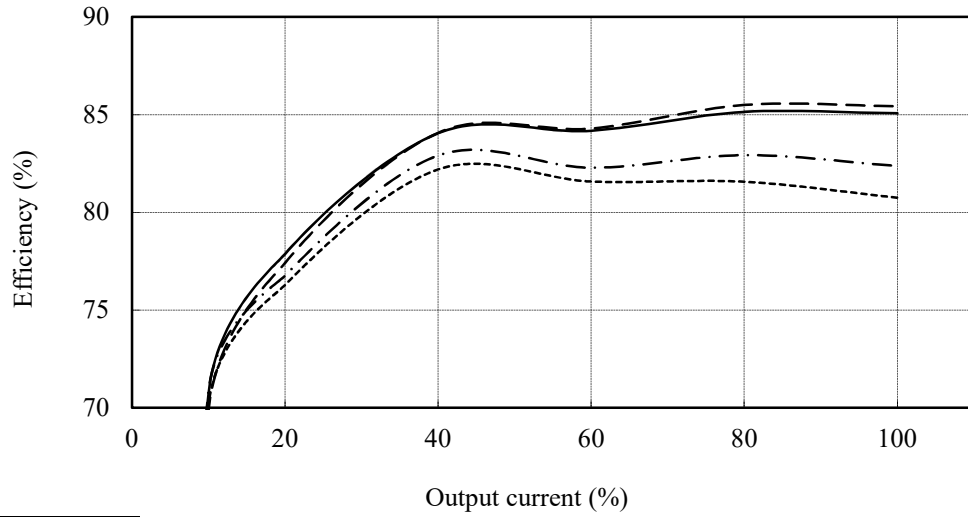

12V

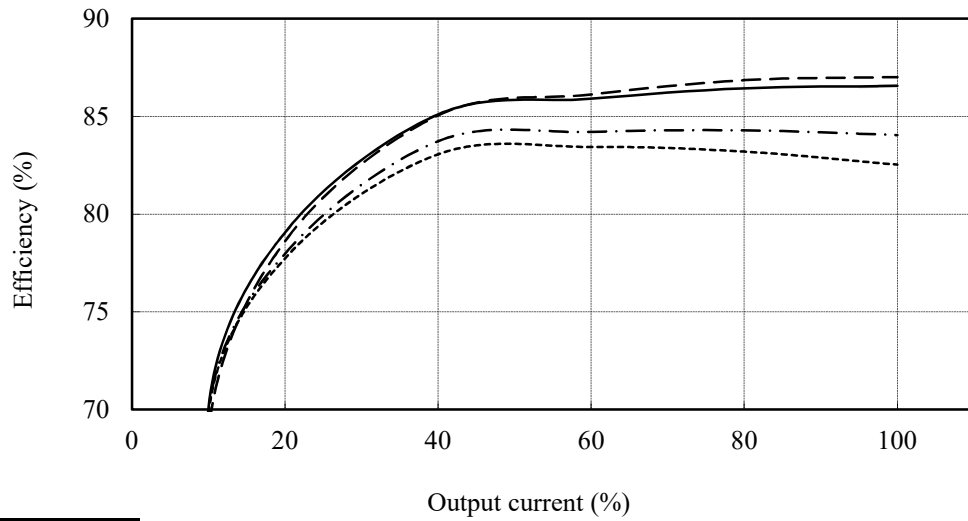

24V

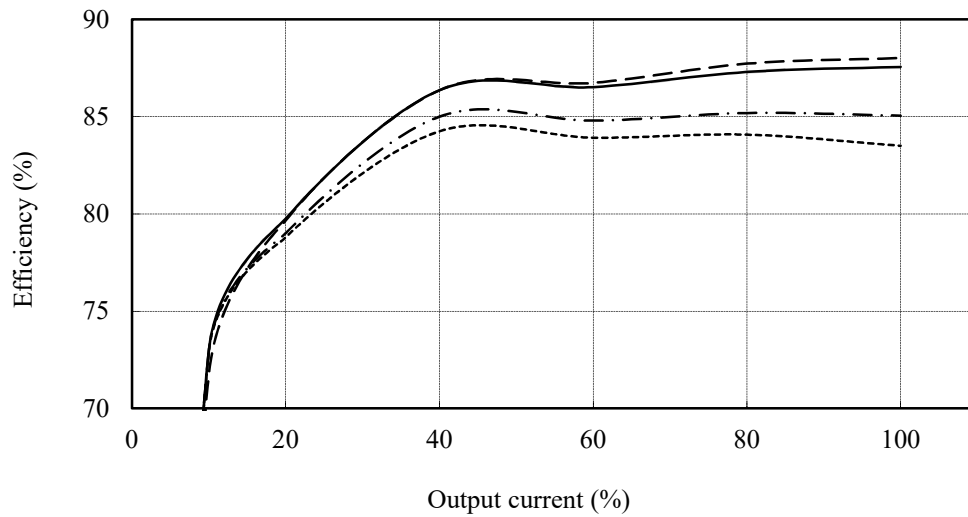


(3) 入力電流対出力電流
Input current vs. Output current

Conditions Vin : 85 VAC -----
 : 100 VAC -.-.-
 : 200 VAC ———
 : 265 VAC - - - -
 Ta : 25 °C


5V

Vin	Input current
	Iout : 0%
85VAC	0.02A
100VAC	0.02A
200VAC	0.03A
265VAC	0.04A

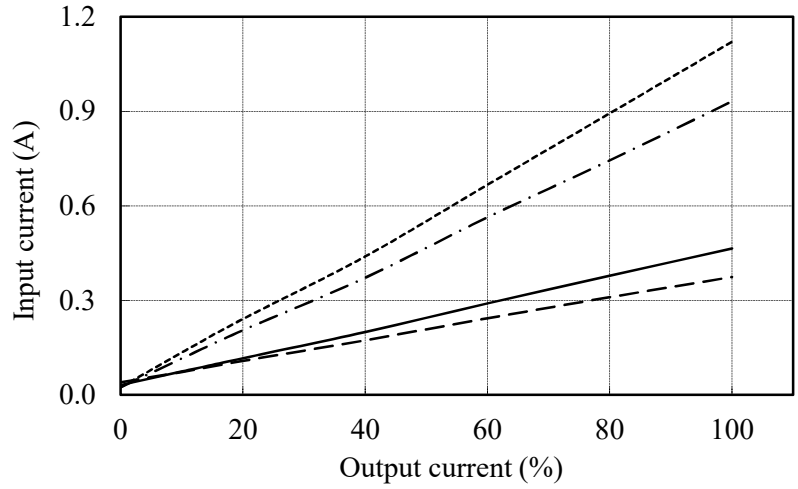


12V

Vin	Input current
	Iout : 0%
85VAC	0.02A
100VAC	0.02A
200VAC	0.03A
265VAC	0.04A

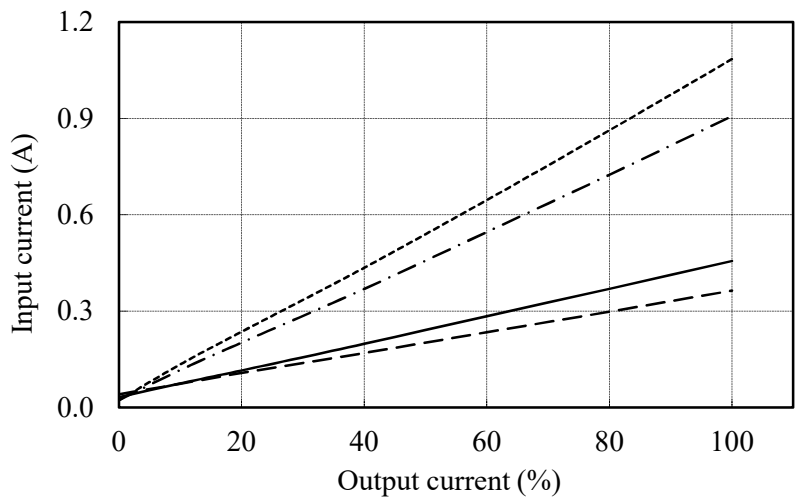

24V

Vin	Input current
	Iout : 0%
85VAC	0.02A
100VAC	0.02A
200VAC	0.03A
265VAC	0.04A

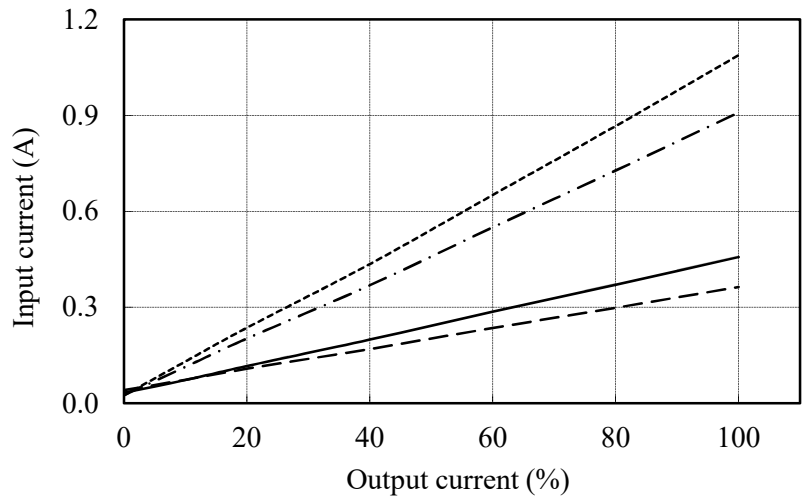


(4) 入力電力・力率対出力電流

Input power and Power factor vs. Output current

Conditions Vin : 85 VAC -----
 : 100 VAC - - - - -
 : 200 VAC ————
 : 265 VAC - - - - -
 Ta : 25 °C


5V

Vin	Input power
	Iout : 0%
85VAC	1.2W
100VAC	1.2W
200VAC	1.6W
265VAC	2.1W

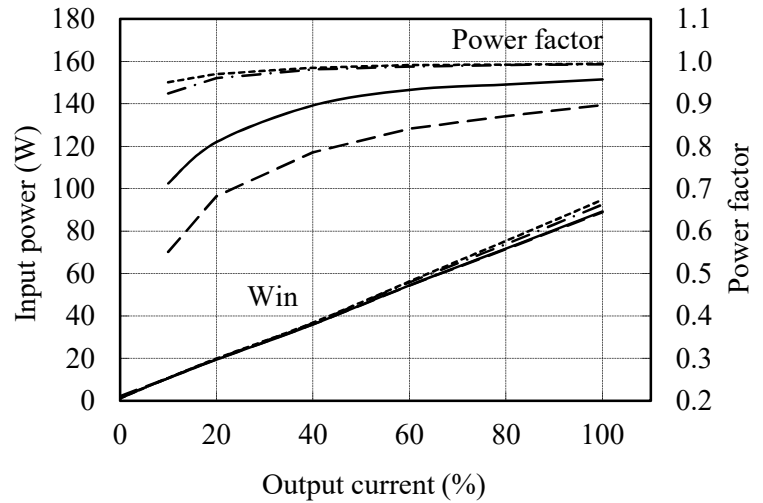


12V

Vin	Input power
	Iout : 0%
85VAC	1.3W
100VAC	1.3W
200VAC	1.6W
265VAC	2.3W

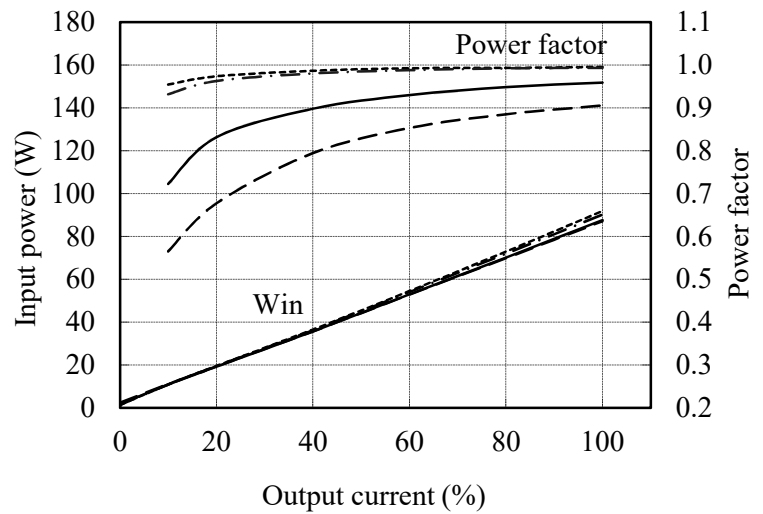

24V

Vin	Input power
	Iout : 0%
85VAC	1.5W
100VAC	1.5W
200VAC	1.7W
265VAC	2.4W

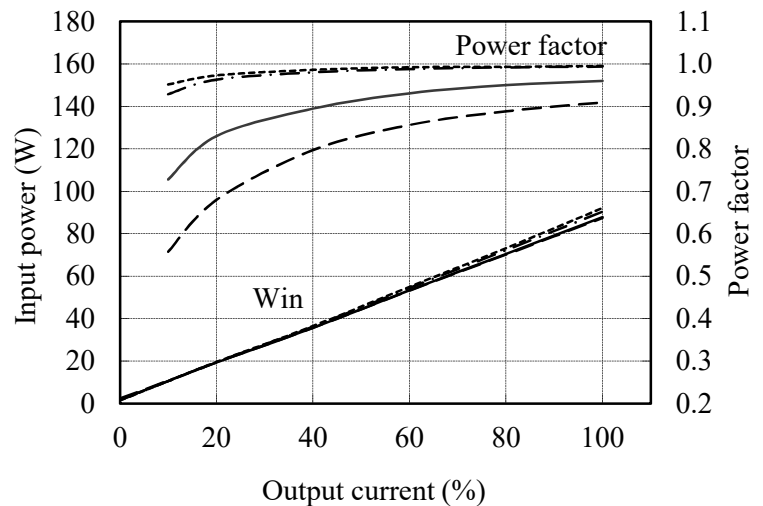

2.2 過電流保護特性

Over current protection (OCP) characteristics

2.3 過電圧保護特性

Over voltage protection (OVP) characteristics

Conditions V_{in} : 100 VAC

T_a : -10 °C

25 °C

50 °C

- · - · -



—————

Conditions V_{in} : 100 VAC



I_{out} : 0 %

T_a : 25 °C



5V

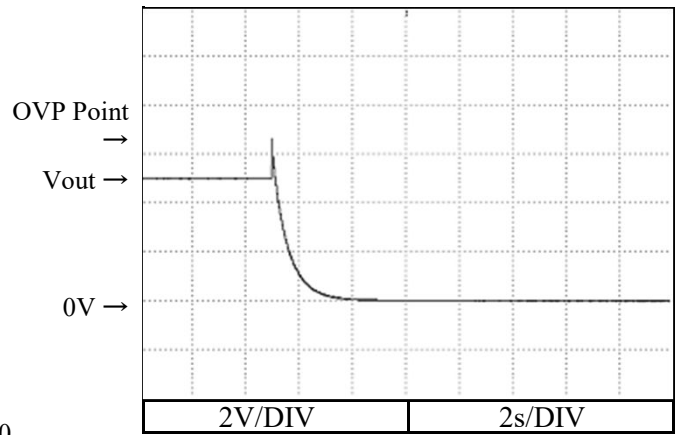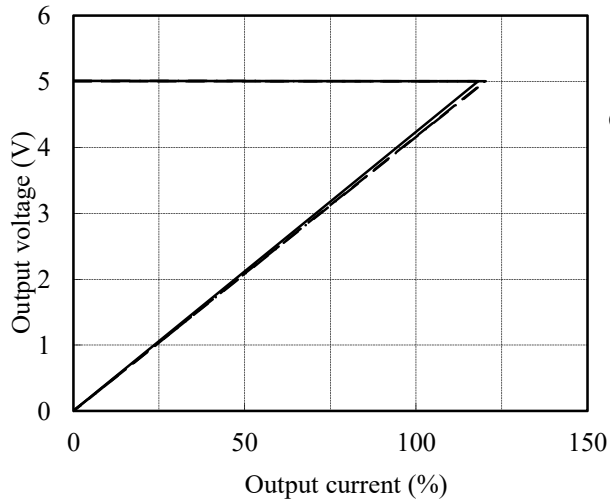

12V

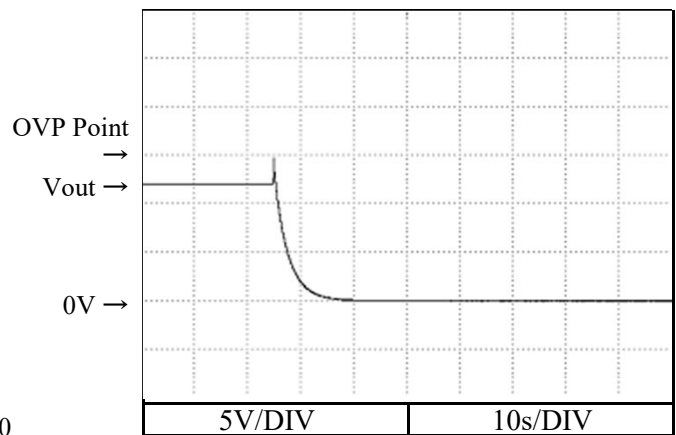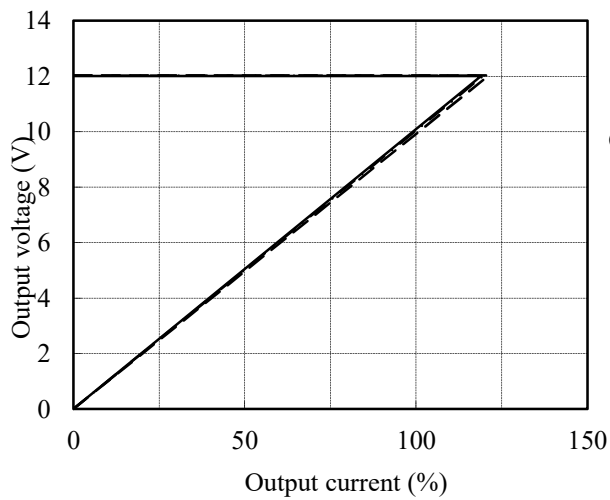




24V

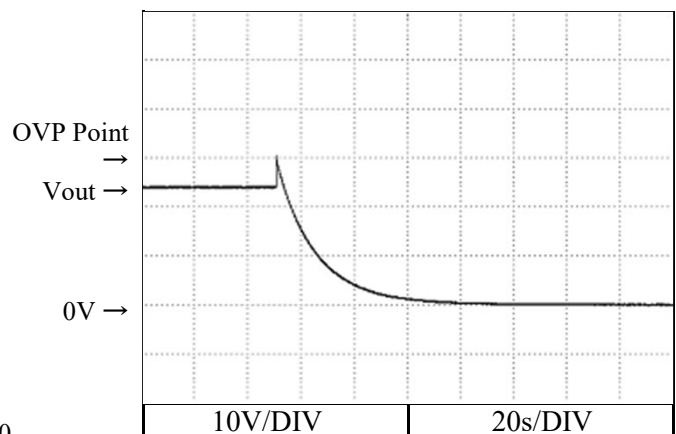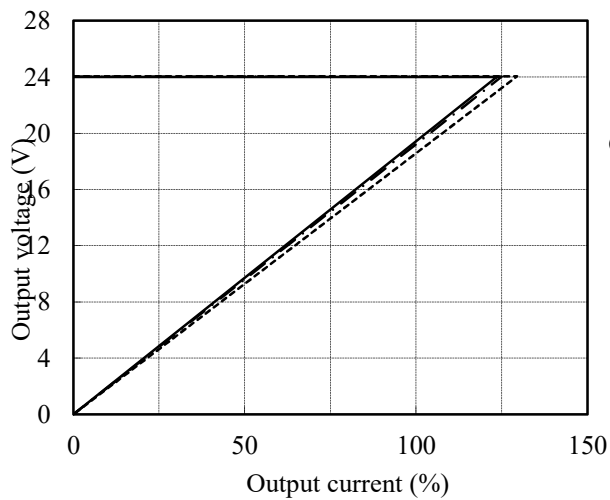

2.4 出力立ち上がり特性

Output rise characteristics




Conditions Vin : 85 VAC (A)
 100 VAC (B)
 200 VAC (C)
 265 VAC (D)
 Ta : 25 °C

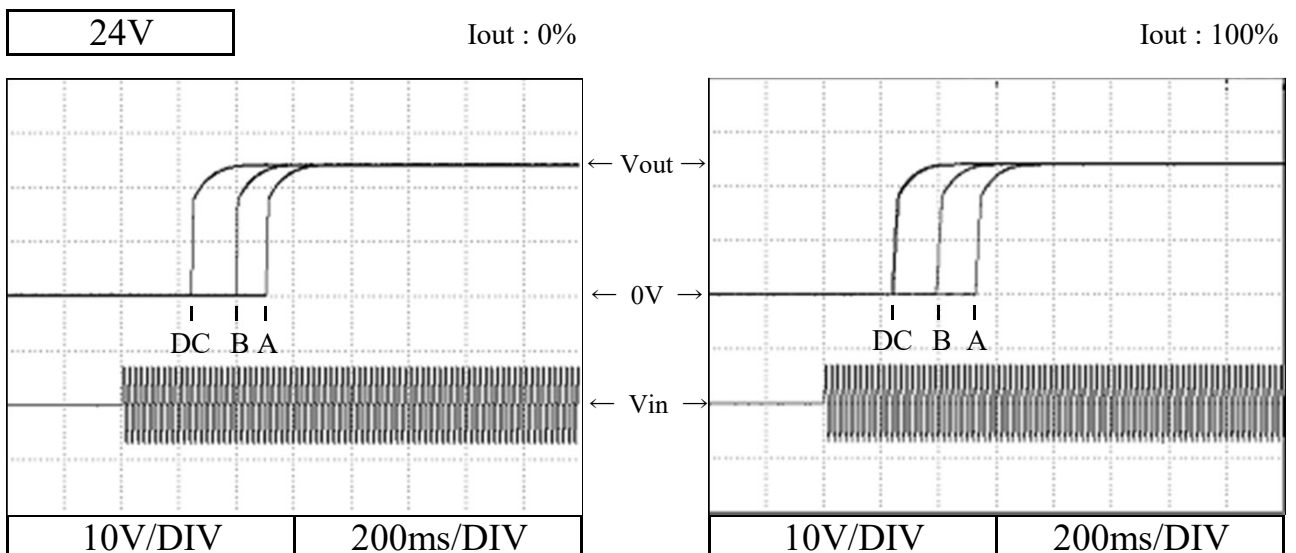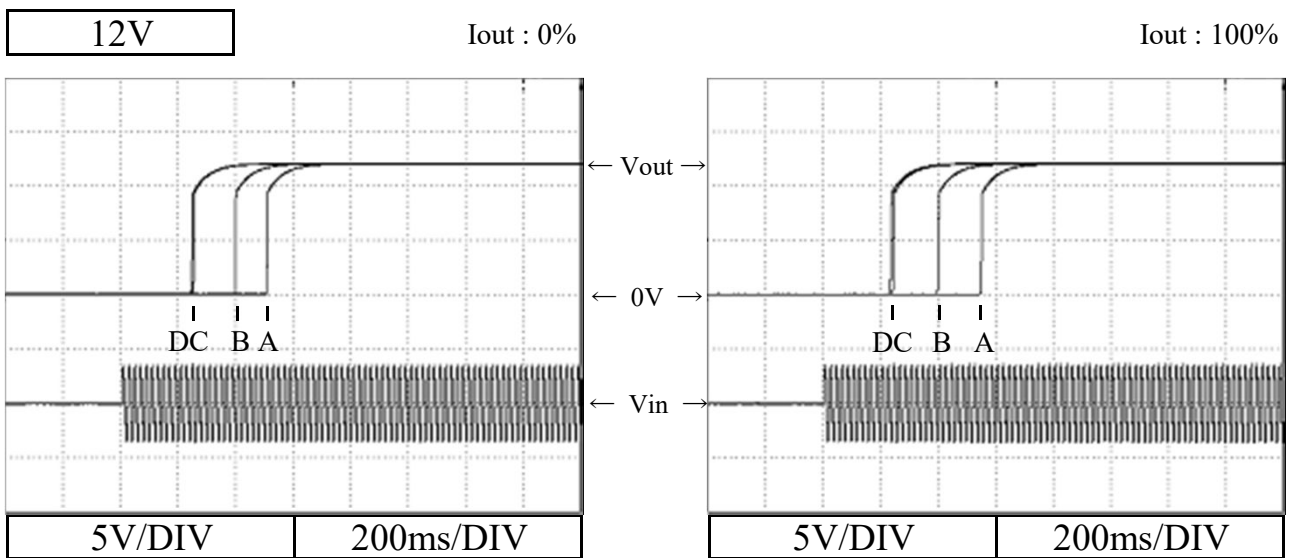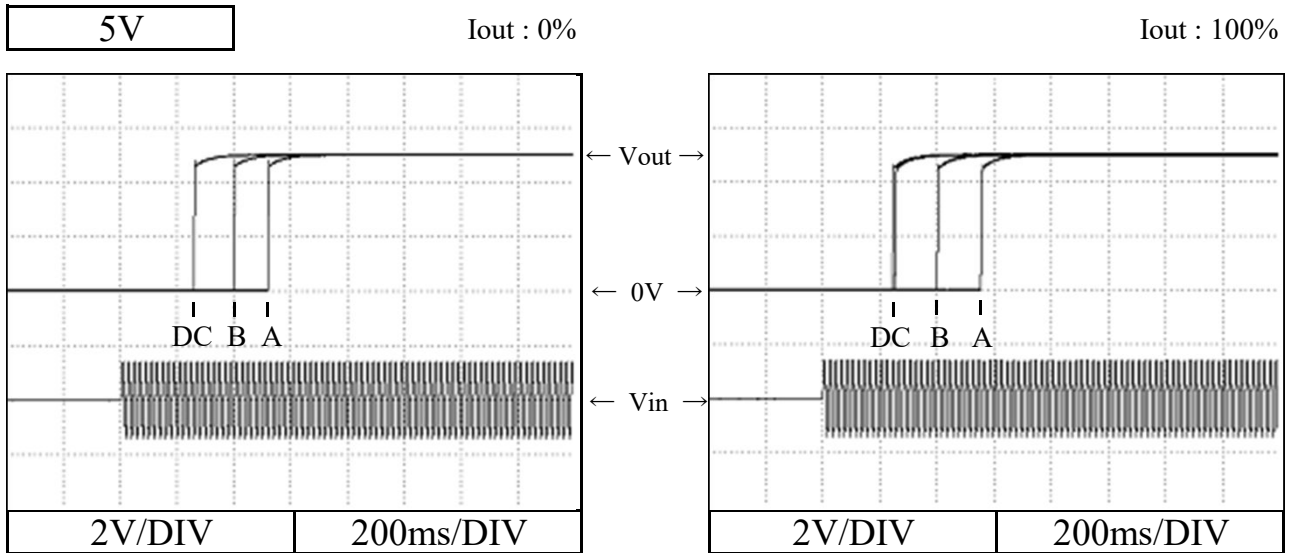

2.5 出力立ち下がり特性

Output fall characteristics

Conditions Vin : 85 VAC (A)
 100 VAC (B)
 200 VAC (C)
 265 VAC (D)
 Ta : 25 °C

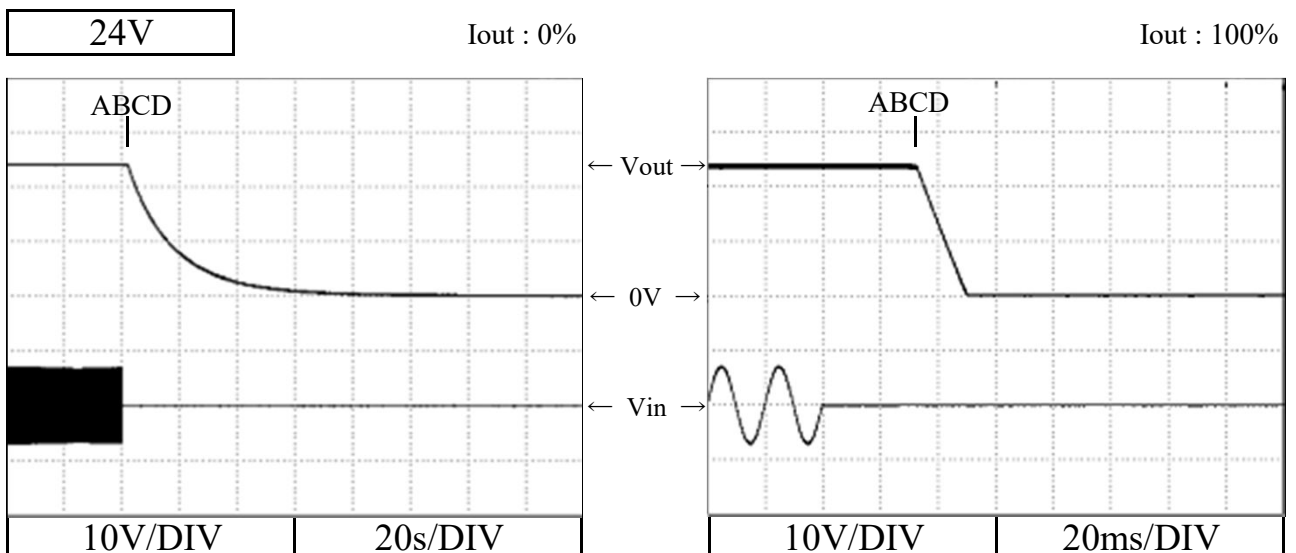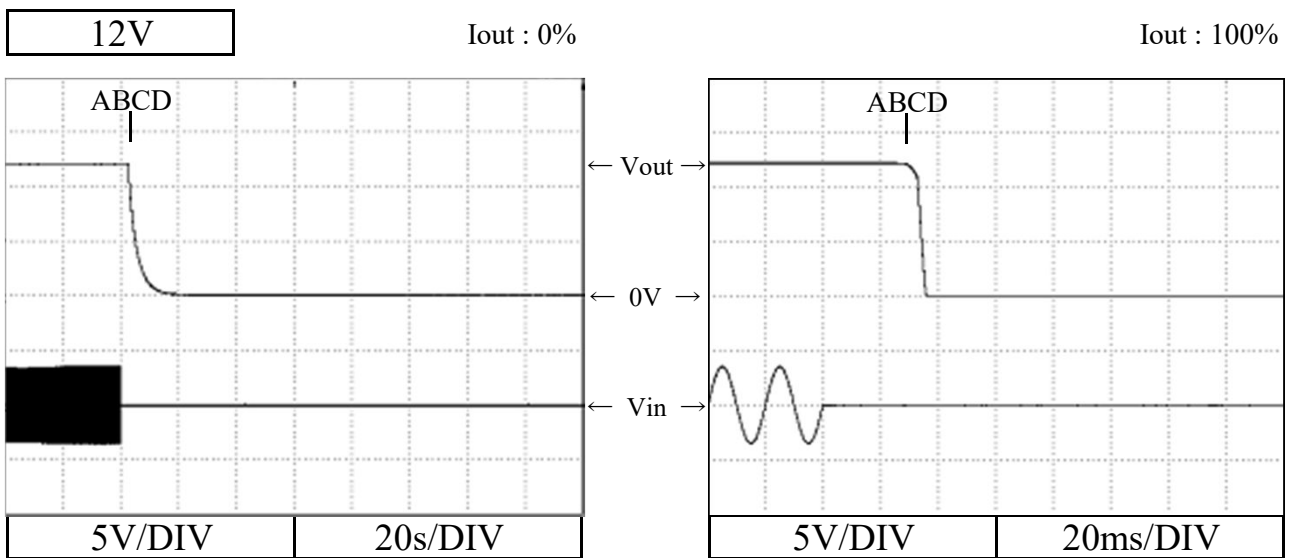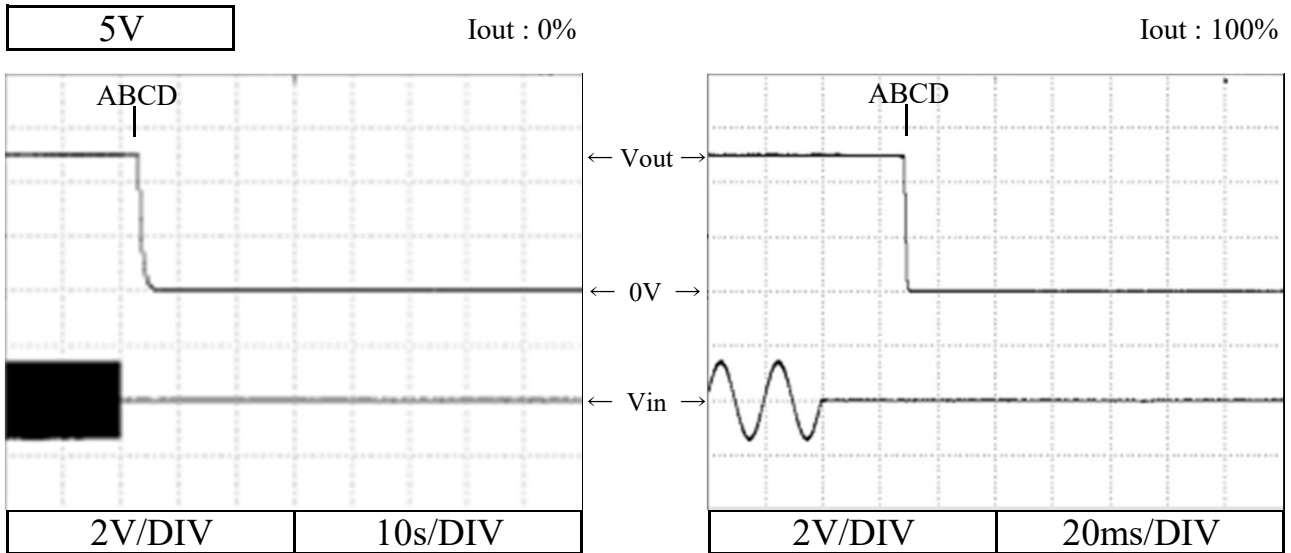


2.6 出力保持時間特性


Hold up time characteristics

Conditions V_{in} : 100 VAC -----
200 VAC ———
 T_a : 25 °C


5V

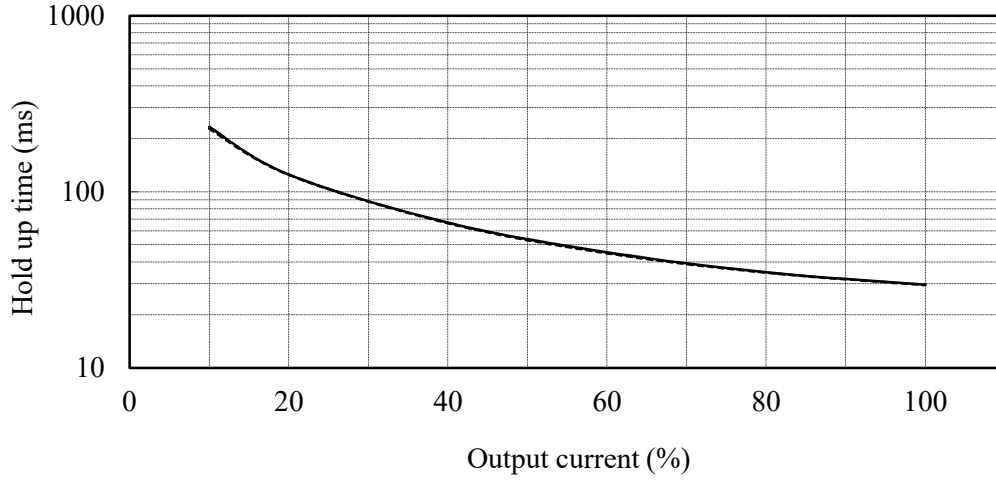

12V

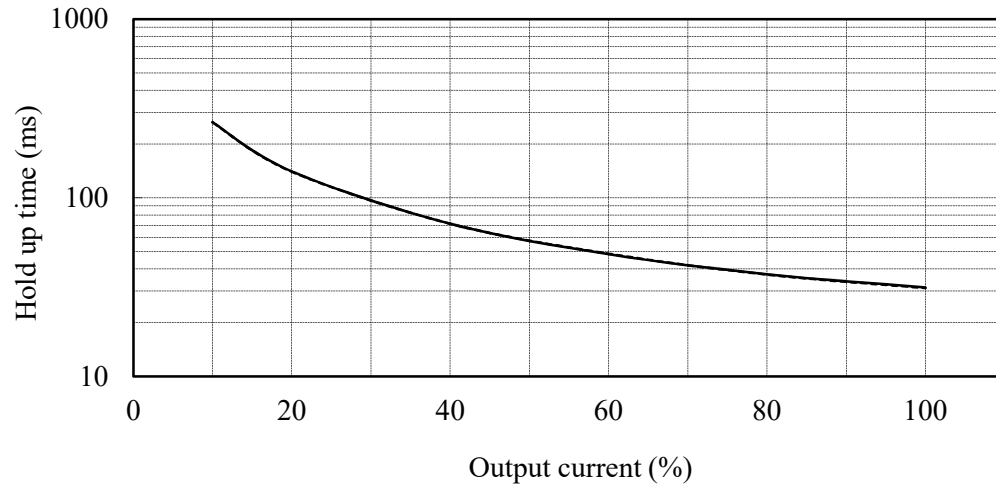


24V

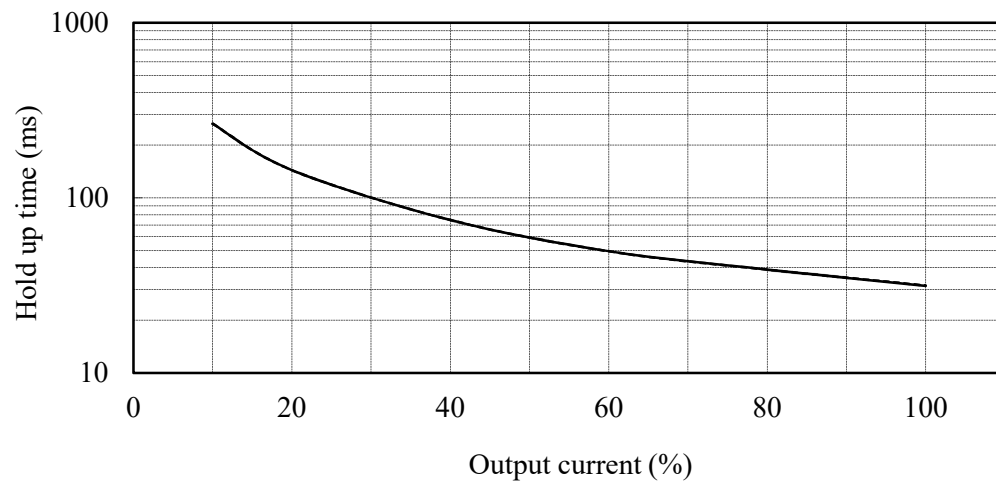

2.7 過渡応答（負荷急変）特性

Dynamic load response characteristics

Conditions V_{in} : 100 VAC
 I_{out} : 50 % \leftrightarrow 100 %
 (tr = tf = 50us)
 T_a : 25 °C

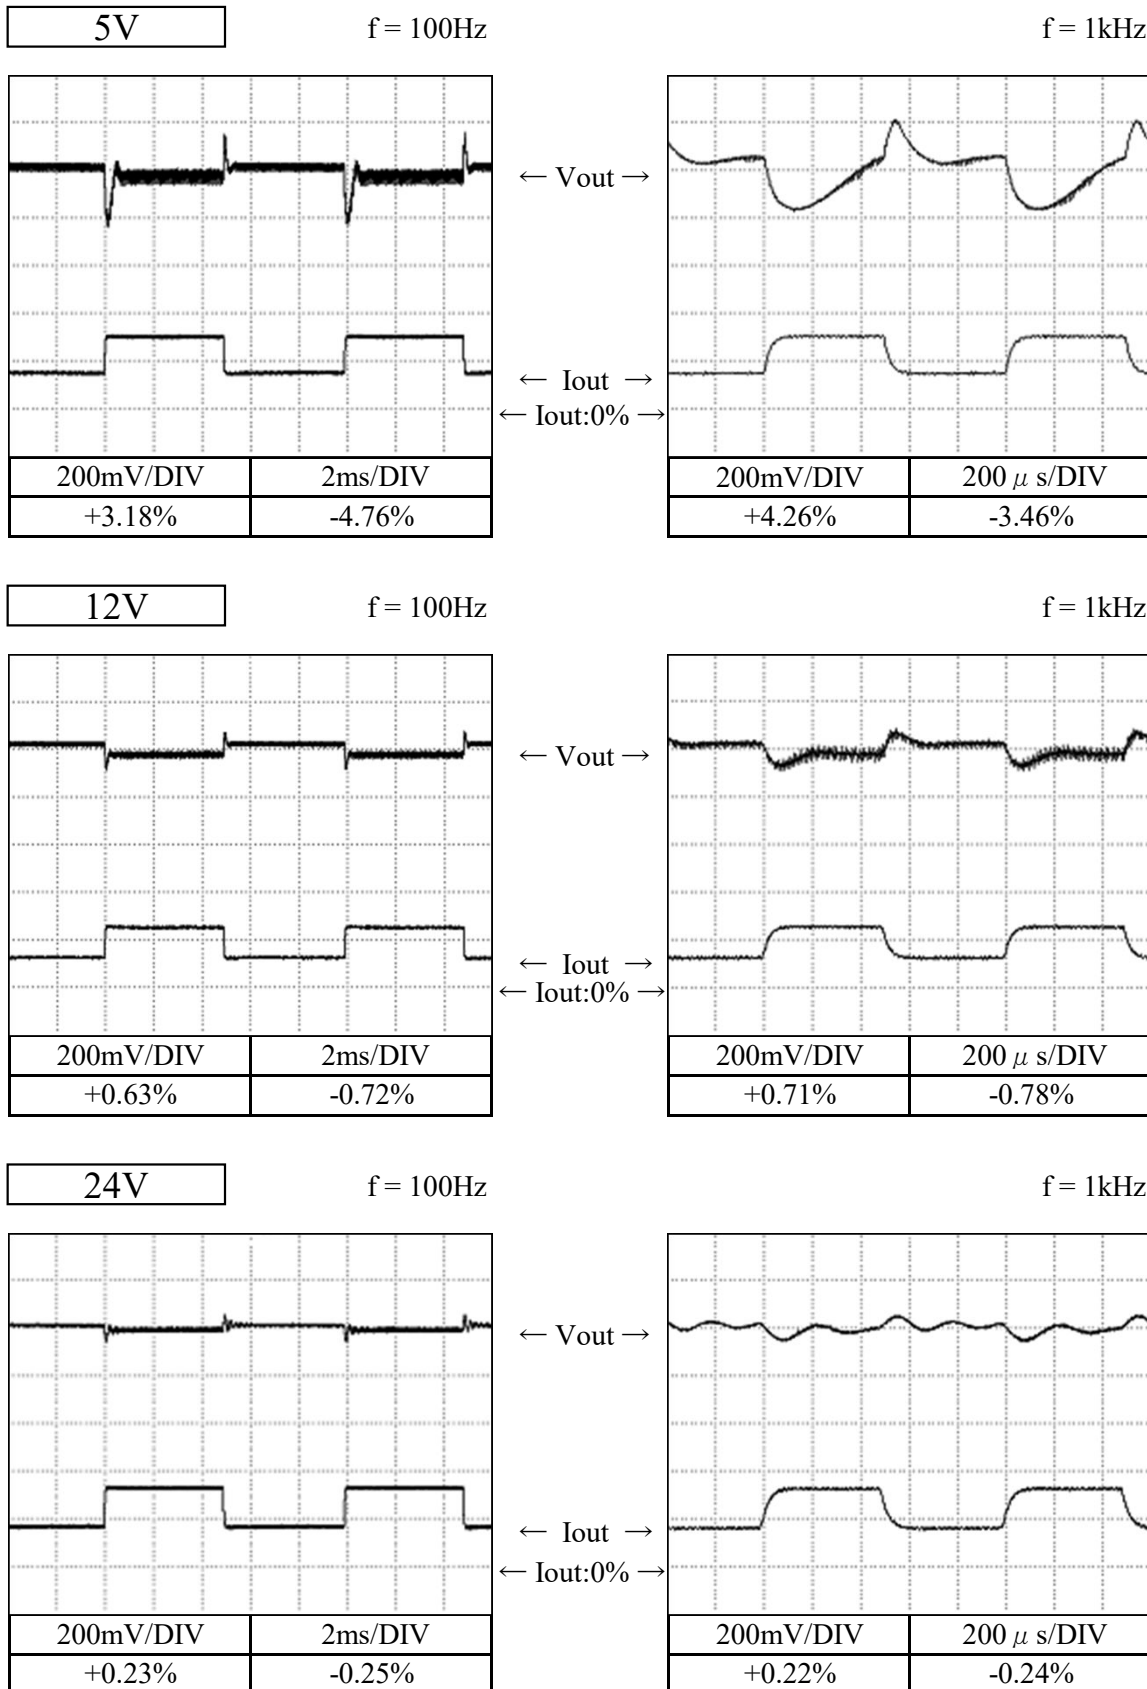

2.8 入力電圧瞬停特性


Response to brown out characteristics

Conditions Vin : 100 VAC
Iout : 100 %
Ta : 25 °C

5V

A = 26ms


B = 27ms

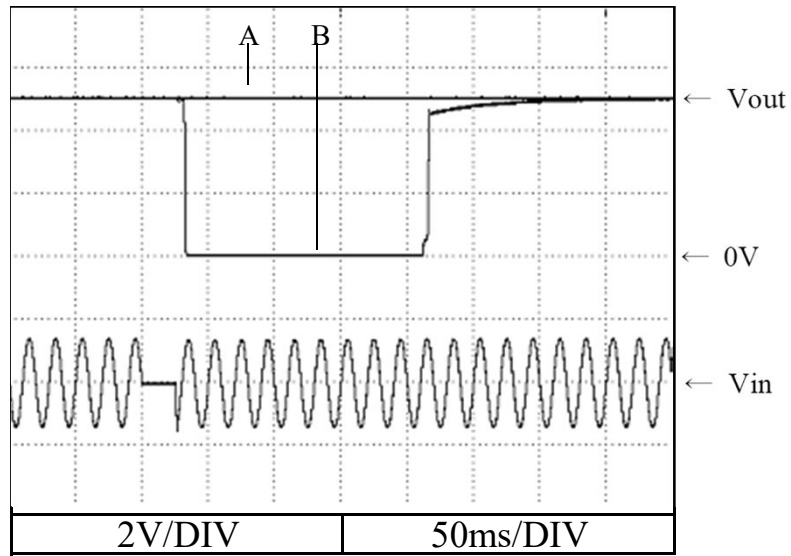

12V

A = 26ms


B = 27ms

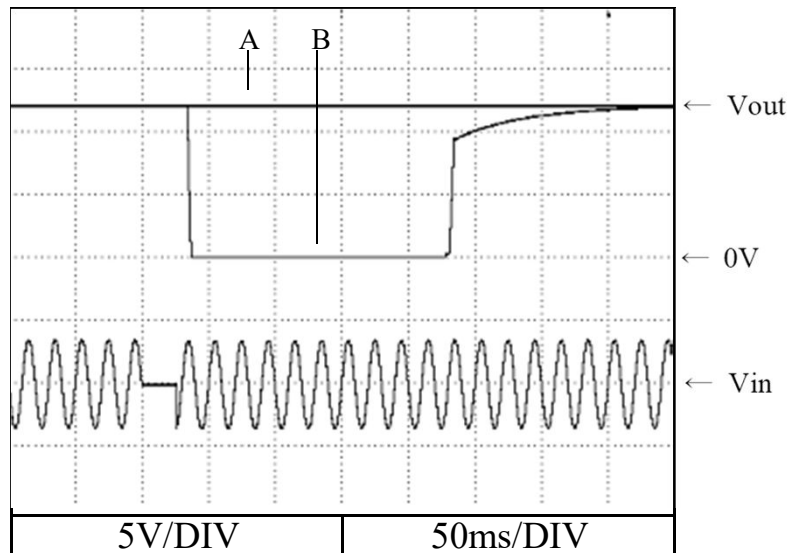

24V

A = 26ms

B = 27ms

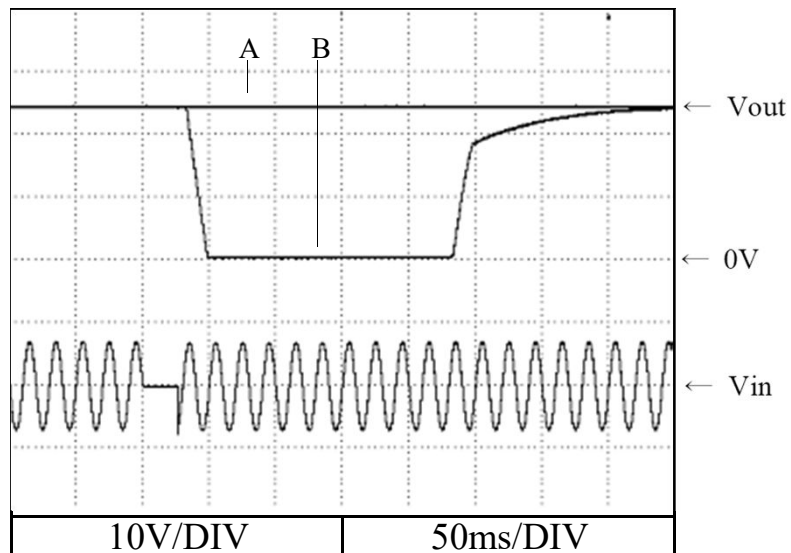

2.8 入力電圧瞬停特性


Response to brown out characteristics

Conditions Vin : 200 VAC
Iout : 100 %
Ta : 25 °C

5V

A = 27ms


B = 28ms

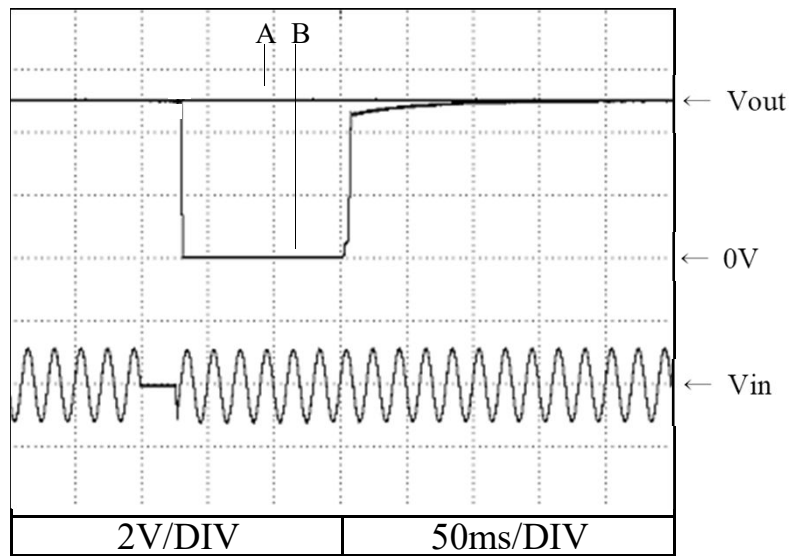

12V

A = 28ms


B = 29ms

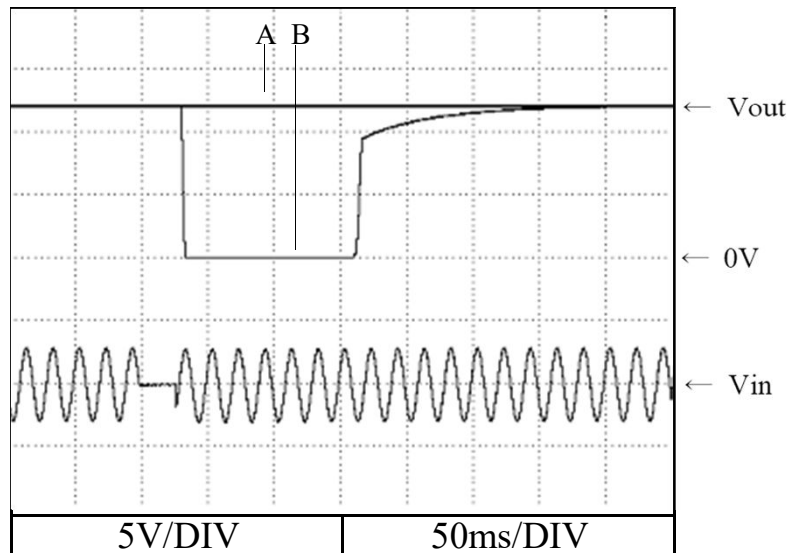

24V

A = 32ms

B = 33ms

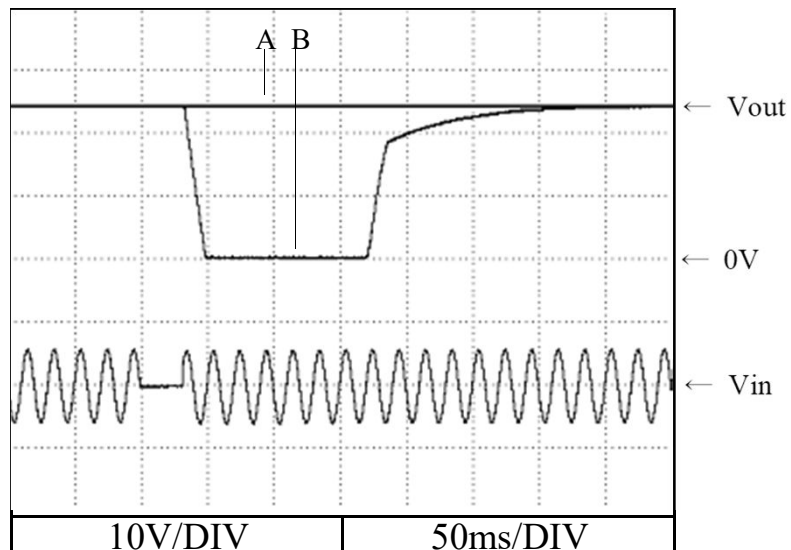


2.9 入力サージ電流 (突入電流) 波形
Inrush current waveform


5V

Conditions Vin : 100 VAC
Iout : 100 %
Ta : 25 °C

Switch on phase angle of input AC voltage
 $\phi = 0^\circ$

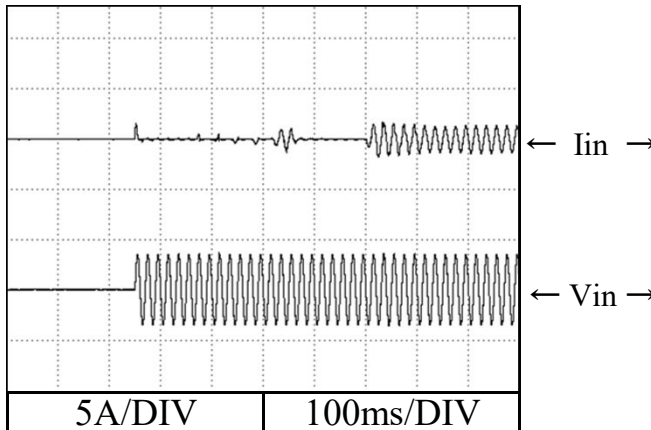


Switch on phase angle of input AC voltage
 $\phi = 90^\circ$

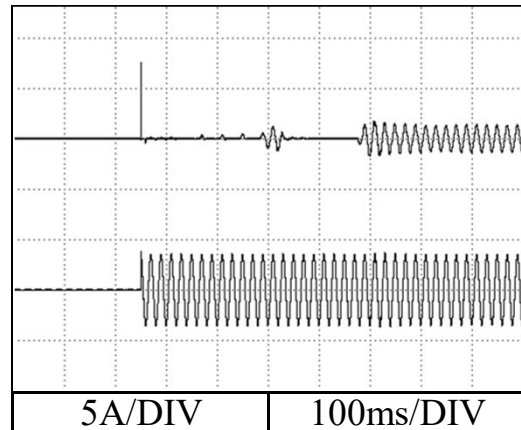


Conditions Vin : 200 VAC
Iout : 100 %
Ta : 25 °C

Switch on phase angle of input AC voltage
 $\phi = 0^\circ$

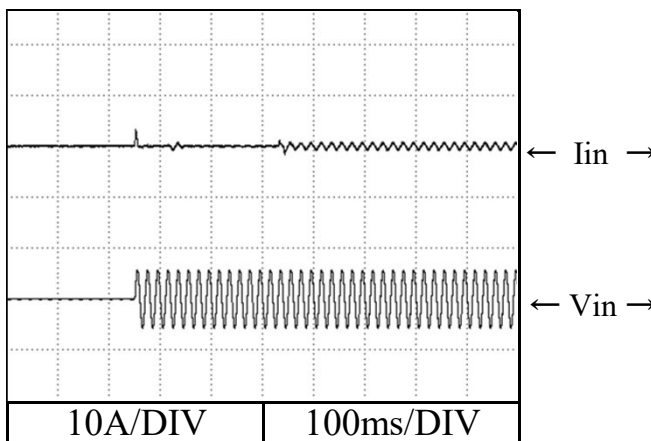

Switch on phase angle of input AC voltage
 $\phi = 90^\circ$


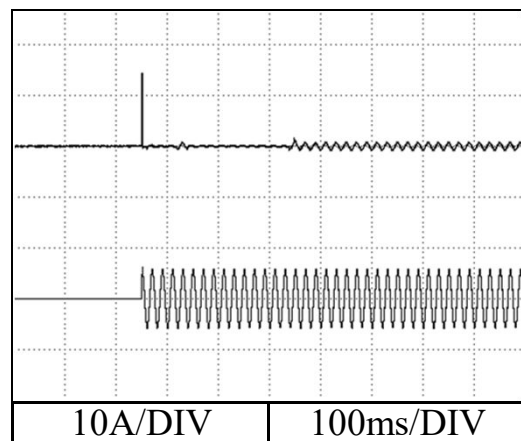


2.10 高調波成分

Input current harmonics

Conditions Iout : 100 %
Ta : 25 °C


5V

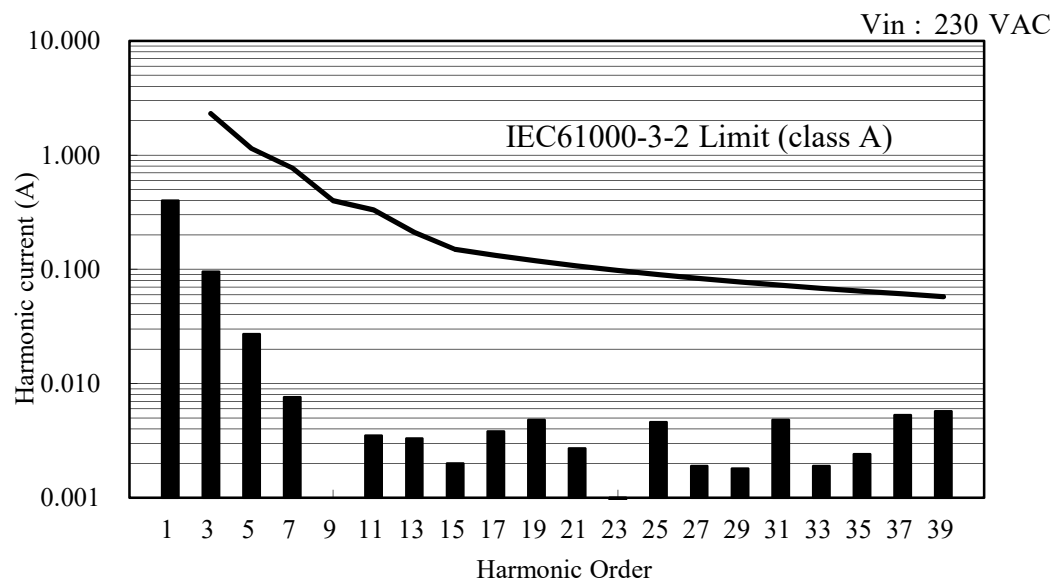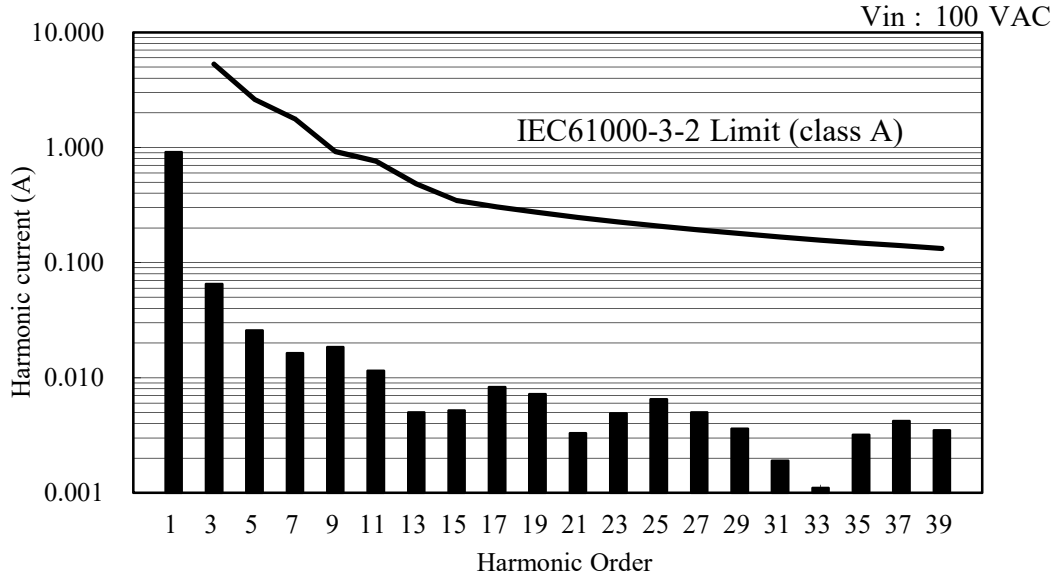

2.11 入力電流波形

Input current waveform

Conditions Iout : 100 %
Ta : 25 °C

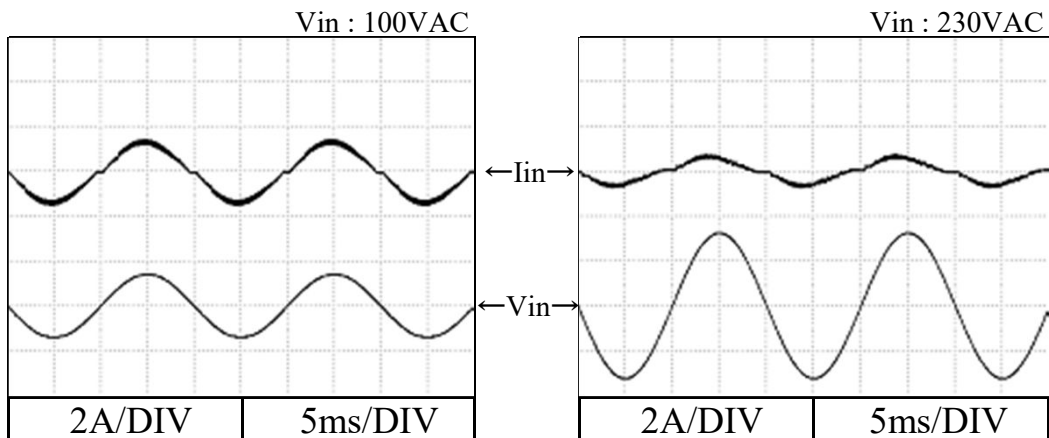


2.12 リーク電流特性 Leakage current characteristics


Conditions Iout : 0 % -----
 100 % ————
 Ta : 25 °C
Equipment used : 3156 (HIOKI)

5V

f: 50 Hz

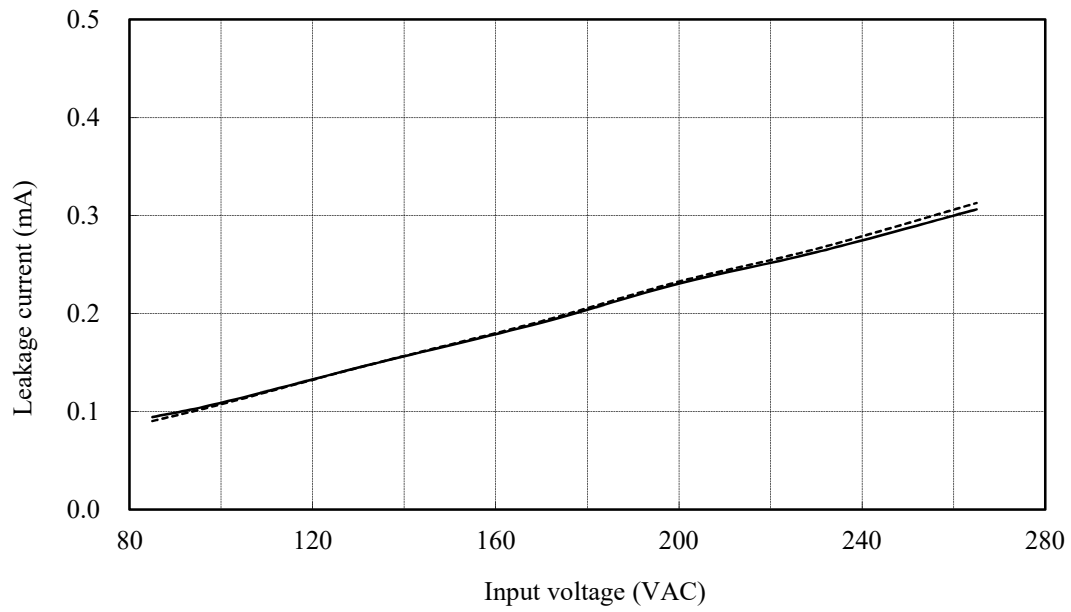


f: 60 Hz

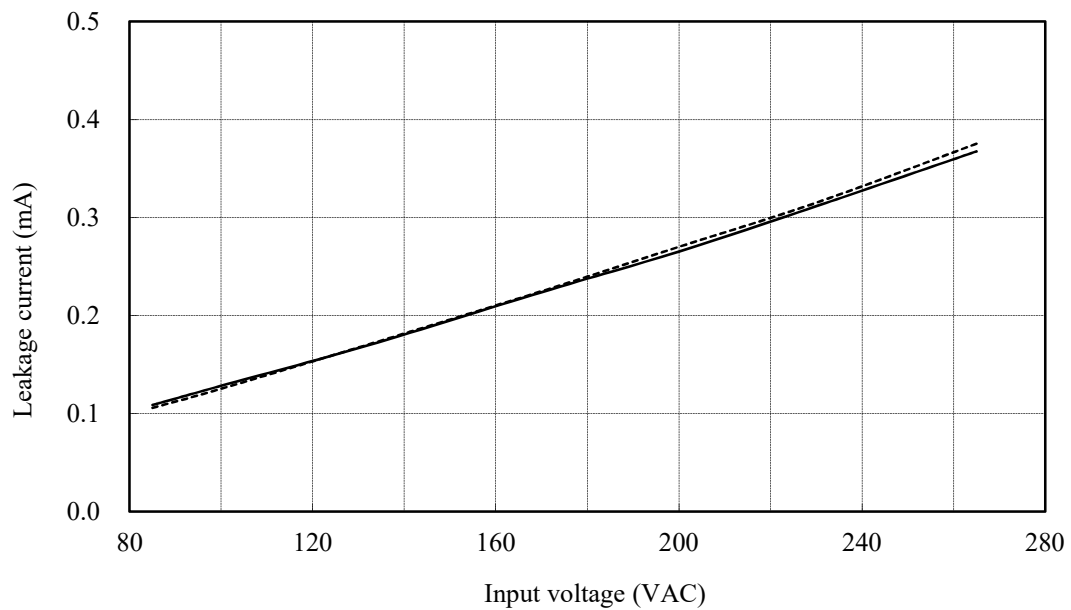


2.13 出力リップル、ノイズ波形 Output ripple and noise waveform

Conditions Vin : 100 VAC
Iout : 100 %
Ta : 25 °C


5V

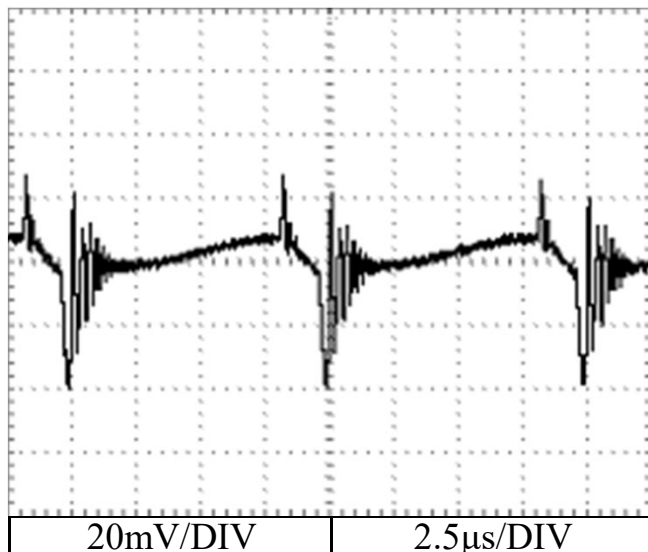

12V

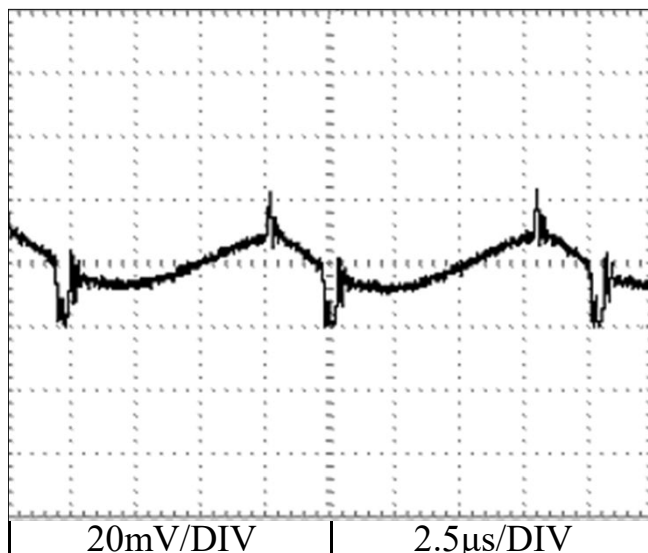

24V

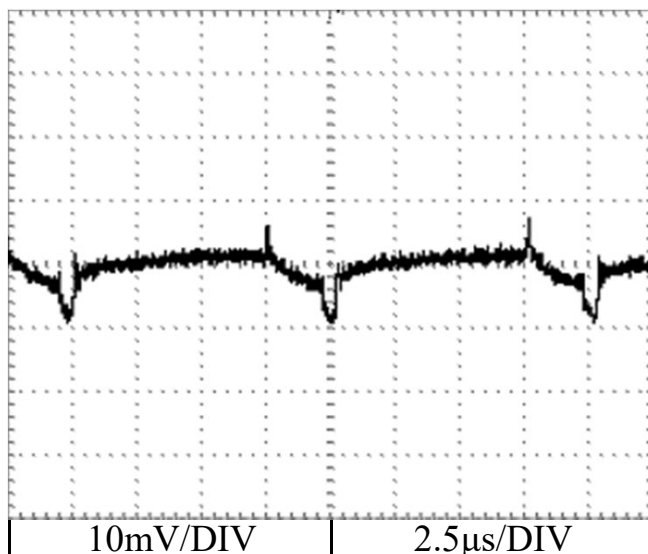

2.14 EMI 特性

Electromagnetic interference characteristics

Conditions Vin : 230 VAC

Iout : 100 %



Ta : 25 °C

雑音端子電圧

Conducted emission

5V

Point A (191kHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	64.0	49.5
AV	54.0	46.8

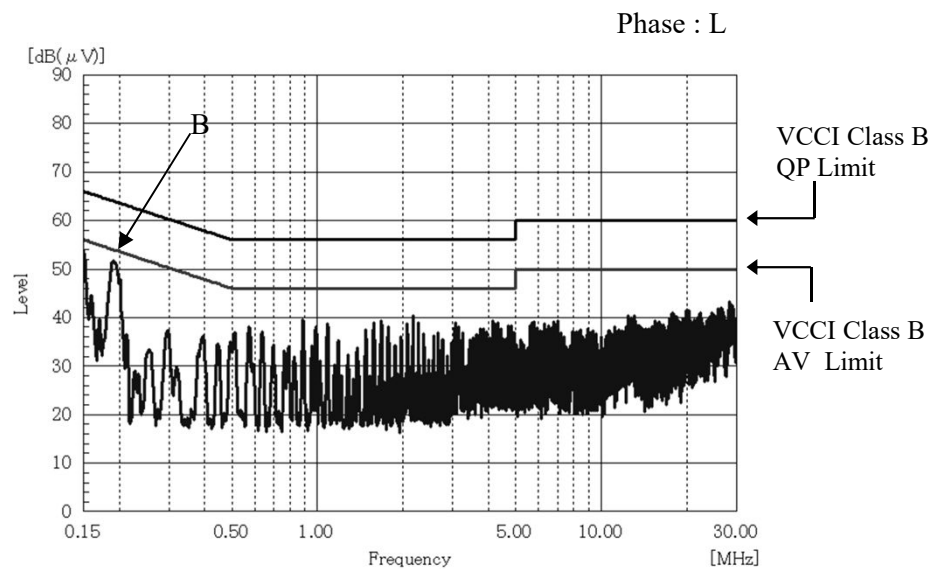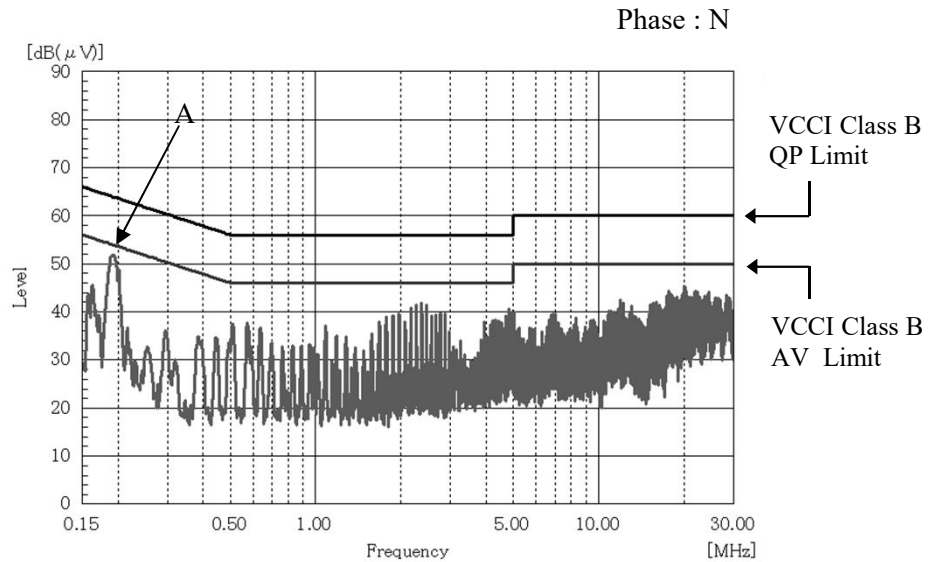

Point B (192kHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	64.0	49.6
AV	54.0	46.8

EN55011-B,EN55032-B,FCC-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55032-B,FCC-B are same as its VCCI class B.

2.14 EMI 特性

Electromagnetic interference characteristics

Conditions Vin : 230 VAC

Iout : 100 %



Ta : 25 °C

雑音端子電圧

Conducted emission

12V

Point A (190kHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	64.0	50.5
AV	54.0	47.2

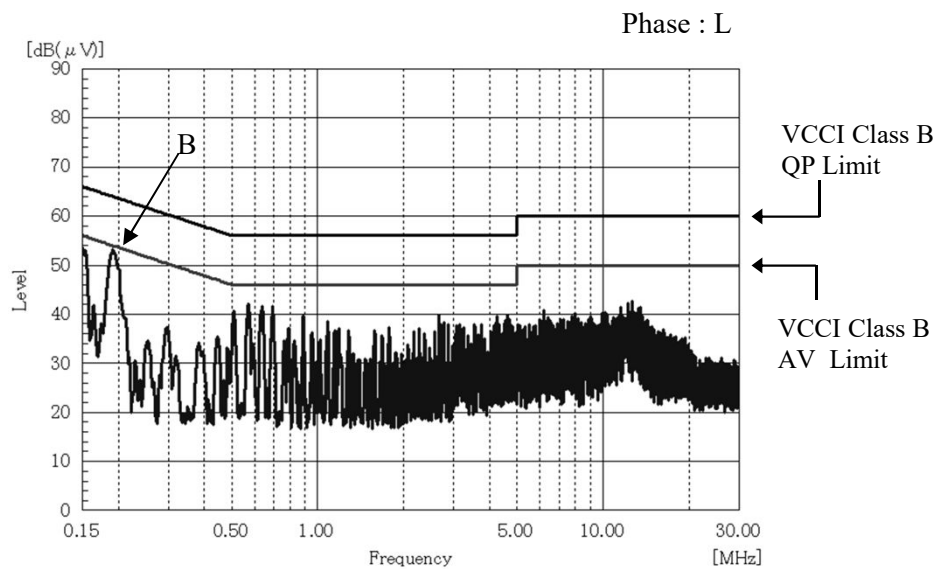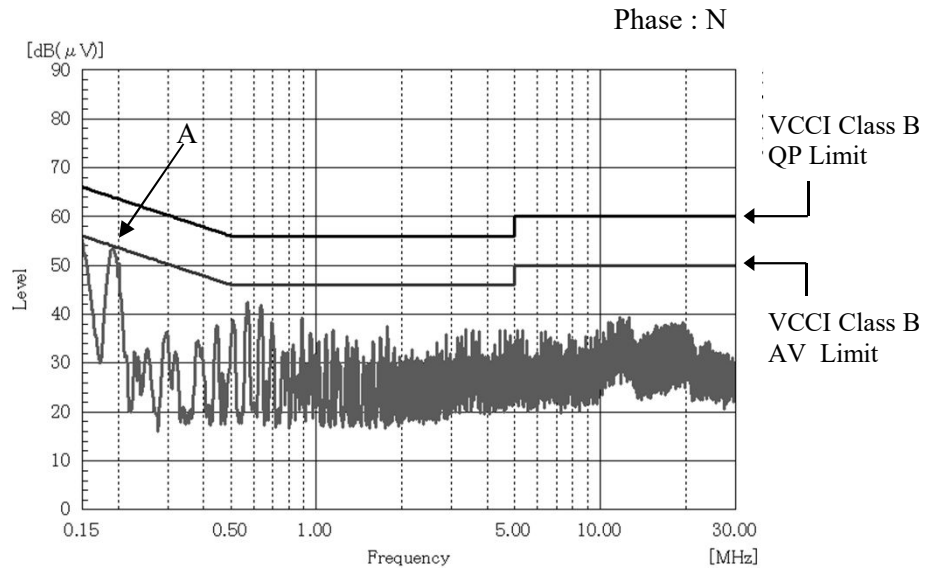

Point B (191kHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	64.0	50.6
AV	54.0	47.3

EN55011-B,EN55032-B,FCC-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55032-B,FCC-B are same as its VCCI class B.

2.14 EMI 特性

Electromagnetic interference characteristics

Conditions Vin : 230 VAC

Iout : 100 %



Ta : 25 °C

雑音端子電圧

Conducted emission

24V

Point A (191kHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	64.0	49.7
AV	54.0	47.0

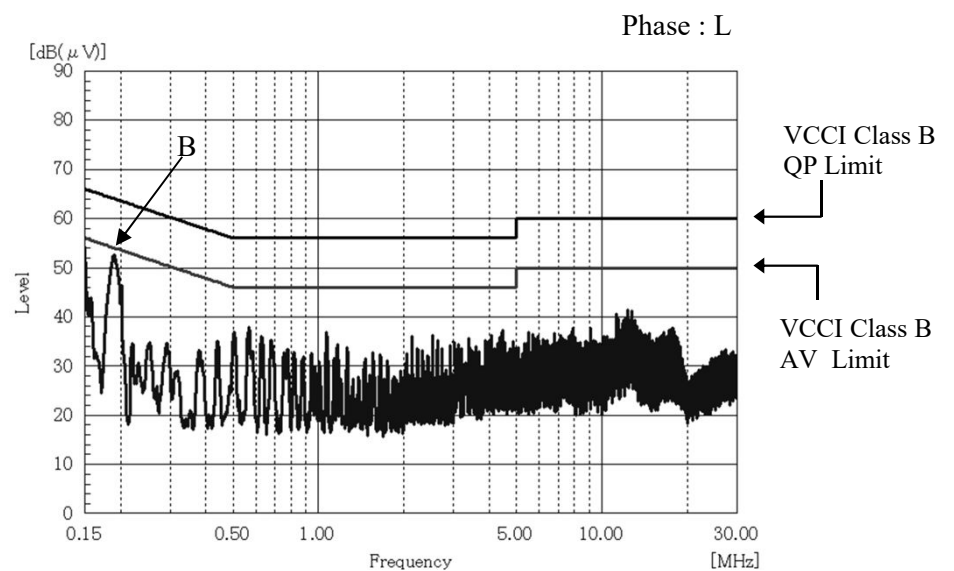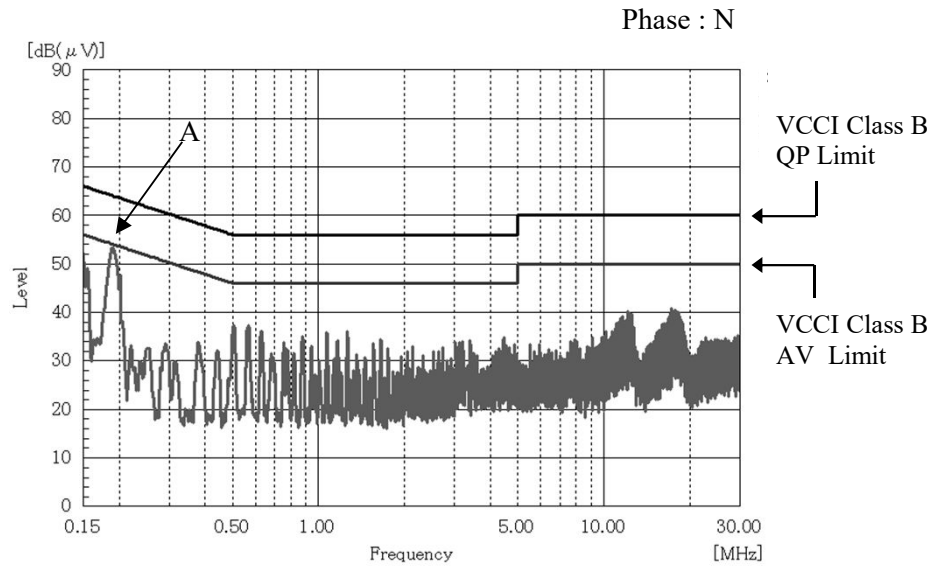

Point B (190kHz)		
Ref. Data	Limit (dBuV)	Measure (dBuV)
QP	64.0	49.9
AV	54.0	47.3

EN55011-B,EN55032-B,FCC-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55032-B,FCC-B are same as its VCCI class B.


2.14 EMI 特性

Electromagnetic interference characteristics

Conditions Vin : 230 VAC
Io : 100 %
Ta : 25 °C

雑音電界強度

Radiated emission

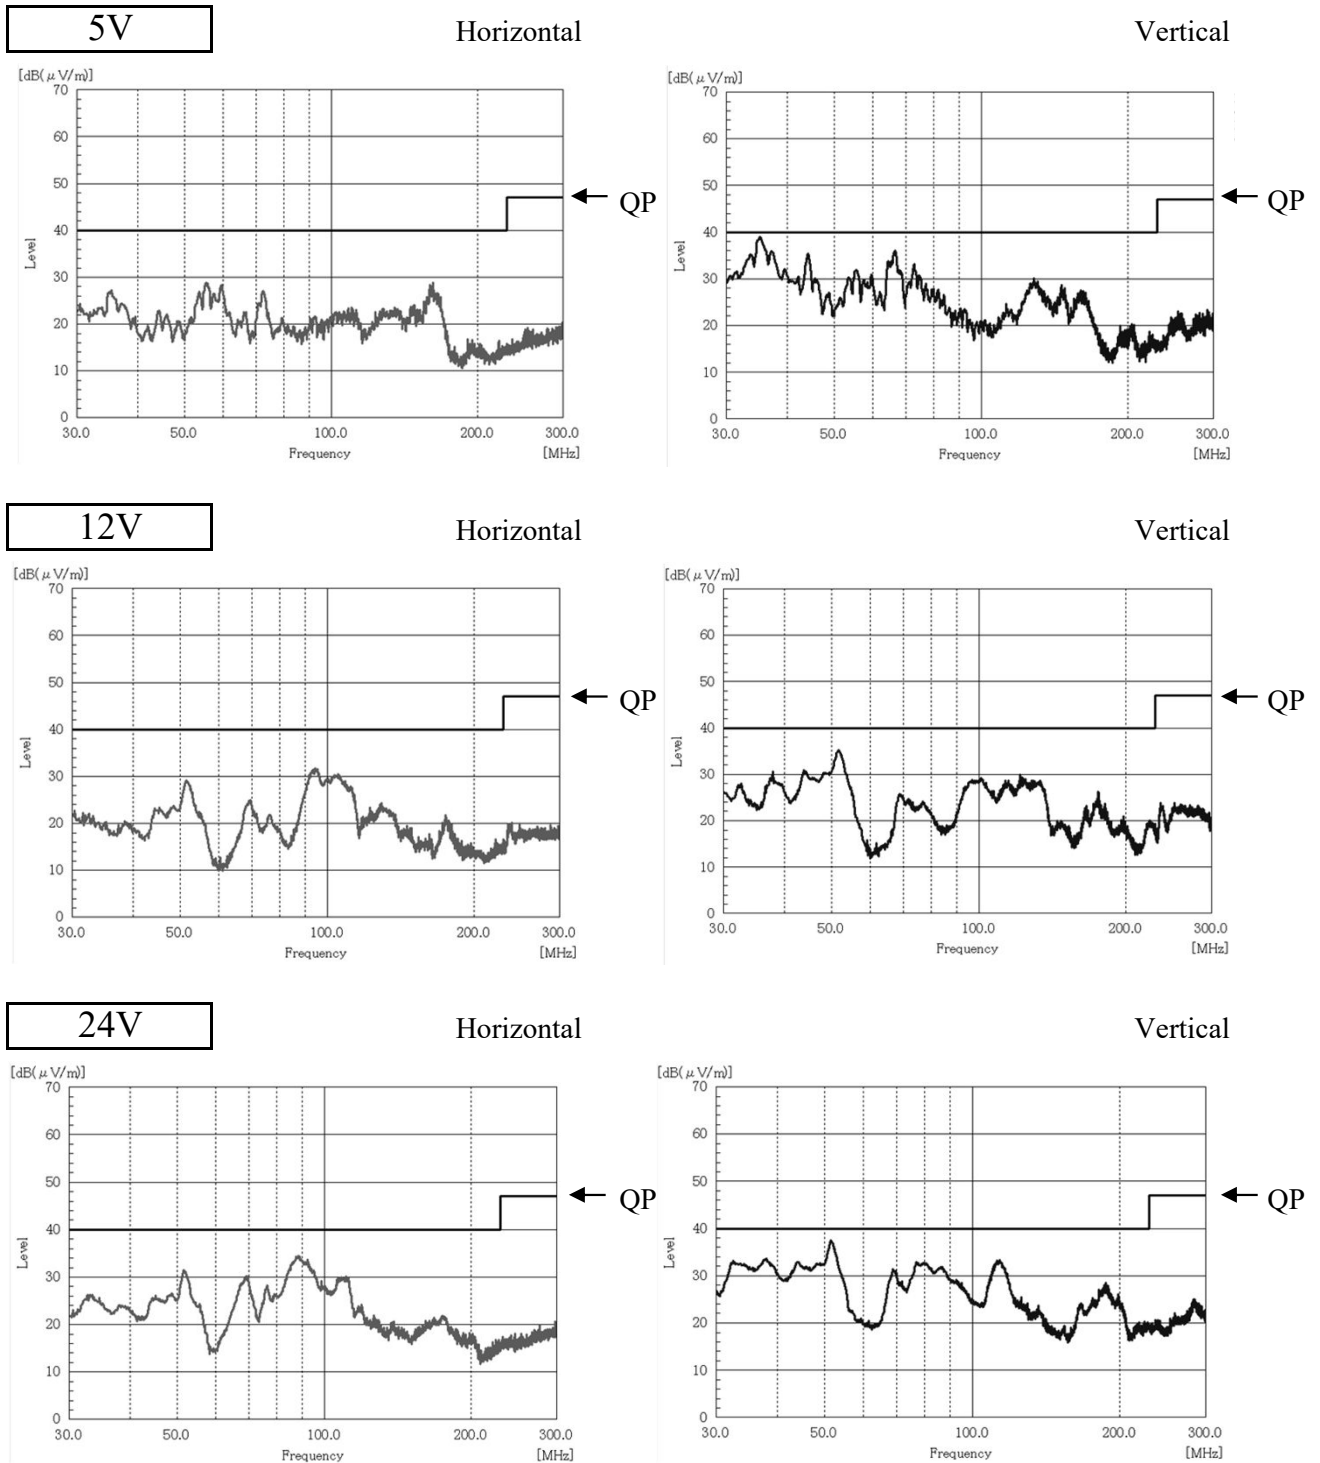

EN55011-B,EN55032-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55032-B are same as its VCCI class B.

表示はピーク値
Indication is peak values.