


LEAD CUT  
LESS THAN 3mm

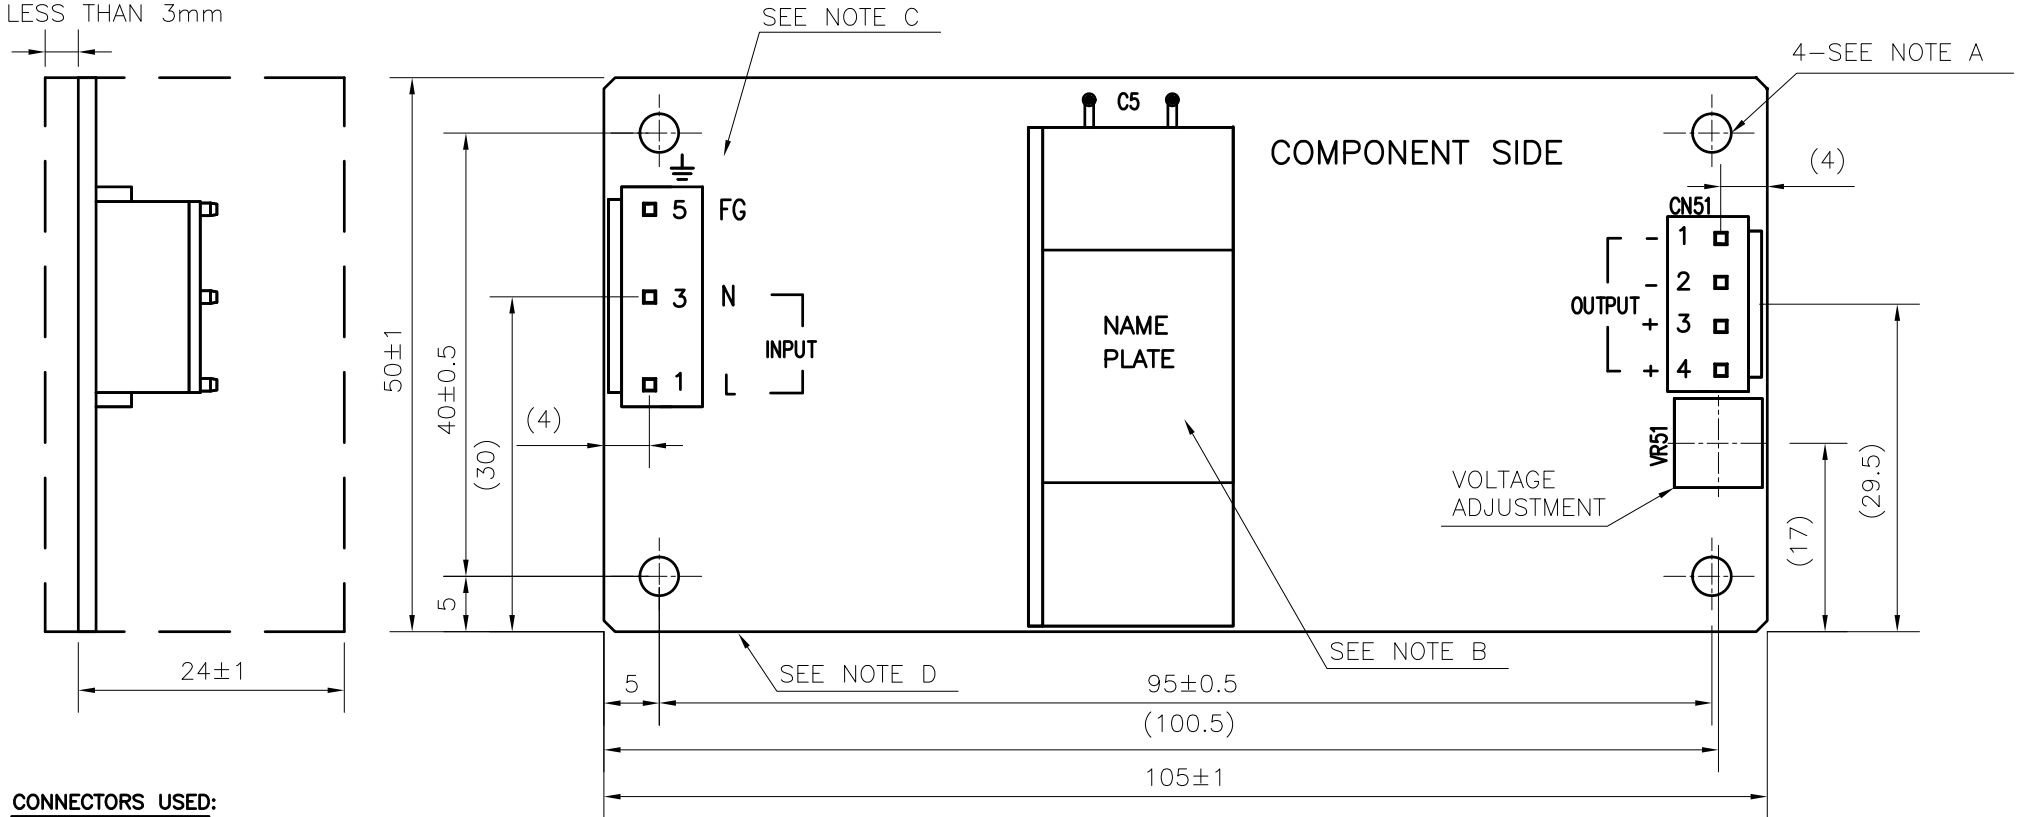

**CONNECTORS USED:**

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (INPUT SIDE CN1)	B3P5-VH	JST	1
PIN HEADER(OUTPUT SIDE CN51)	B4P-VH	JST	1

\*OUTPUT CURRENT OF EACH CONNECTOR PIN MUST BE LESS THAN 5A.

**MATCHING HOUSINGS AND PINS(NOT INCLUDED WITH THE PRODUCT):**

SOCKET HOUSING (CN1)	VHR-5N	JST	1
SOCKET HOUSING (CN51)	VHR-4N	JST	1
TERMINAL PINS	SVH-21T-P1.1	JST	7

HAND CRIMPING TOOL : YC-160R CN1,CN2(CN51) MANUFACTURER : JST

MATCHING WIRE HARNESS :

\* NOT INCLUDED WITH THE PRODUCT,NEED TO PURCHASE SEPARATELY.

PART DESCRIPTION	PART NAME	MANUFACTURER	QTY
INPUT WIRE HARNESS	CA100-33-40	XIAMEN MACRO-S	1
OUTPUT WIRE HARNESS	CA100-33-90A(9cm)	XIAMEN MACRO-S	1
OR OUTPUT WIRE HARNESS	CA100-33-92(5cm)	XIAMEN MACRO-S	1

**NOTES**

- A: THE 4- $\phi$ 3.5 HOLE ARE CUSTOMER CHASSIS MOUNTING HOLES. ALL MUST BE SCREWED IN ORDER TO CONFORM THE VIBRATION SPEC.
- B: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, NOMINAL OUTPUT CURRENT, PEAK OUTPUT CURRENT AND SAFETY MARKING(FOR ONLY APPROVED PRODUCTS)ARE SHOWN ON THE NAME PLATE IN ACCORDANCE WITH THE SPECIFICATIONS. COUNTRY OF MANUFACTURE WILL BE SHOWN ON THE NAME PLATE.
- C:  $\perp$  IS FOR SAFETY GROUND CONNECTION.
- D: TO KEEP THE DISTANCE MORE THAN 4mm BETWEEN PC-BOARD EDGE AND CUSTOMER'S CHASSIS.

(unit : mm)

MODEL NAME	CUS20E
<b>TDK-Lambda</b>	

CA860-02-01C