

# HFE2500

## EVALUATION DATA

DWG. No. IA689-53-01		
APPD	CHK	DWG
Doron P. Dec-18-11	<i>Di P</i> 13-Dec-11	<i>DOTAN</i> 13.12.11


# INDEX

	<b>PAGE</b>
<b>1. Evaluation Method</b>	
1-1. Circuit used for determination	T-1~6
(1) Steady state data	
(2) Warm up voltage drift & long term stability	
(3) Over voltage protection (OVP) characteristics	
(4) Over current protection (OCP) characteristics	
(5) Output rise characteristics	
(6) Output fall characteristics	
(7) Dynamic line response characteristics	
(8) Dynamic load response characteristics	
(9) Inrush current characteristics	
(10) Leakage current characteristics	
(11) Output ripple and noise waveform	
(12) Standby current	
1-2. List of equipment used	T-7
<b>2. Characteristics</b>	
2.1 Steady state data	
(1) Regulation - line and load, Temperature drift, Start-up voltage	T-8~10
(2) Output voltage and ripple noise voltage vs. Input voltage	T-11
(3) Efficiency and Input current vs. Output current	T-12
2.2 Warm up voltage drift characteristics	T-13
2.3 Over voltage protection (OVP) characteristics	T-14
2.4 Over current protection (OCP) characteristics	T-15
2.5 Output rise characteristics	T-16~17
2.6 Output fall characteristics	T-18~19
2.7 Output rise characteristics with ON/OFF CONTROL	T-20~21
2.8 Output fall characteristics with ON/OFF CONTROL	T-22~23
2.9 Hold up time characteristics	T-24
2.10 Dynamic line response characteristics	T-25
2.11 Dynamic load response characteristics	T-26~28
2.12 Response to brown out characteristics	T-29~30
2.13 Inrush current characteristics	T-31
2.14 Inrush current waveform	T-32~33
2.15 Input current waveform	T-34
2.16 Leakage current characteristic	T-35
2.17 Output ripple and noise waveform	T-36~37
2.18 Standby current	T-38


# 1.EVALUATION METHOD

## 1-1.Circuits used for determination


### (1) Steady state data

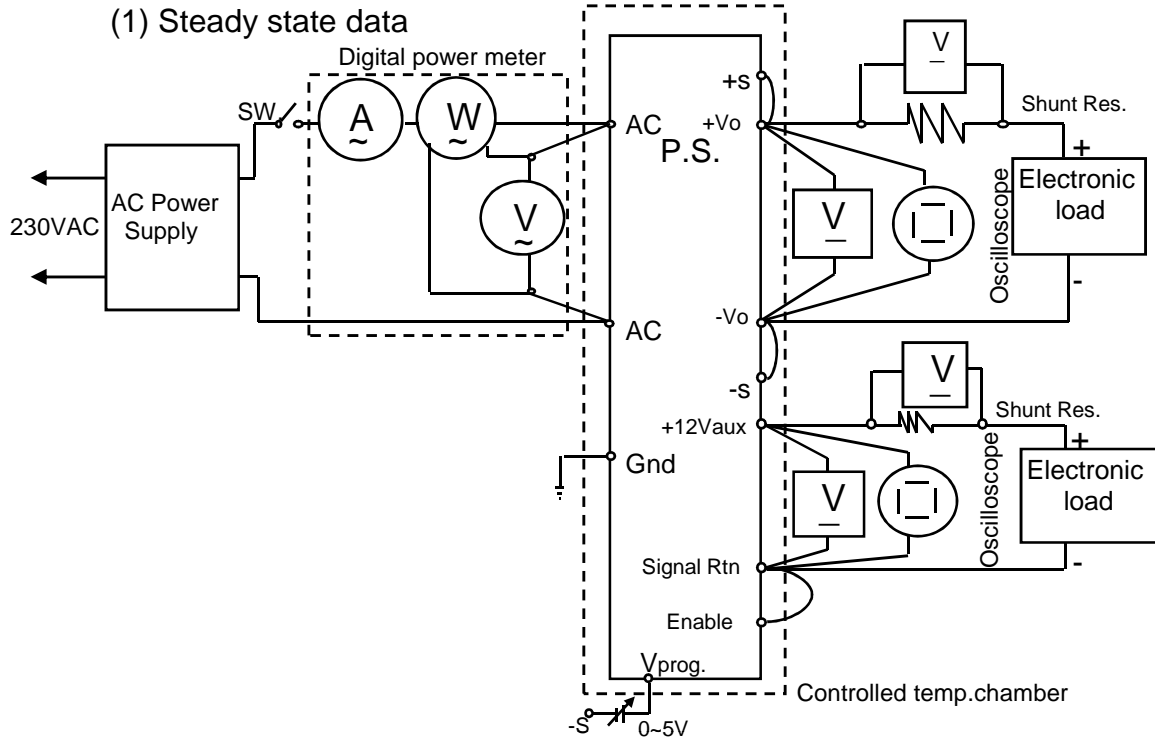

### (2) Warm up voltage drift & temperature stability

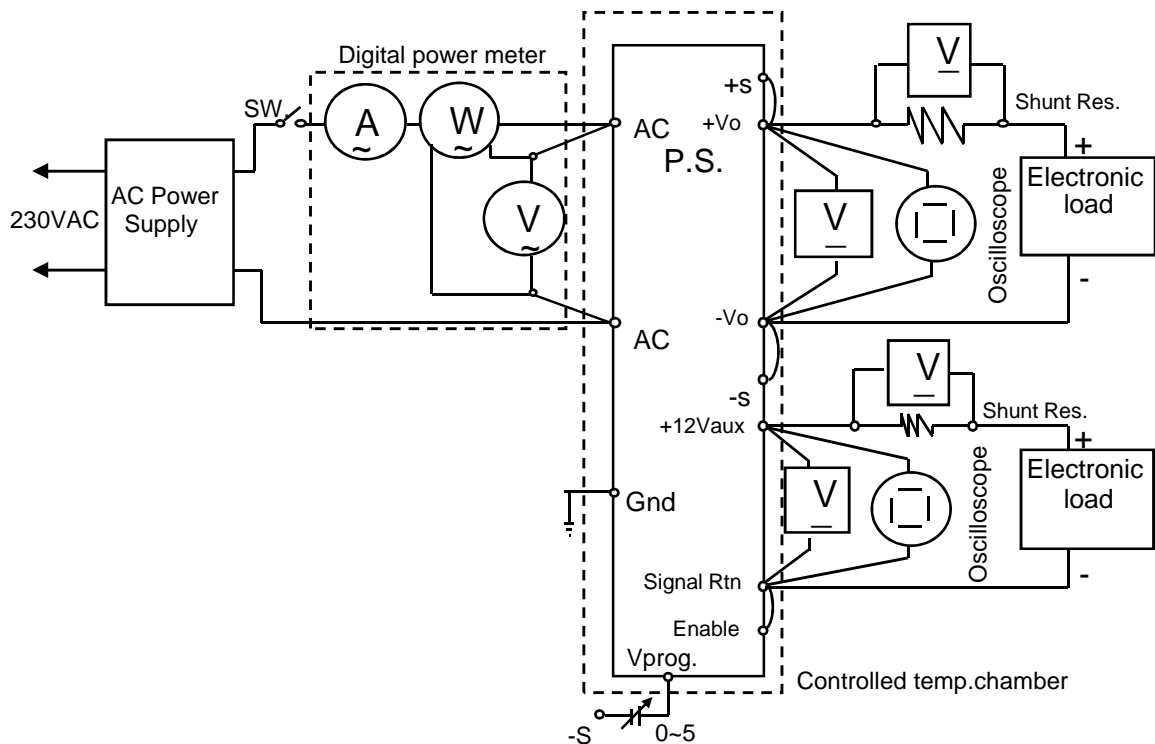


(3) Over Voltage Protection (OVP) characteristics

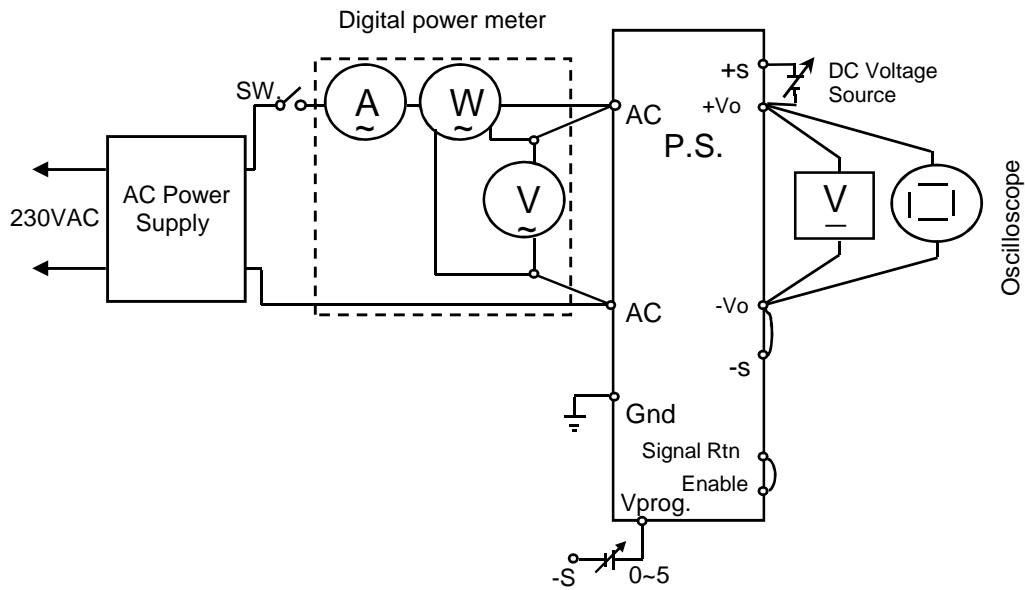


(4) Over Current Protection (OCP) characteristics

Same as item (1)


(5) (6) Output Rise & Fall Characteristics

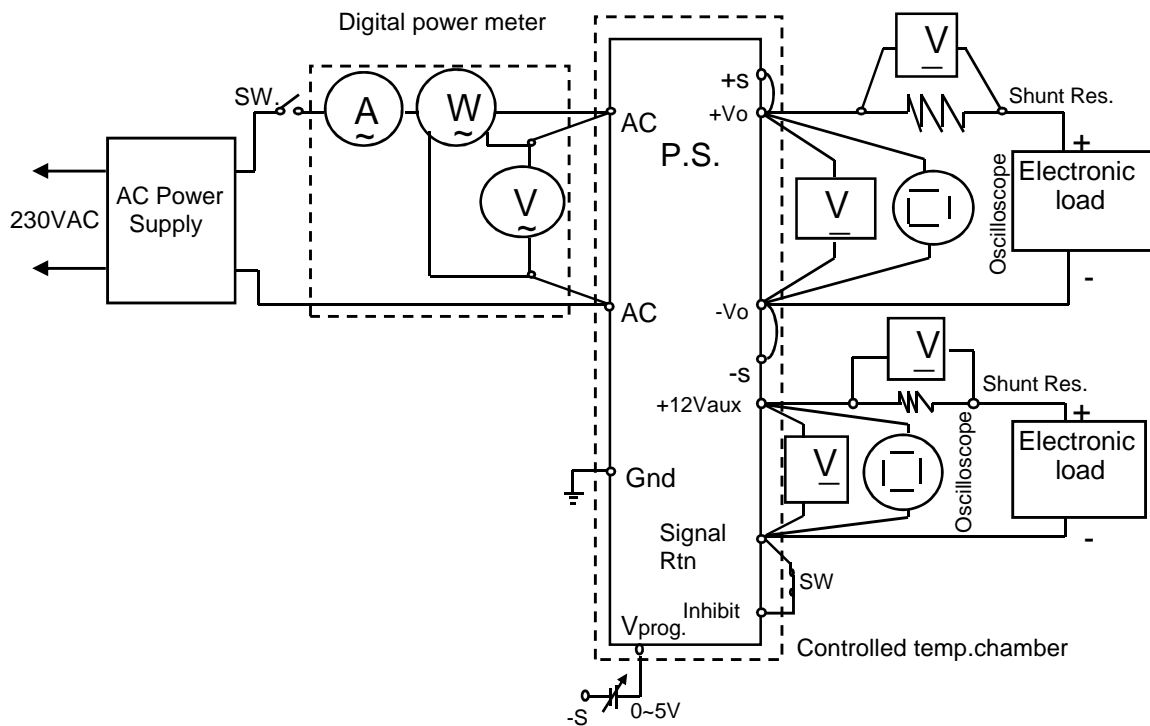

(7) Dynamic line response characteristics

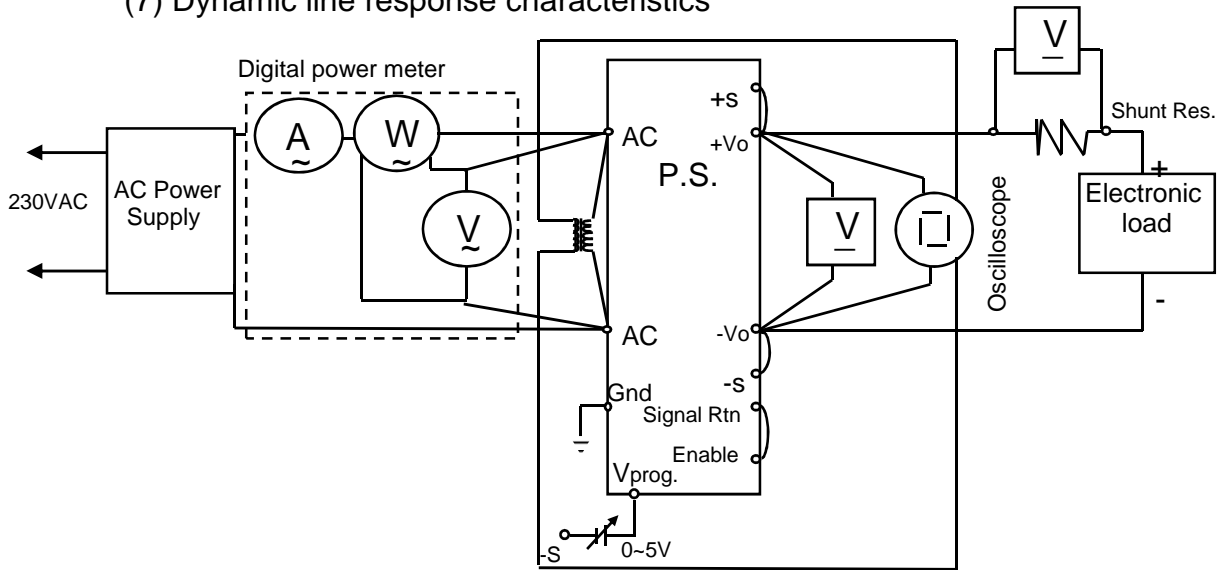


(8) Dynamic load response characteristics

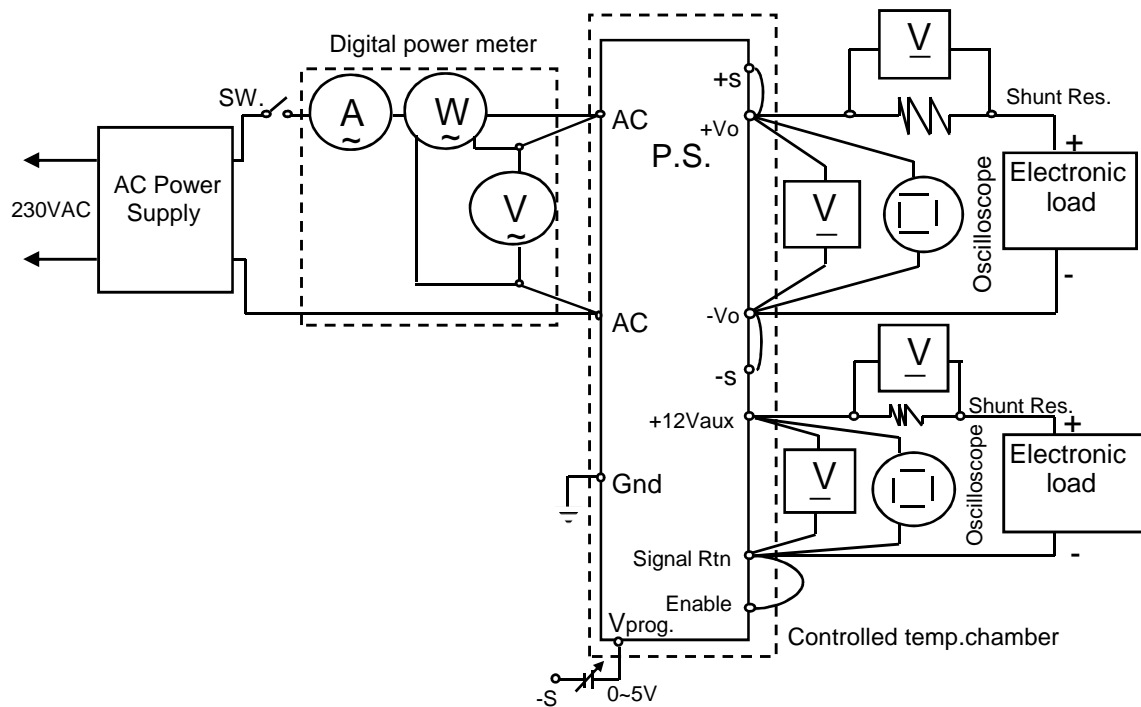


Dynamic load response characteristics

Output current waveform  
I<sub>out</sub> 0% <---> 100%

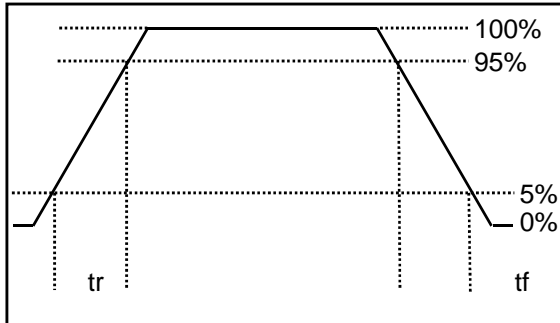


tr = 100µs  
tf = 100µs

Output current waveform  
I<sub>out</sub> 50% <---> 100%

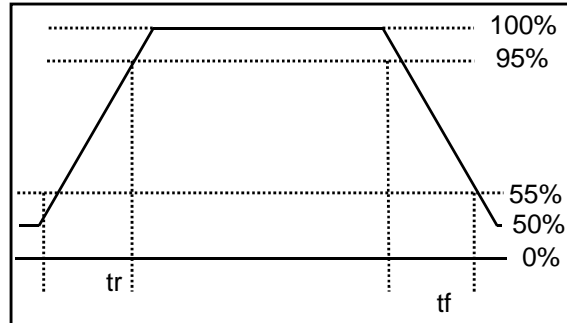


tr = 100µs  
tf = 100µs

(9) Inrush current characteristics

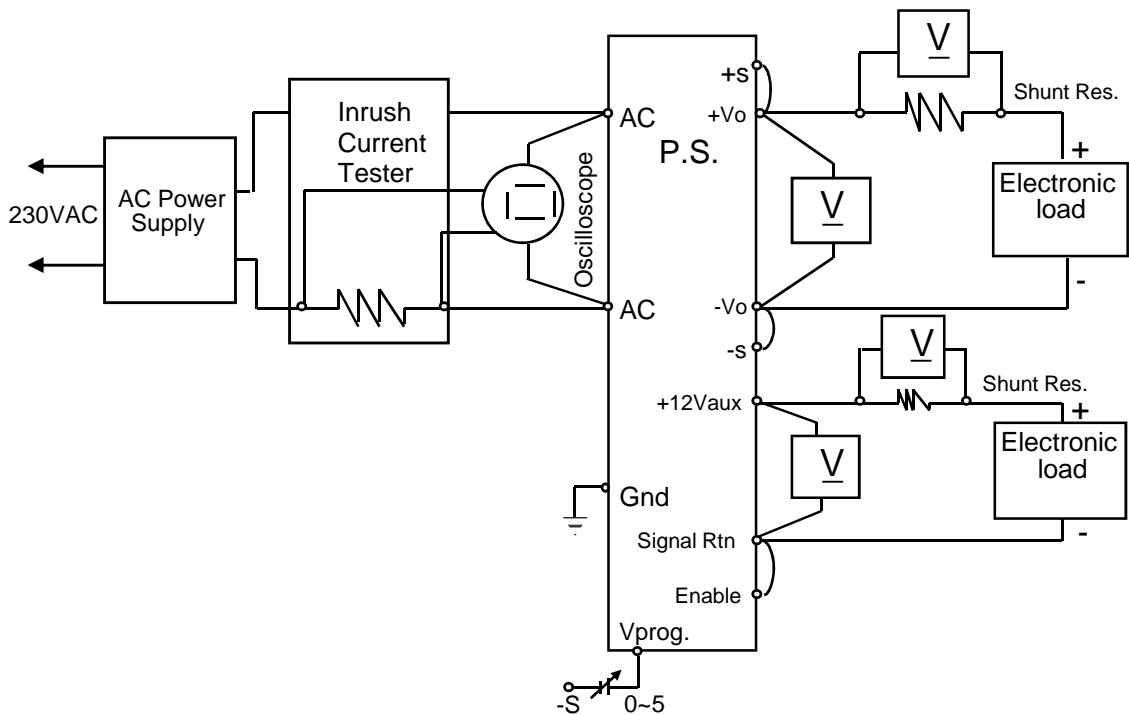


(10) Leakage current characteristics

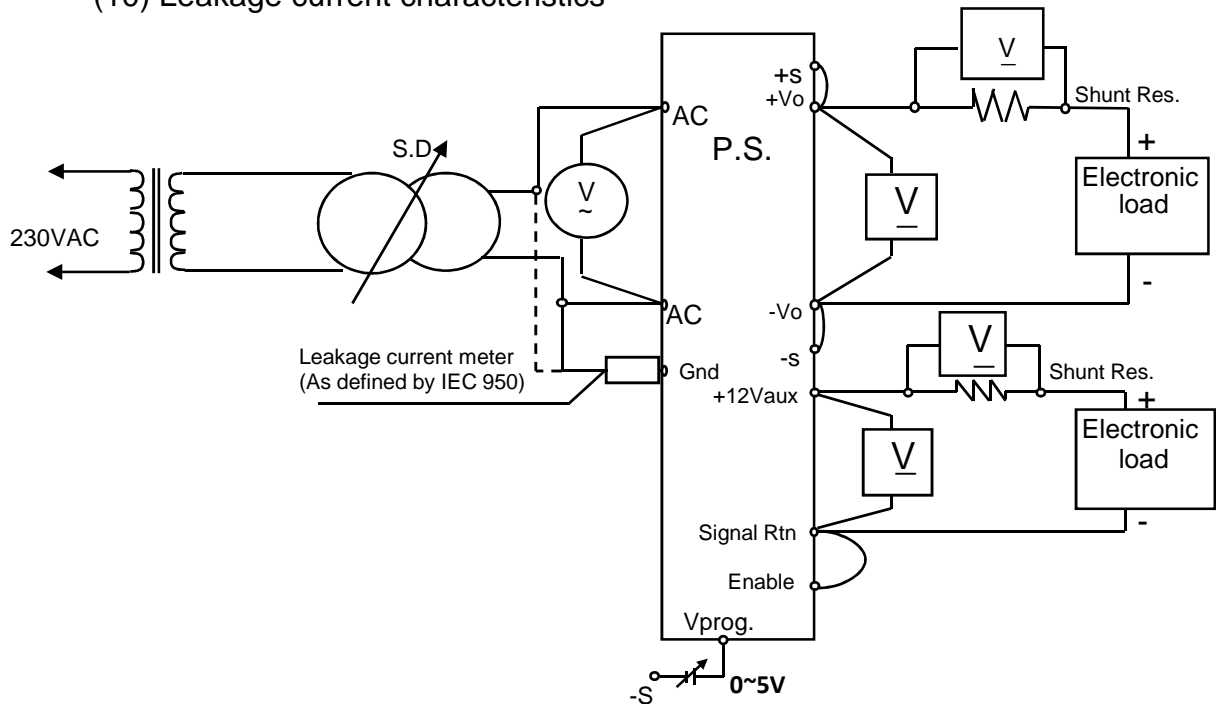


(11) Output ripple & noise waveform


(a) Normal mode

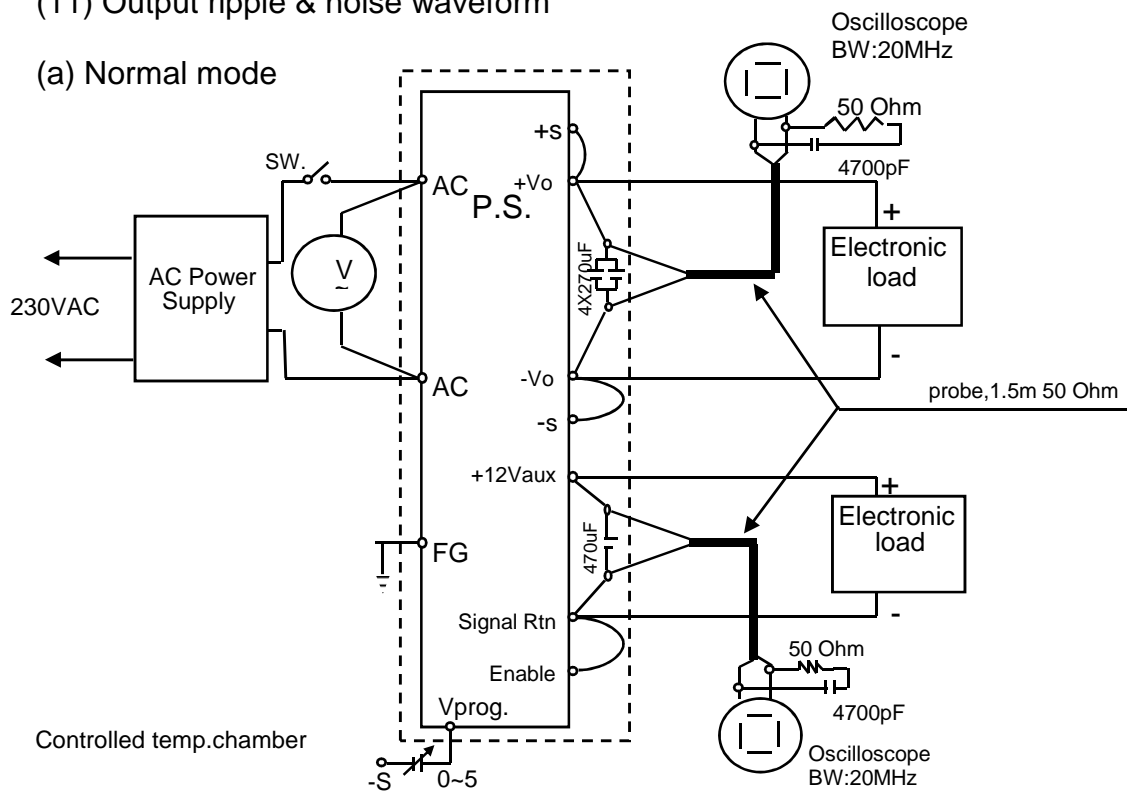

(b) Normal and common mode -Vo Terminal grounded

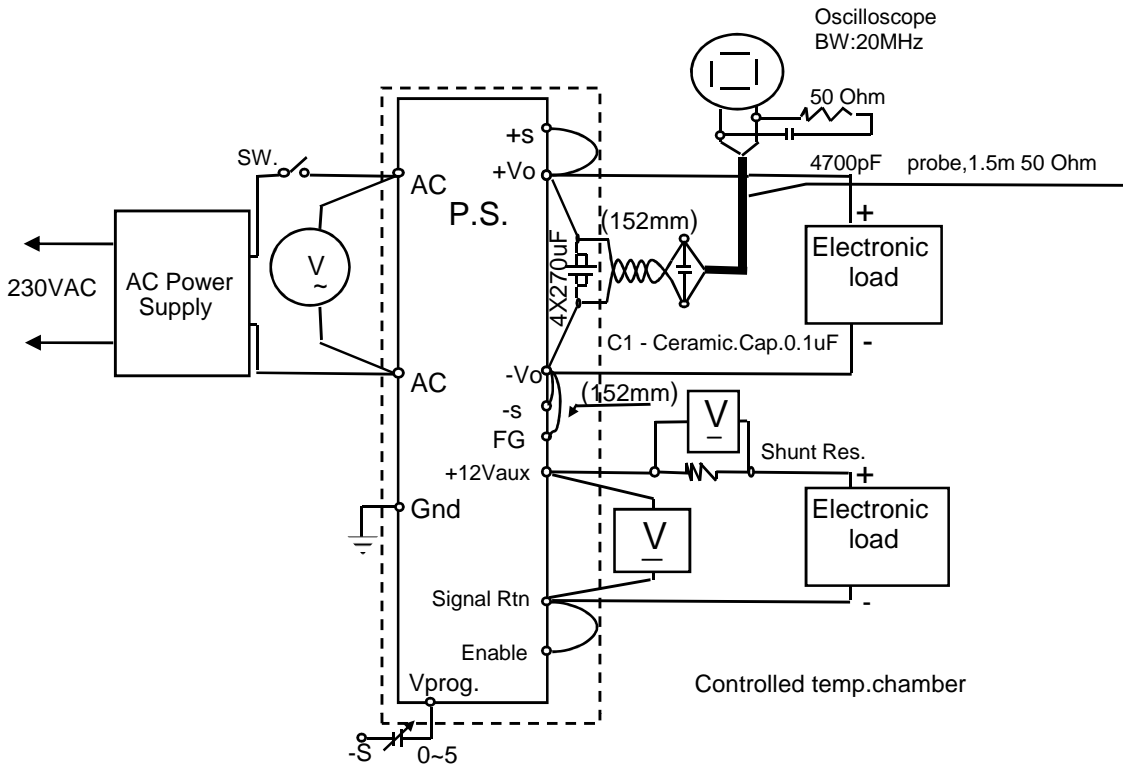

(c) Normal and common mode +Vo Terminal grounded

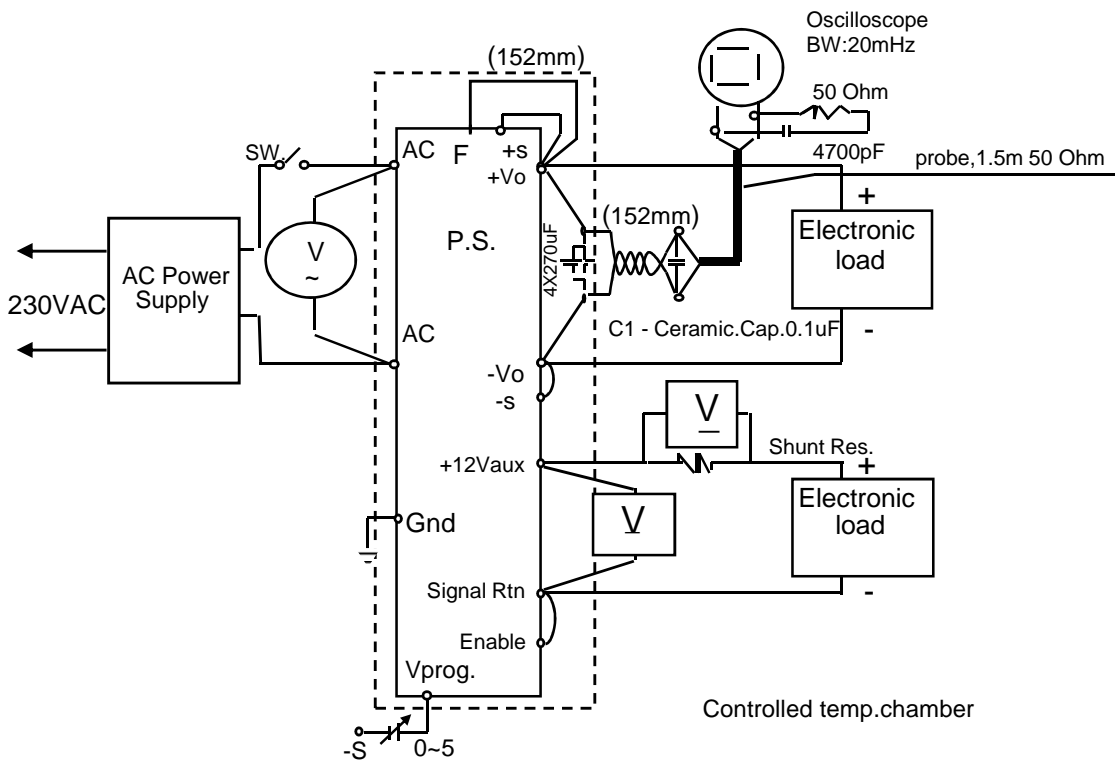

(12) Standby current  
Same as Steady state data



## 1.2 List of equipment used

	<b>EQUIPMENT USED</b>	<b>MANUFACTURER</b>	<b>MODEL NO.</b>
1	AC POWER SUPPLY	CHROMA	6463
2	AC POWER SUPPLY	CHROMA	6590
3	CONTROLLED TEMP. CHAMBER	THERMOTRON	SE-600-5-5
4	CONTROLLED TEMP. CHAMBER	THERMOTRON	SE-600-6-6
5	CONTROLLED TEMP. CHAMBER	THERMOTRON	SM-16-3800
6	CURRENT PROBE	YOKOGAWA	701933
7	CURRENT TRANSDUCER	DANFYSIK	ULTRASTAB 867
8	DIGITAL MULTI METER (DMM)	AGILENT	3401A
9	DIGITAL OSCILLOSCOPE	YOKOGAWA	DL1740E / DL1740EL
10	DIGITAL POWER METER	YOKOGAWA	WT110
11	ELECTRONIC LOAD	CHROMA	63203
12	ELECTRONIC LOAD	CHROMA	63204
13	ELECTRONIC LOAD	CHROMA	63206
14	ELECTRONIC LOAD	H & H	ZS7060
15	ELECTRONIC LOAD	H & H	ZS7006
16	LEAKAGE CURRENT TESTER	KIKUSUI	TOS3200

**2. Characteristics**

**2.1 Steady state data**

(1) Regulation - line and load, Temperature drift, Start-up voltage and Drop out voltage

**12V**

1. Regulation - line and load

Conditions

I<sub>AUX.</sub> : 0.5 A

T<sub>a</sub> : 25 °C

I <sub>out</sub> \ V <sub>in</sub>	85VAC	115VAC	132VAC	Line Regulation	
0%	12.001V	12.001V	12.001V	0mV	0.00%
50%	12.002V	12.002V	12.002V	0mV	0.00%
100%	12.002V	12.004V	12.004V	2mV	0.02%
Load	1mV	3mV	3mV		
Regulation	0.01%	0.03%	0.03%		

I <sub>out</sub> \ V <sub>in</sub>	170VAC	230VAC	265VAC	Line Regulation	
0%	12.001V	12.001V	12.001V	0mV	0.00%
50%	12.004V	12.004V	12.004V	0mV	0.00%
100%	11.999V	12.000V	12.000V	1mV	0.01%
Load	5mV	4mV	4mV		
Regulation	0.04%	0.03%	0.03%		

\* Note: Load at 85VAC is derated according to specification

2. Temperature drift

Conditions

V<sub>in</sub> : 230 VAC

I<sub>out</sub> : 100 %

I<sub>AUX.</sub> : 0.5 A

T <sub>a</sub>	-10°C	25°C	50°C	Temp. Stability		
V <sub>out</sub>	11.997V	12.012V	12.006V	0.015V	0.13%	15.63ppm

(1) Regulation - line and load, Temperature drift, Start-up voltage and Drop out voltage

**24V**

1. Regulation - line and load

Conditions  $I_{AUX} : 0.5 \text{ A}$   
 $T_a : 25 \text{ }^\circ\text{C}$

$I_{out} \setminus V_{in}$	85VAC	115VAC	132VAC	Line Regulation	
0%	24.000V	24.000V	24.000V	0mV	0.00%
50%	24.007V	24.008V	24.008V	1mV	0.00%
100%	24.006V	24.004V	24.004V	2mV	0.01%
Load Regulation	7mV	8mV	8mV		
	0.03%	0.03%	0.03%		

$I_{out} \setminus V_{in}$	170VAC	230VAC	265VAC	Line Regulation	
0%	24.002V	24.002V	24.003V	1mV	0.00%
50%	24.002V	24.003V	24.003V	1mV	0.00%
100%	23.999V	23.999V	23.999V	0mV	0.00%
Load Regulation	3mV	4mV	4mV		
	0.01%	0.02%	0.02%		

\* Note: Load at 85VAC is derated according to specification

2. Temperature drift

Conditions  $V_{in} : 230 \text{ VAC}$   
 $I_{out} : 100 \%$   
 $I_{AUX} : 0.5 \text{ A}$

$T_a$	-10°C	25°C	50°C	Temp. Stability		
$V_{out}$	24.010V	23.975V	23.901V	0.109V	0.45%	57ppm

(1) Regulation - line and load, Temperature drift, Start-up voltage and Drop out voltage

**48V**

1. Regulation - line and load

Conditions  $I_{AUX} : 0.5 \text{ A}$   
 $T_a : 25 \text{ }^\circ\text{C}$

$I_{out} \setminus V_{in}$	85VAC	115VAC	132VAC	Line Regulation	
0%	48.013V	48.013V	48.013V	0mV	0.00%
50%	48.020V	48.017V	48.017V	3mV	0.01%
100%	48.009V	48.005V	48.005V	4mV	0.01%
Load Regulation	11mV	12mV	12mV		
	0.02%	0.03%	0.03%		

$I_{out} \setminus V_{in}$	170VAC	230VAC	265VAC	Line Regulation	
0%	48.013V	48.013V	48.013V	0mV	0.00%
50%	48.011V	48.011V	48.011V	0mV	0.00%
100%	47.986V	47.985V	47.985V	1mV	0.00%
Load Regulation	27mV	28mV	28mV		
	0.06%	0.06%	0.06%		

\* Note: Load at 85VAC is derated according to specification

2. Temperature drift

Conditions  $V_{in} : 230 \text{ VAC}$   
 $I_{out} : 100 \%$   
 $I_{AUX} : 0.5 \text{ A}$


$T_a$	-10°C	25°C	50°C	Temp. Stability		
$V_{out}$	47.918V	47.953V	47.876V	0.077V	0.16%	20ppm

2.1 Steady state data


(2) Output voltage and Ripple noise voltage vs. Input voltage

Conditions Iout : 100 %  
 Ta : -10 °C -----  
 : 25 °C - - - - -  
 : 50 °C \_\_\_\_\_


12V

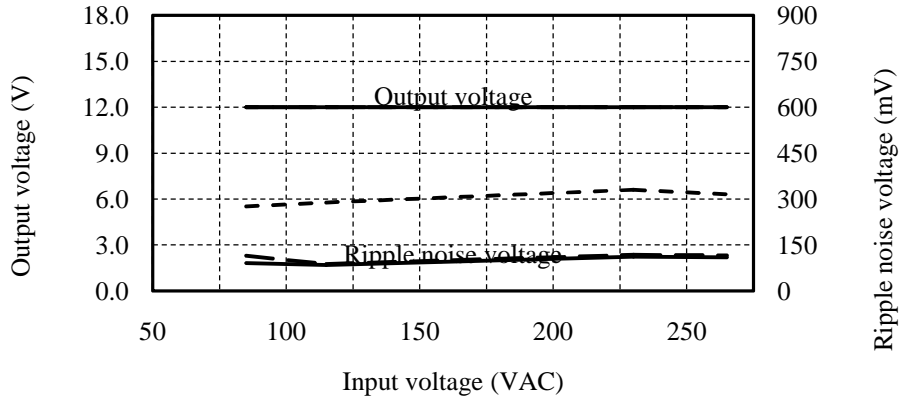

24V

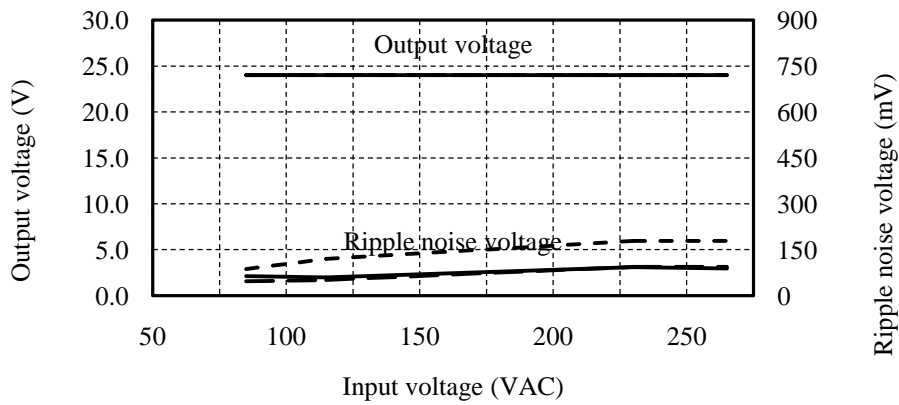

48V

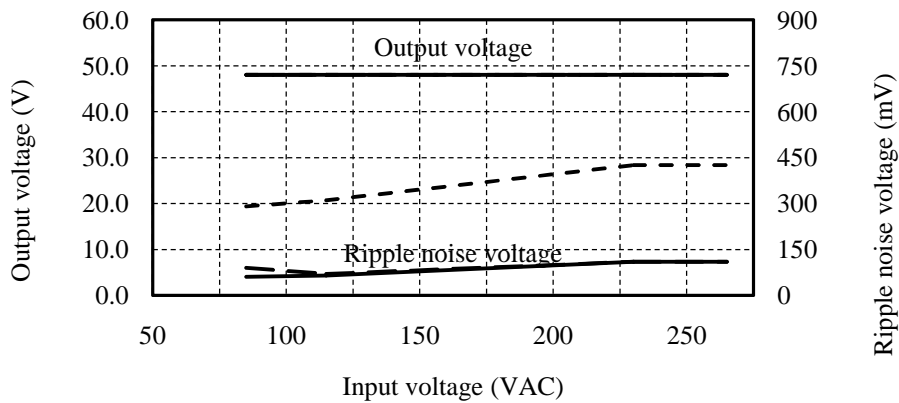


2.1 Steady state data


(3) Efficiency and Input current vs. Output current

Conditions Vin : 85 VAC ———  
 : 115 VAC - - - - -  
 : 230 VAC - · - · - ·  
 : 265 VAC ·······  
 Ta : 25 °C


12V

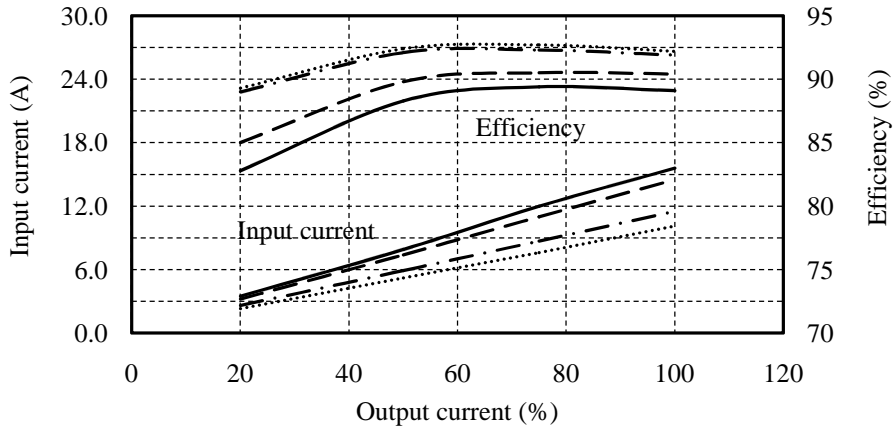

24V

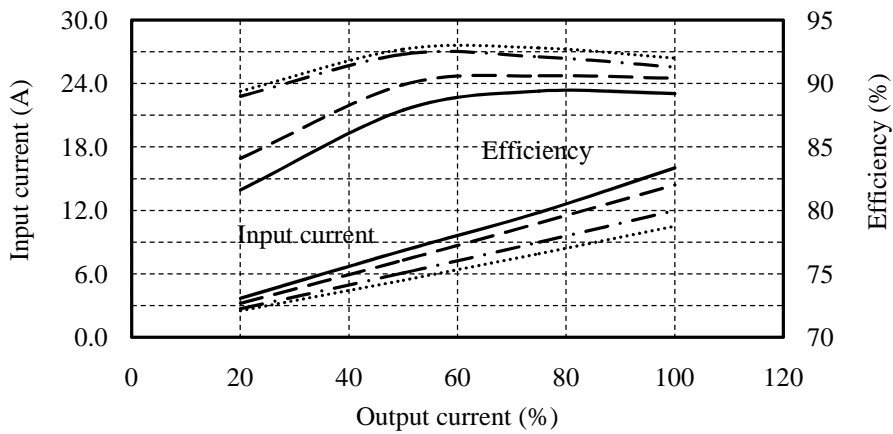


48V

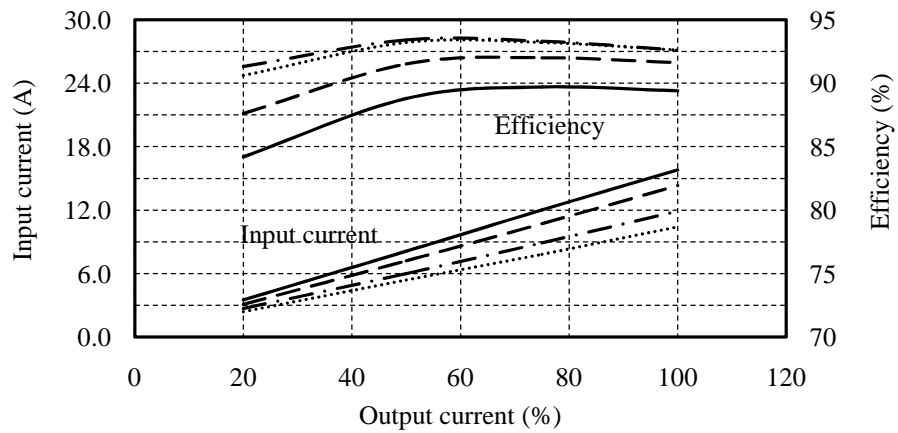


2.2 Warm up voltage drift characteristics

Conditions Vin : 230 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

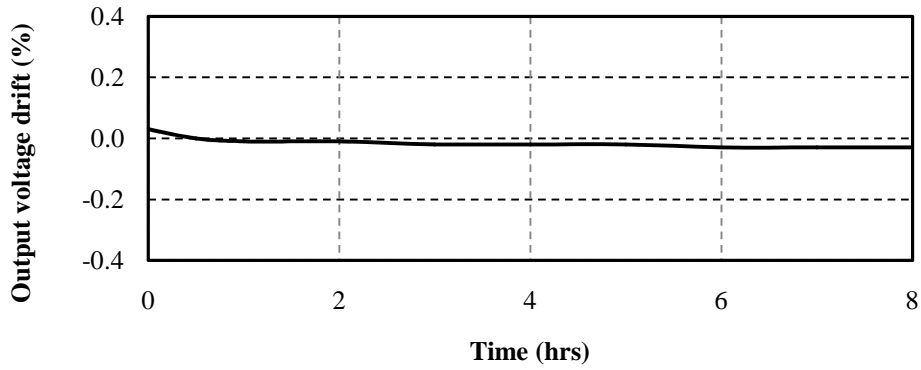

24V

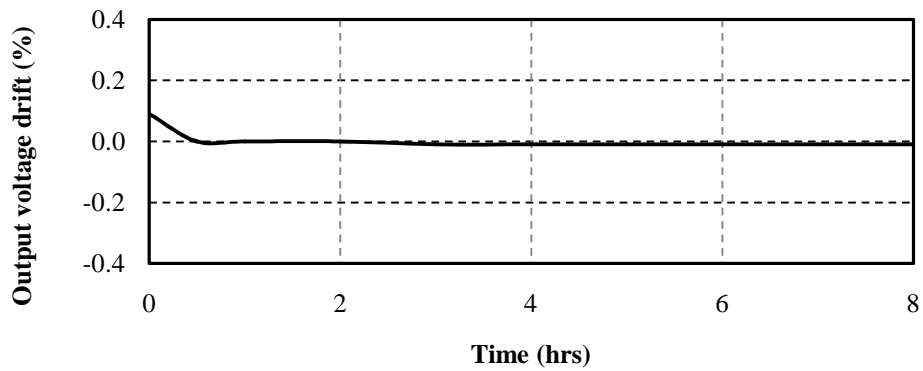


48V

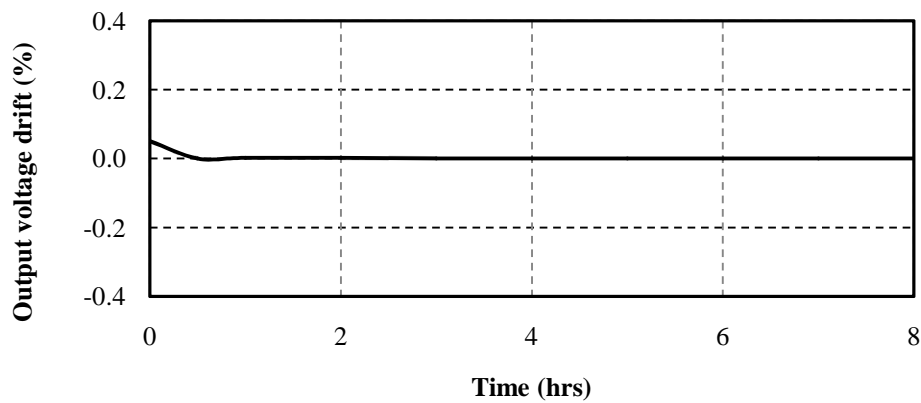


2.3 Over voltage protection (OVP) characteristics

Conditions Vin : 230 VAC  
 Iout : 0 %  
 Ta : 25 °C


12V

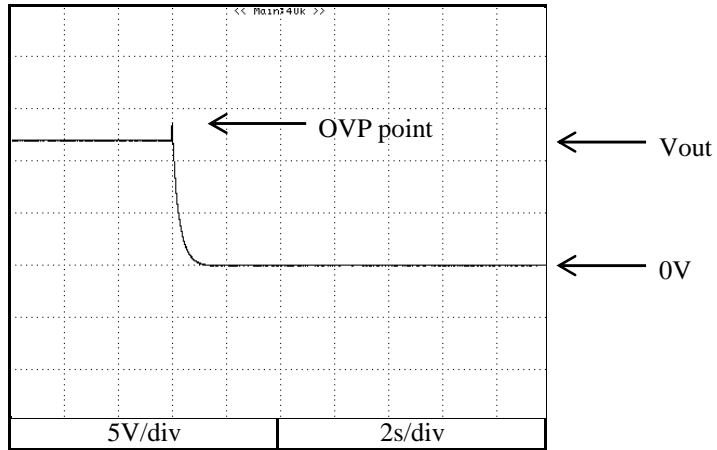

24V

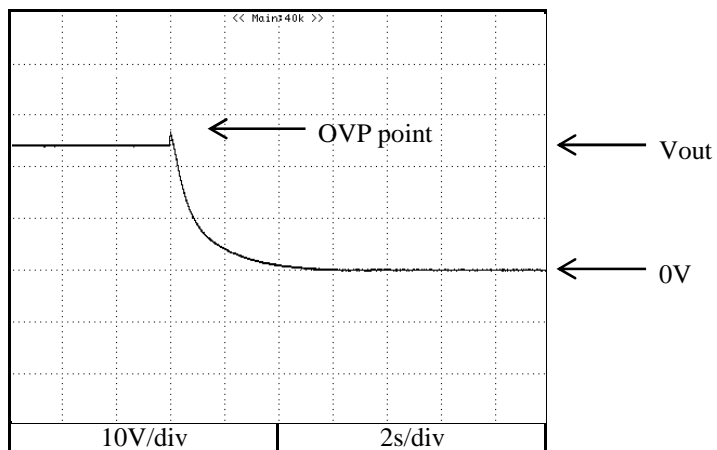

48V

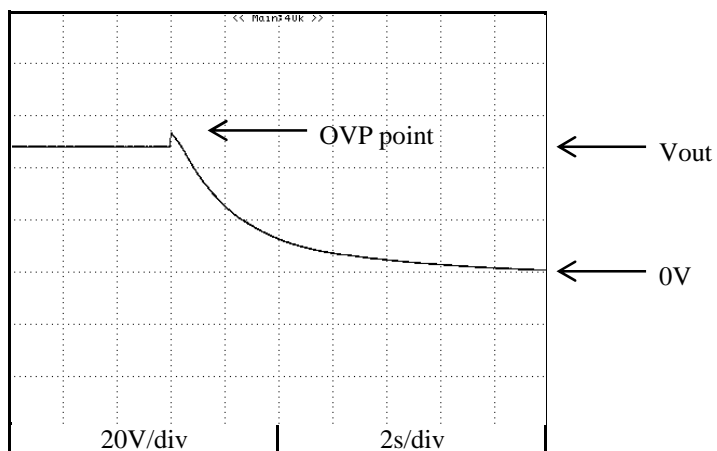





2.4 Over current protection (OCP) characteristics

Conditions Vin : 85 VAC -----  
 : 115 VAC -.-.-.-  
 : 230 VAC ————  
 Ta : 25 °C


12V

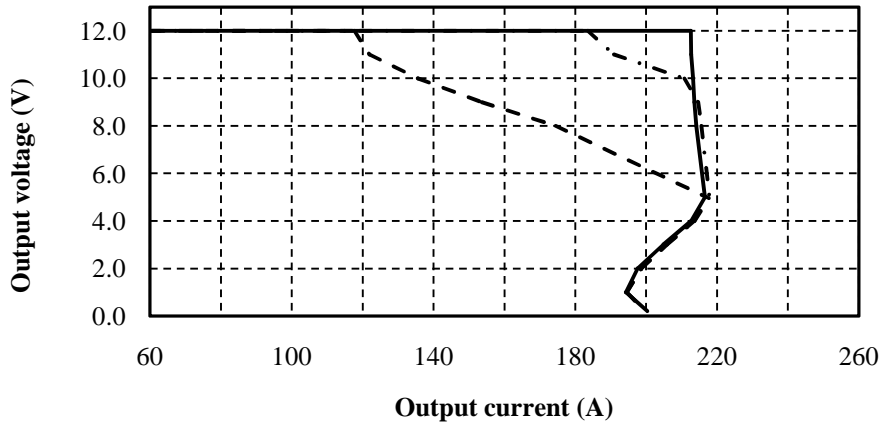

24V

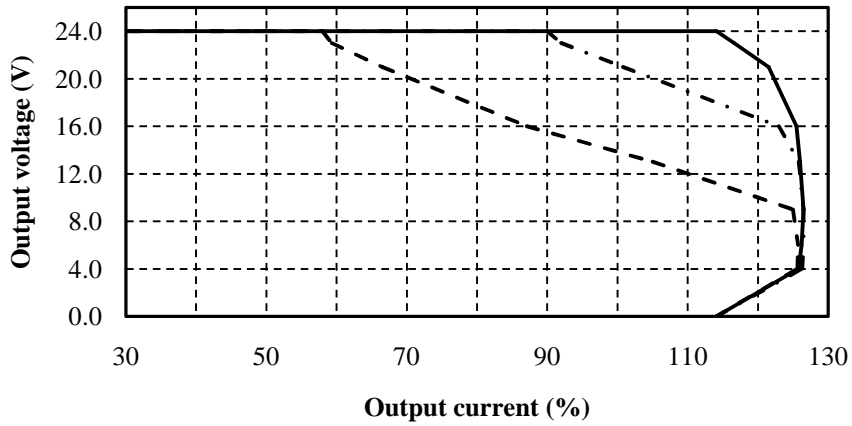


48V

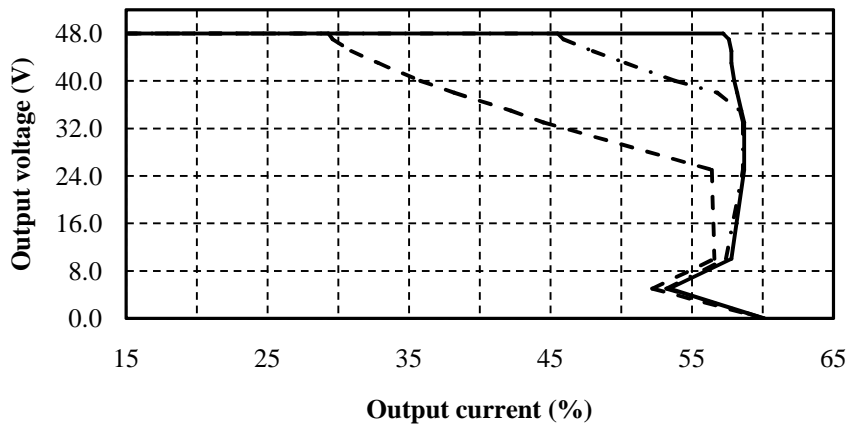


2.5 Output rise characteristics

Conditions Vin : 85 VAC (A)  
 : 115 VAC (B)  
 : 230 VAC (C)  
 : 265 VAC (D)  
 Iout : 0 %  
 Ta : 25 °C


12V

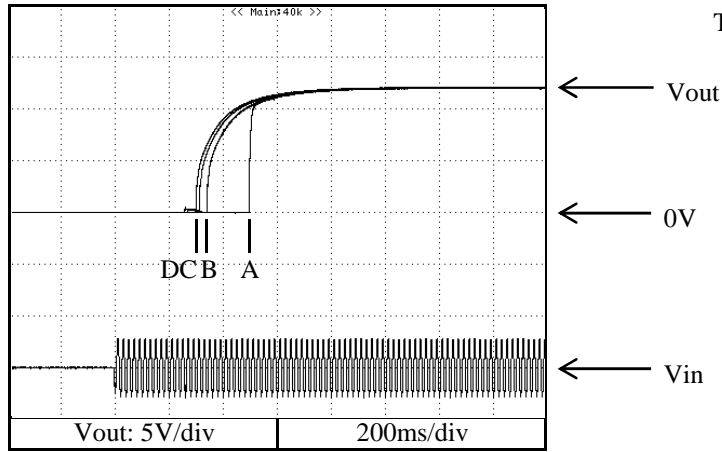

24V

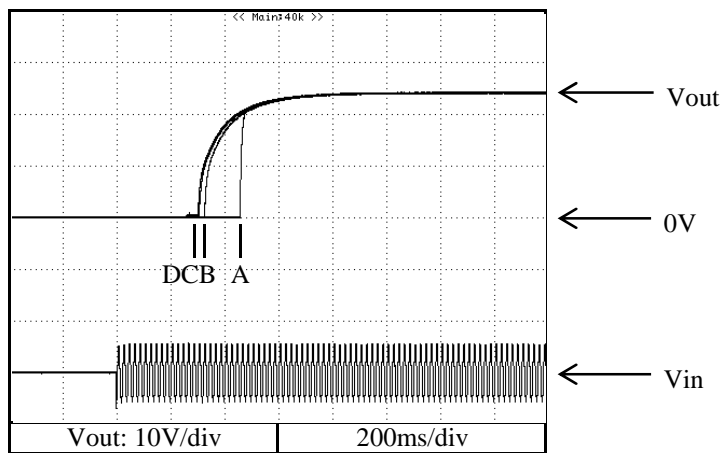


48V

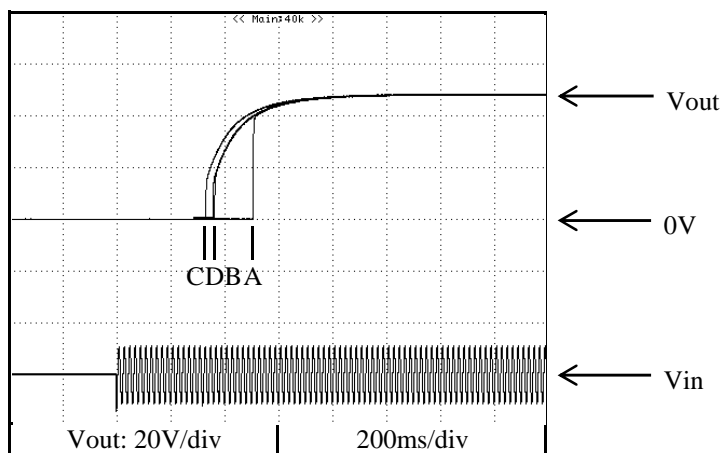


2.5 Output rise characteristics

Conditions Vin : 85 VAC (A)  
 : 115 VAC (B)  
 : 230 VAC (C)  
 : 265 VAC (D)  
 Iout : 100 %  
 Ta : 25 °C


12V

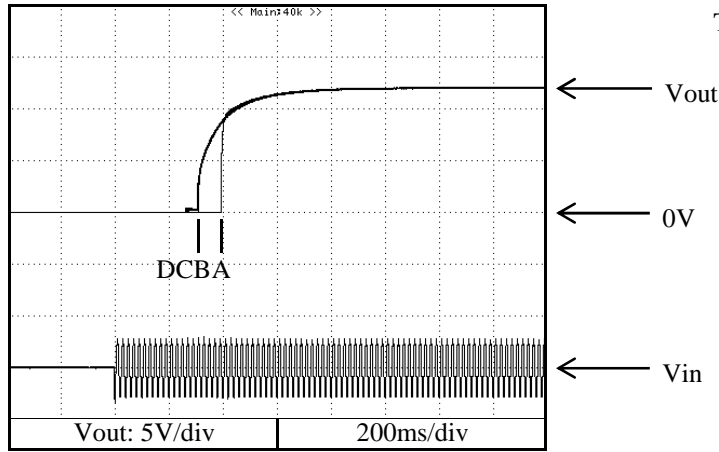

24V

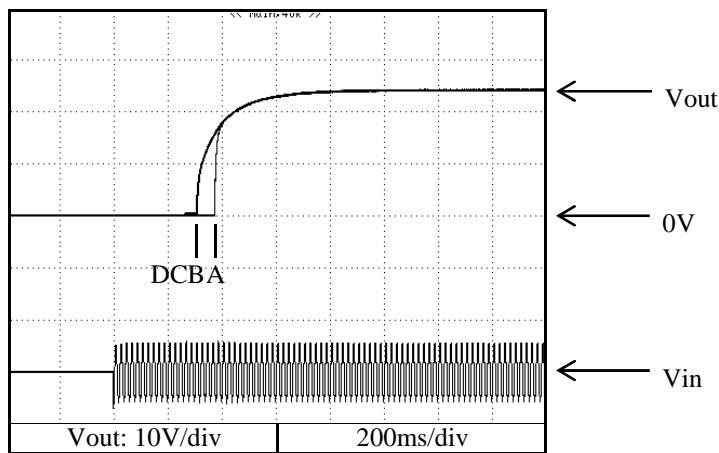


48V

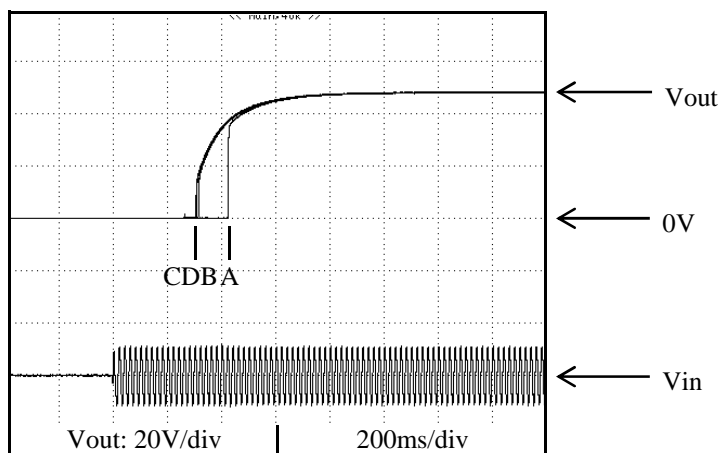


2.6 Output fall characteristics

Conditions Vin : 85 VAC (A)  
 : 115 VAC (B)  
 : 230 VAC (C)  
 : 265 VAC (D)  
 Iout : 0 %  
 Ta : 25 °C


12V

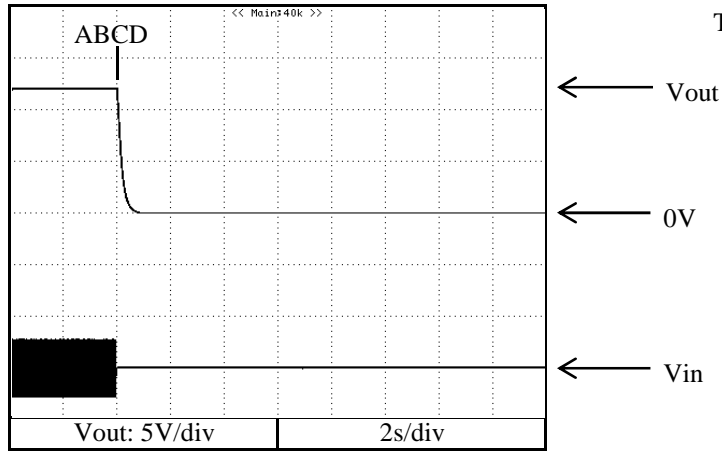

24V

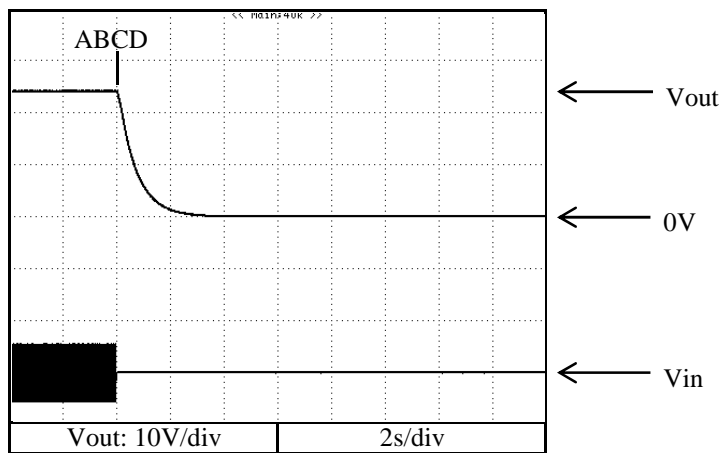


48V

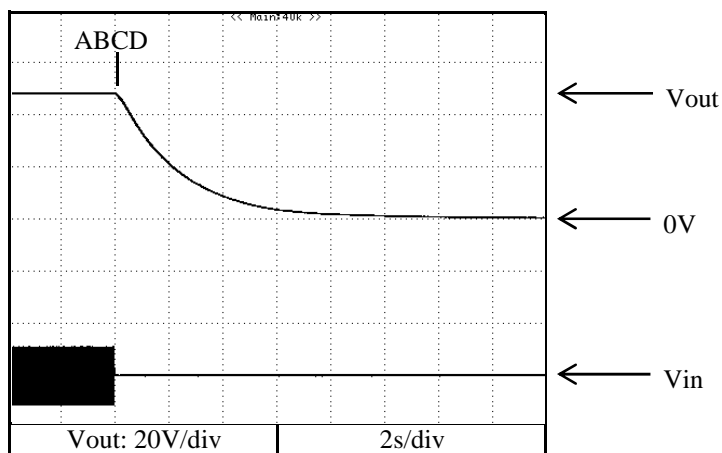


2.6 Output fall characteristics

Conditions Vin : 85 VAC (A)  
 : 115 VAC (B)  
 : 230 VAC (C)  
 : 265 VAC (D)  
 Iout : 100 %  
 Ta : 25 °C


12V

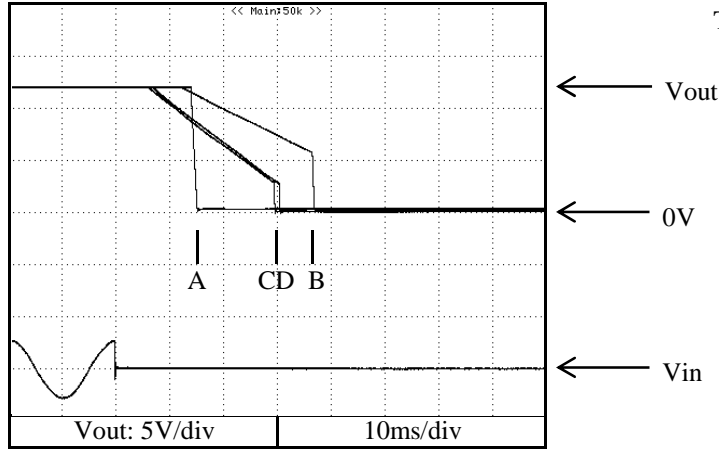

24V

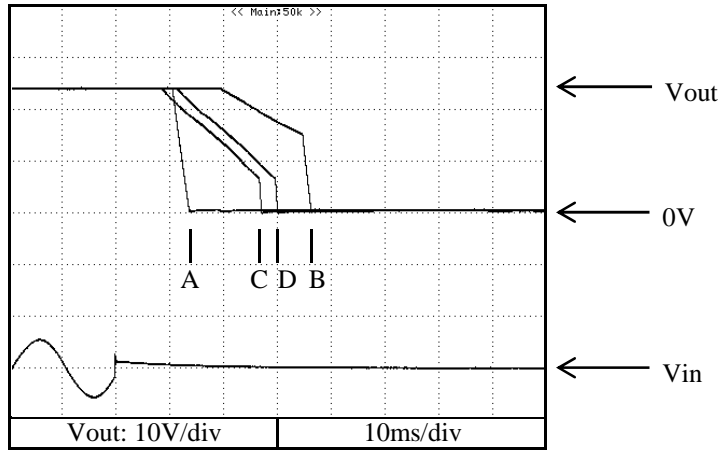


48V

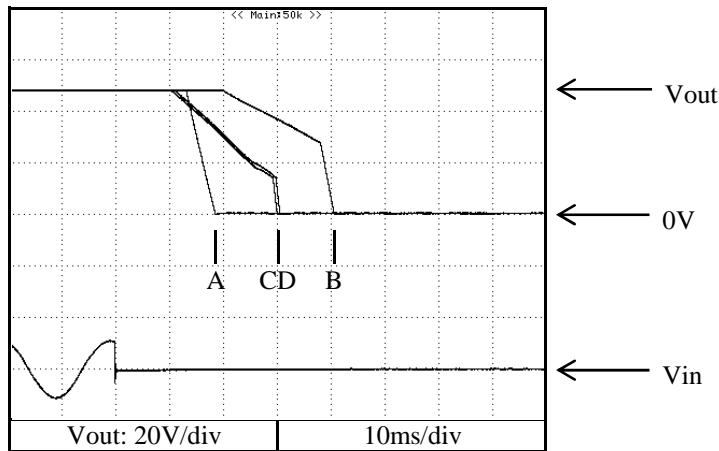


2.7 Output rise characteristics with ON/OFF CONTROL

Conditions Vin : 115 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

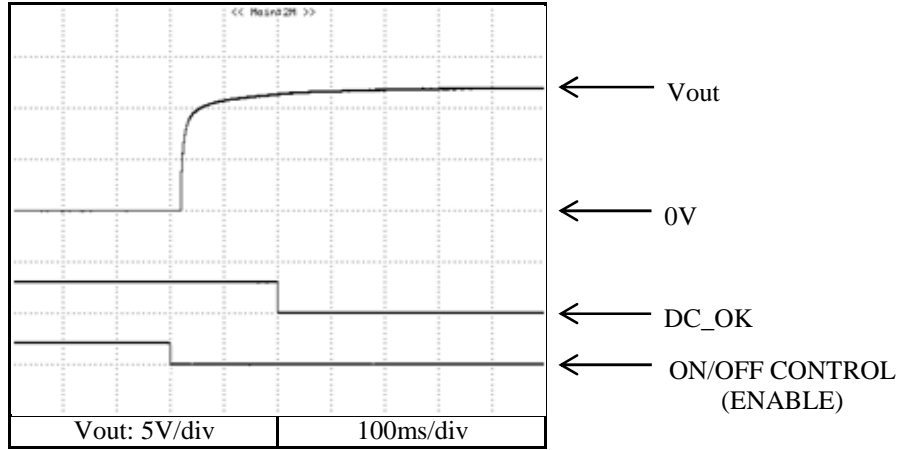

24V

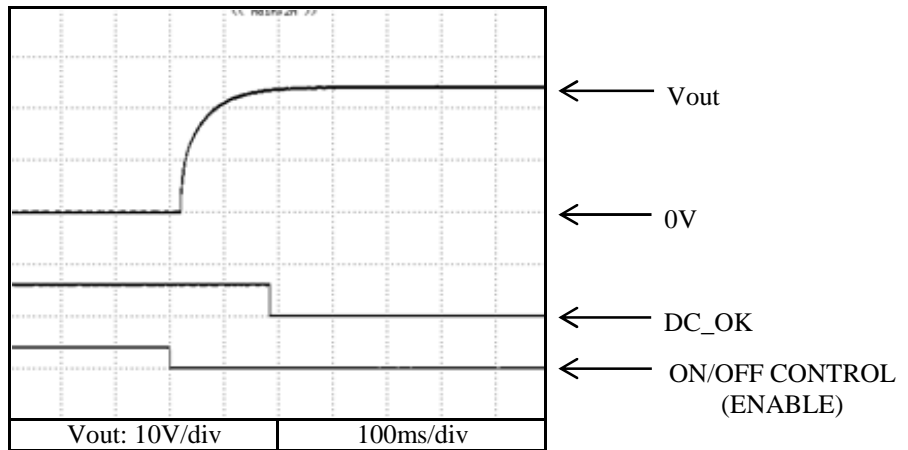


48V

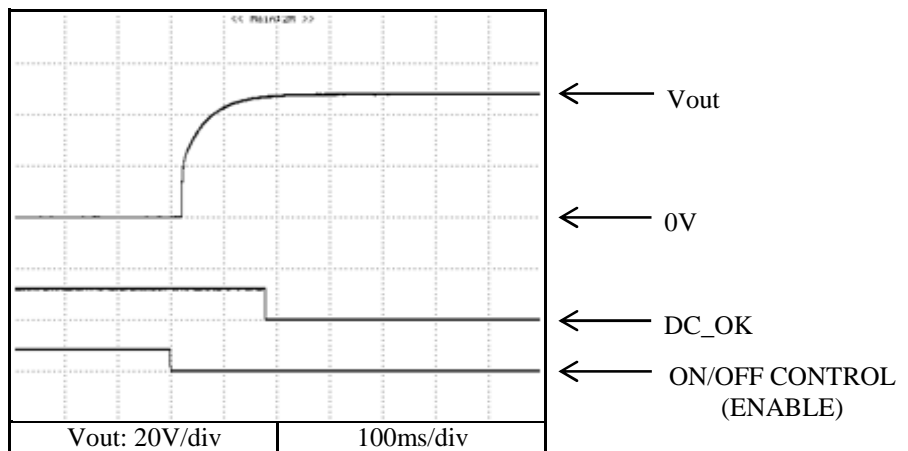


2.7 Output rise characteristics with ON/OFF CONTROL

Conditions Vin : 230 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

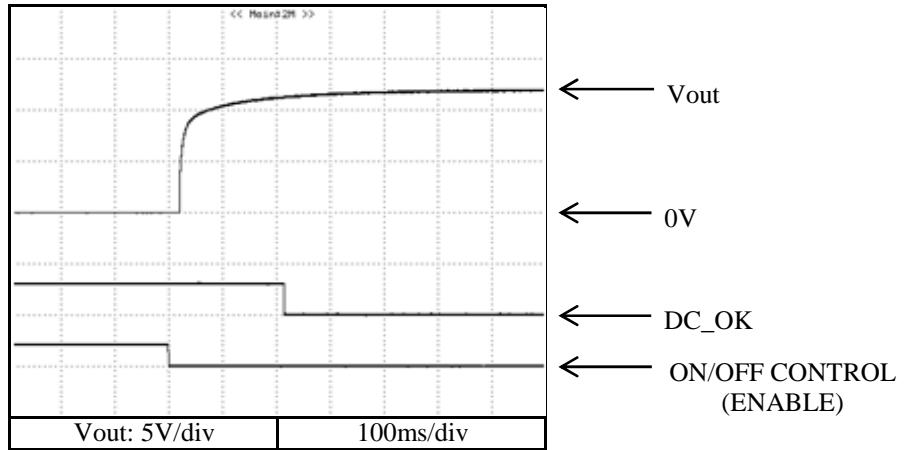

24V

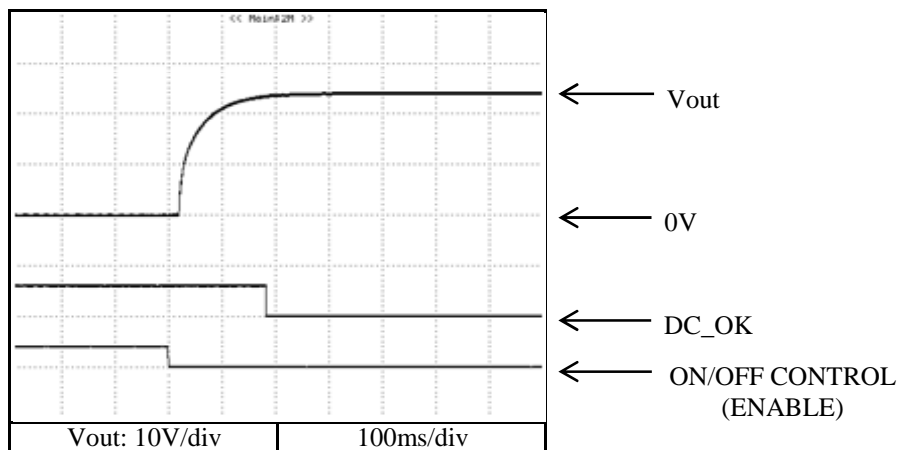


48V

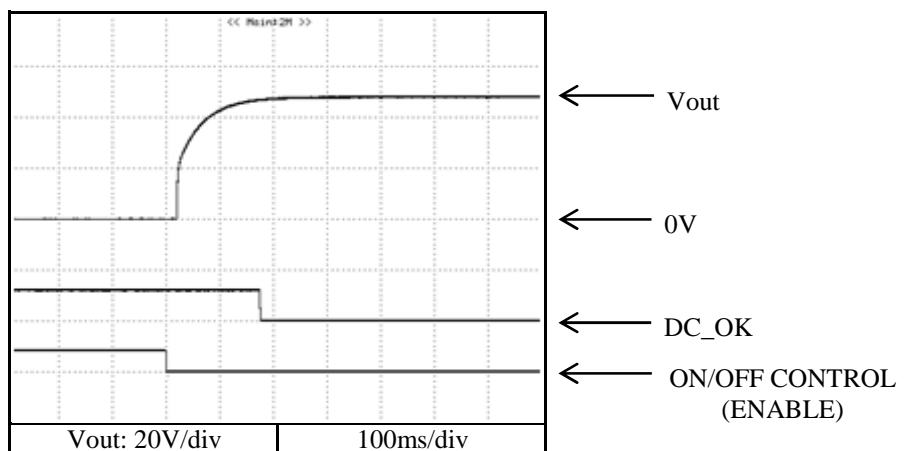


2.8 Output fall characteristics with ON/OFF CONTROL

Conditions Vin : 115 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

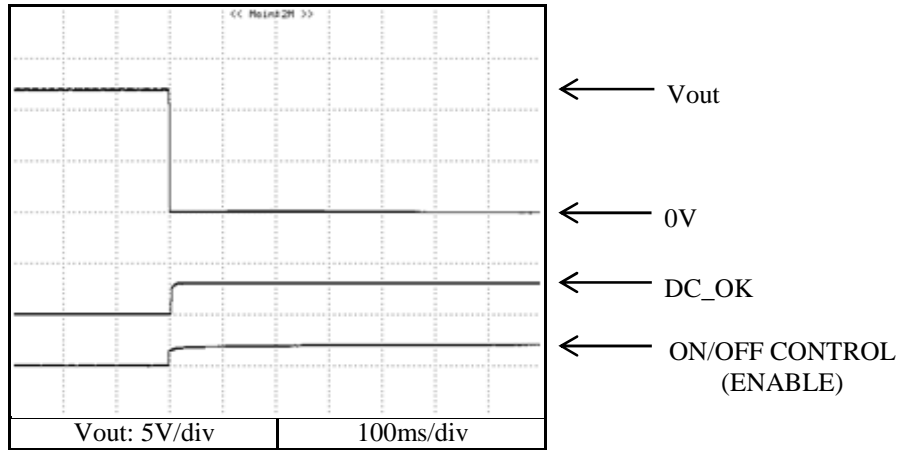

24V

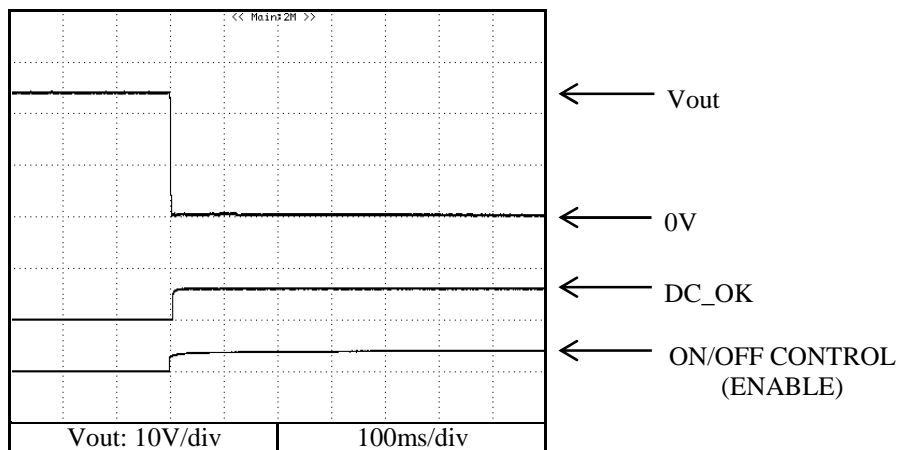

48V

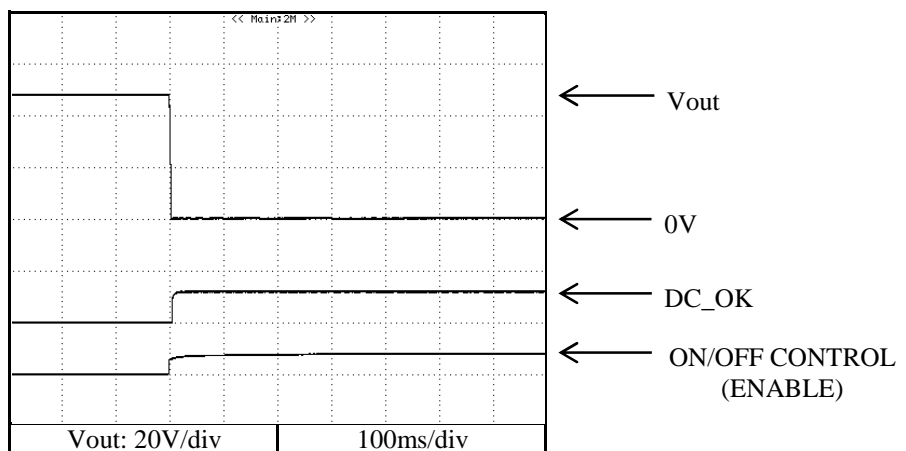





2.8 Output fall characteristics with ON/OFF CONTROL

Conditions Vin : 230 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

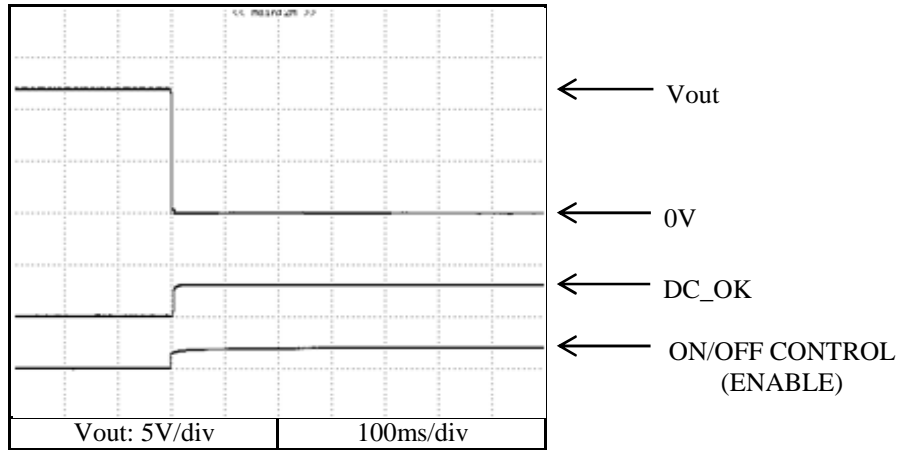

24V

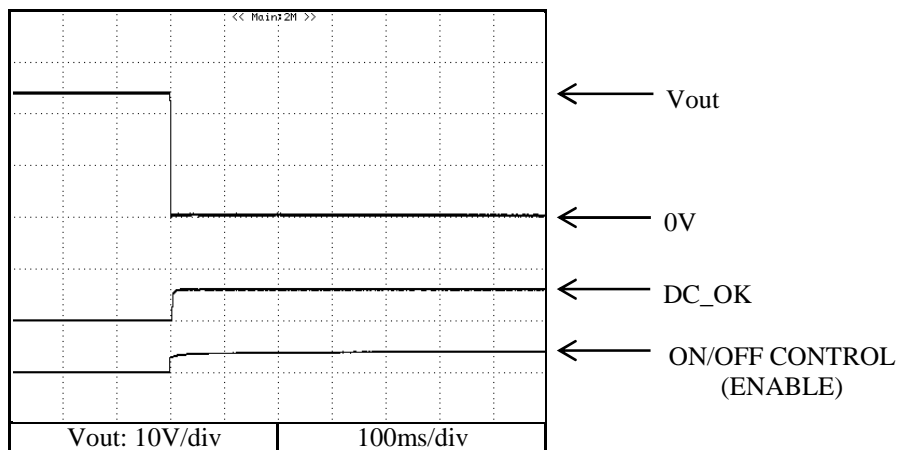


48V

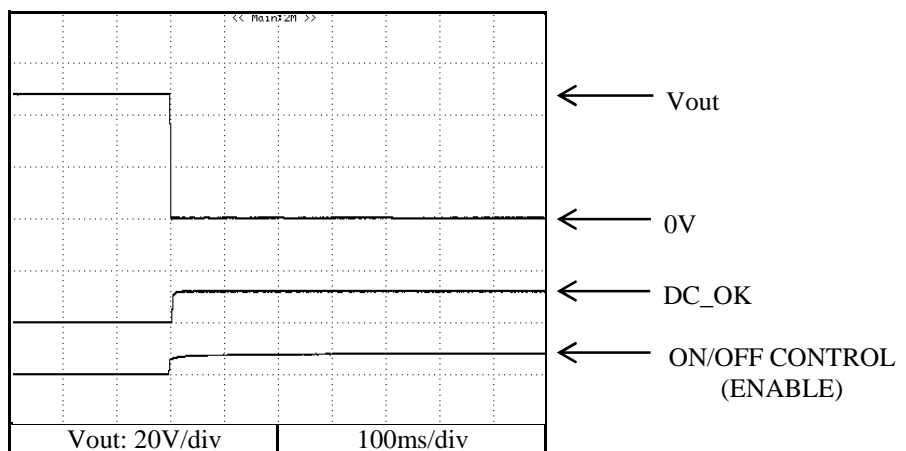


2.9 Hold up time characteristics

Conditions Vin : 115 VAC -----  
 : 230 VAC ————  
 Ta : 25 °C


12V

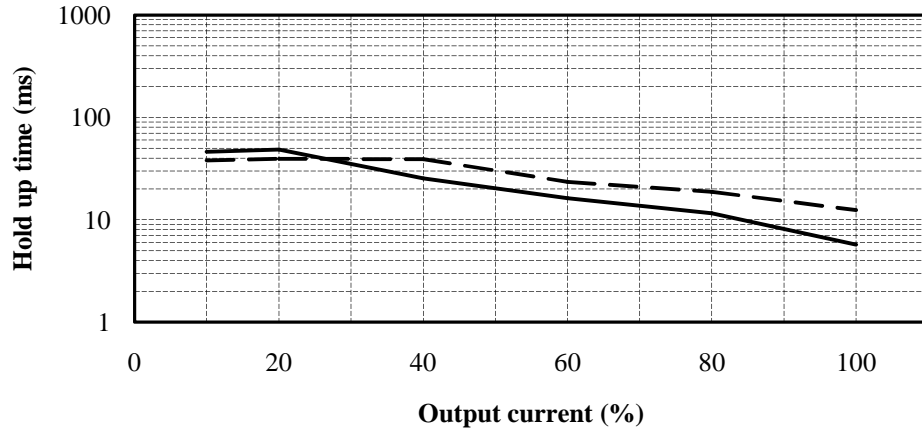

24V

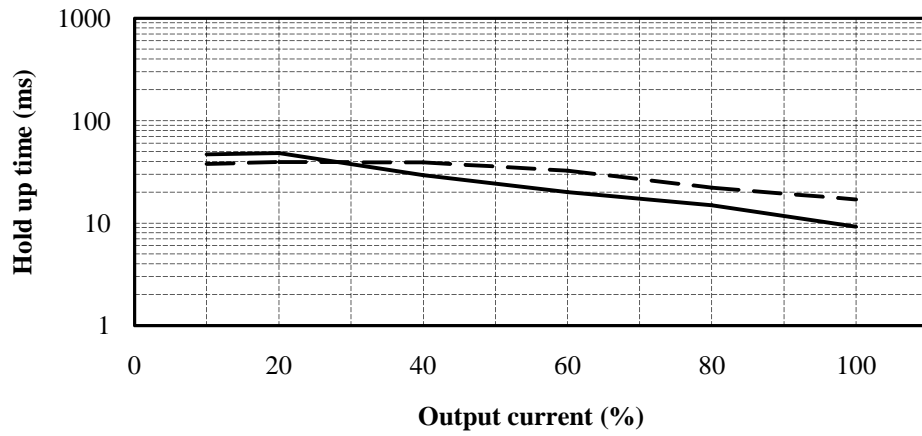


48V

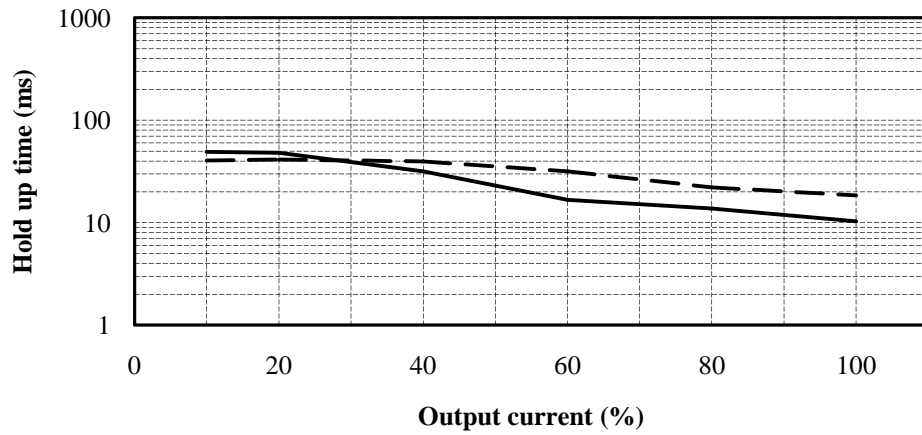


2.10 Dynamic line response characteristics

Conditions Vin : 85 VAC ↔ 132 VAC (A)  
 : 170 VAC ↔ 265 VAC (B)  
 Iout : 100 %  
 Ta : 25 °C


12V

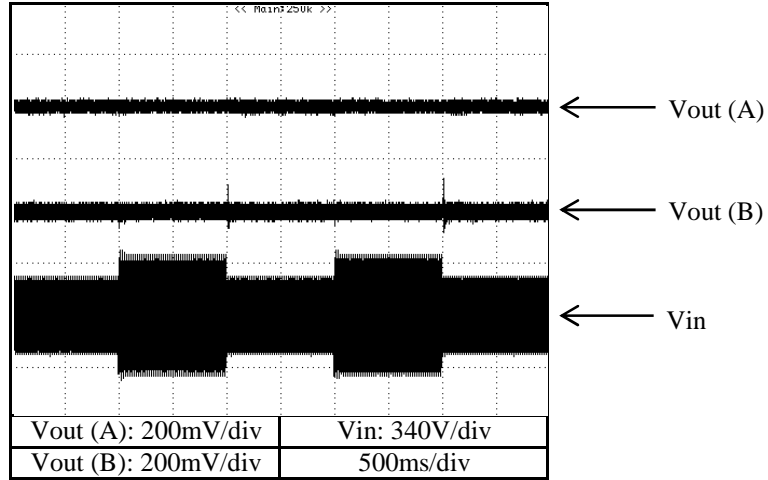

24V

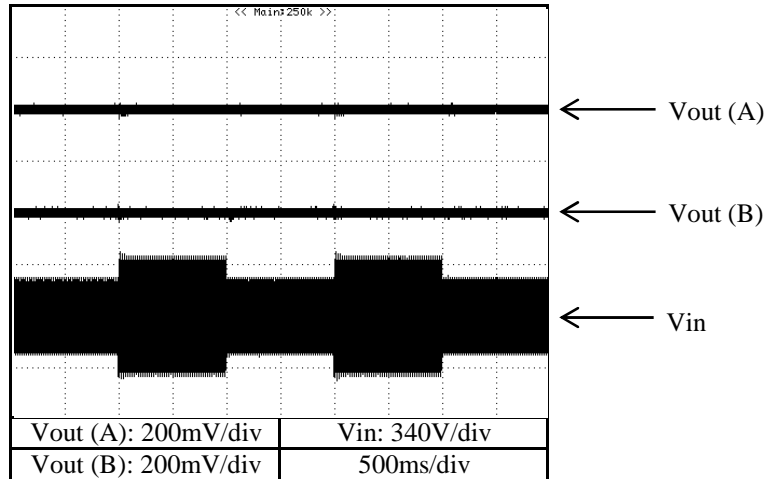

48V


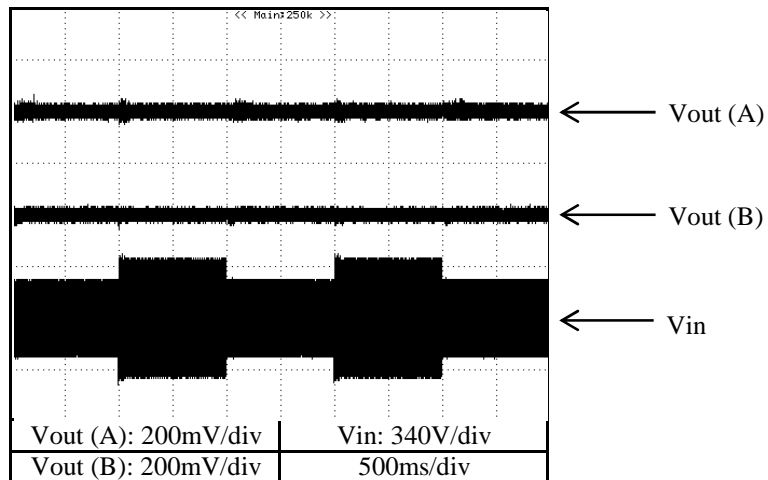


2.11 Dynamic load response characteristics



Conditions Vin : 230 VAC  
Ta : 25 °C

12V

f=100Hz

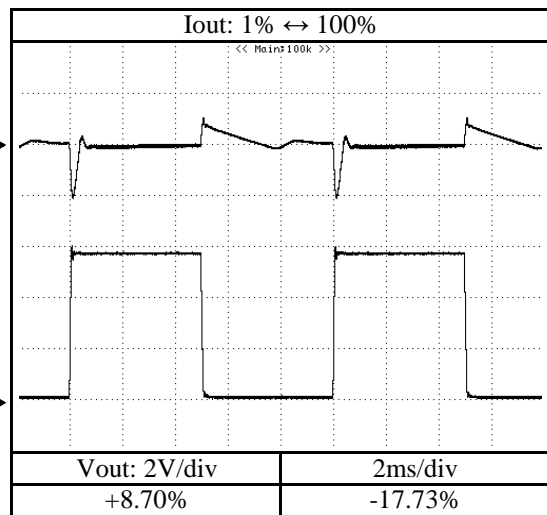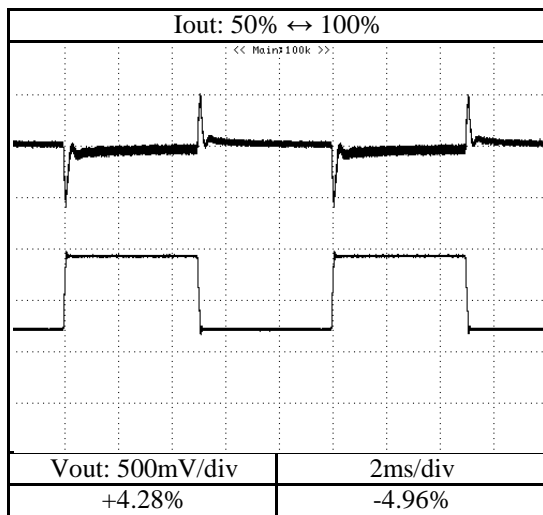

f=1kHz

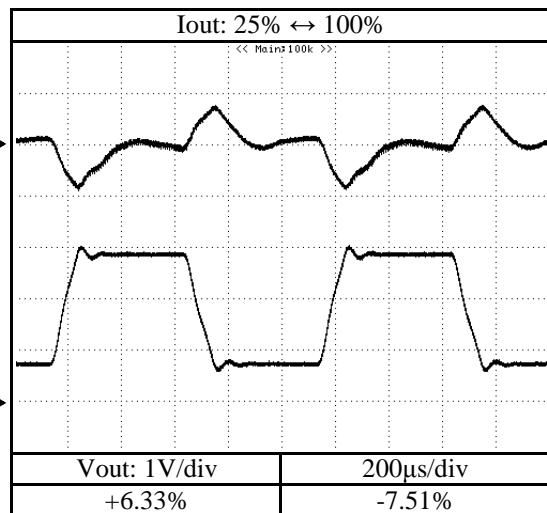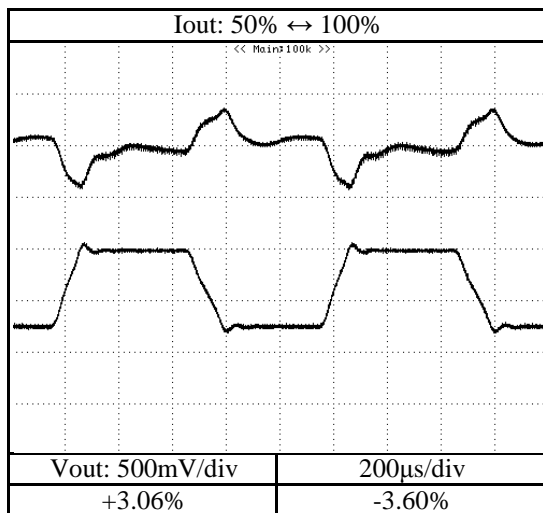


2.11 Dynamic load response characteristics


Conditions Vin : 230 VAC  
Ta : 25 °C

24V

f=100Hz

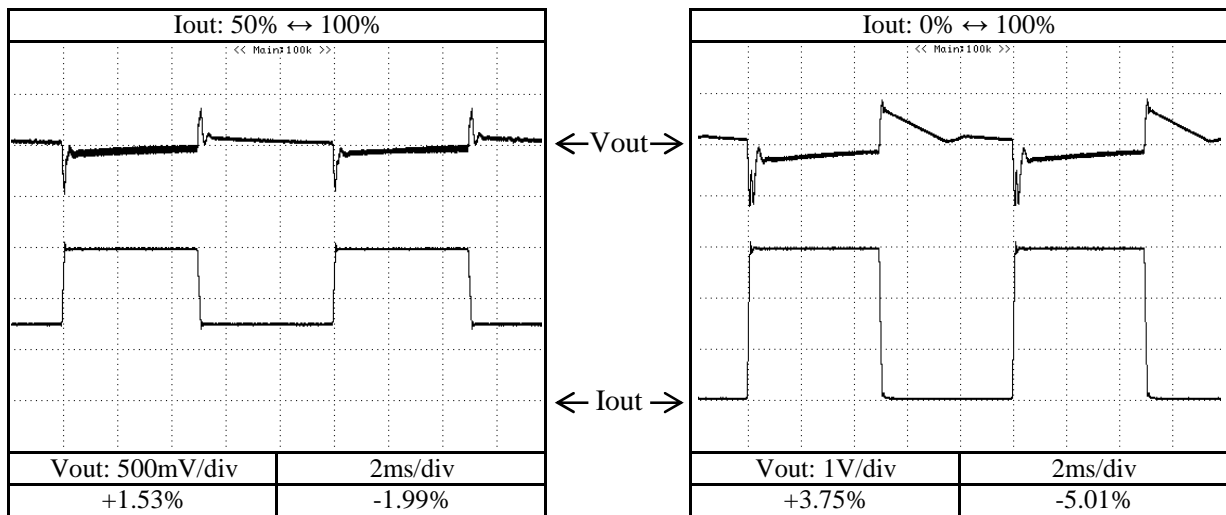

f=1kHz

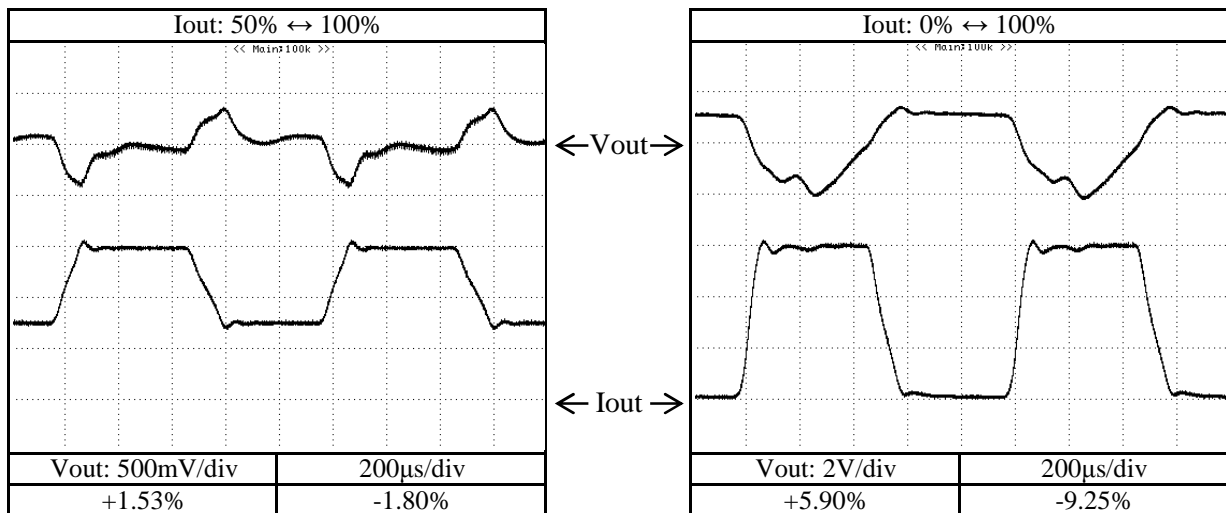


2.11 Dynamic load response characteristics


Conditions Vin : 230 VAC  
Ta : 25 °C

48V

$f=100\text{Hz}$

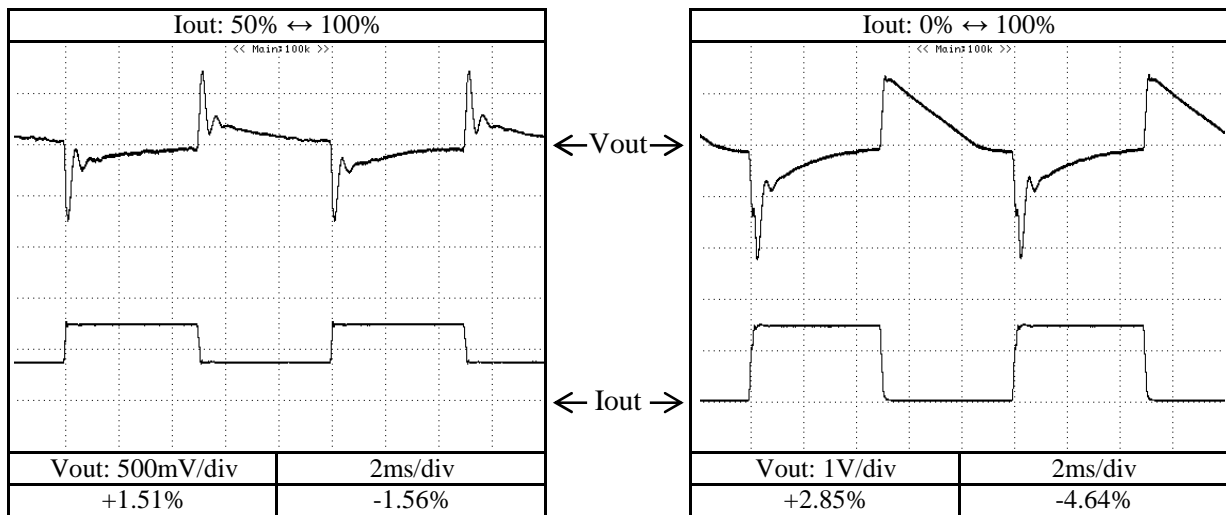

$f=1\text{kHz}$

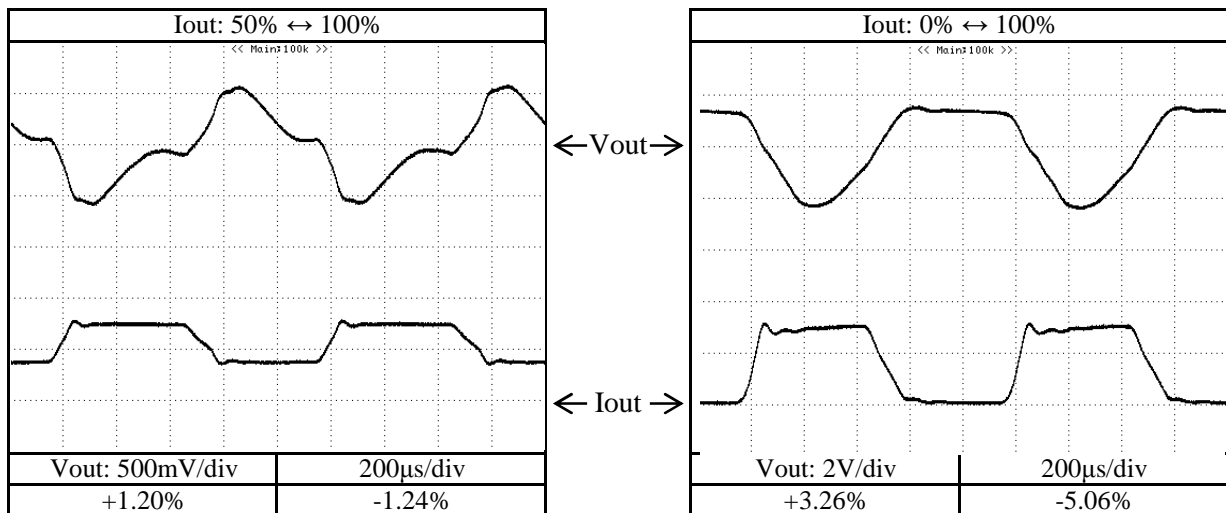


2.12 Response to brown out characteristics

Conditions Vin : 115 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

A = 14ms  
 B = 31ms  
 C = 32ms

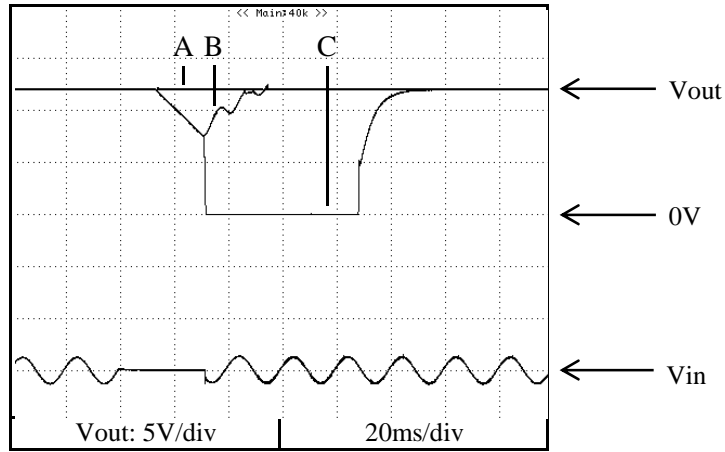


24V

A = 16ms  
 B = 35ms  
 C = 36ms

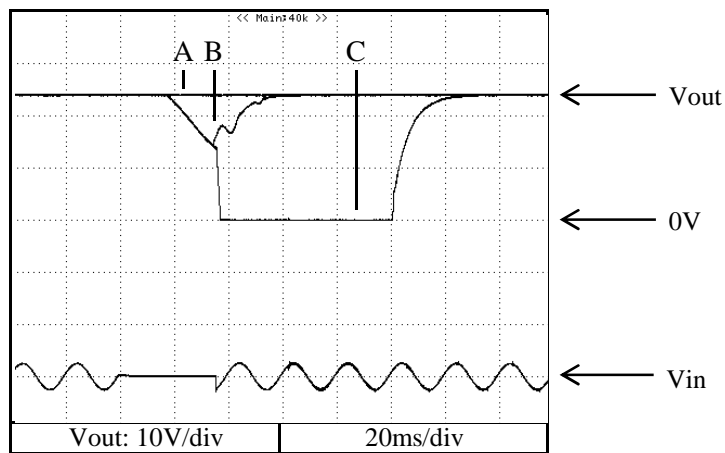

48V

A = 16ms  
 B = 37ms  
 C = 38ms

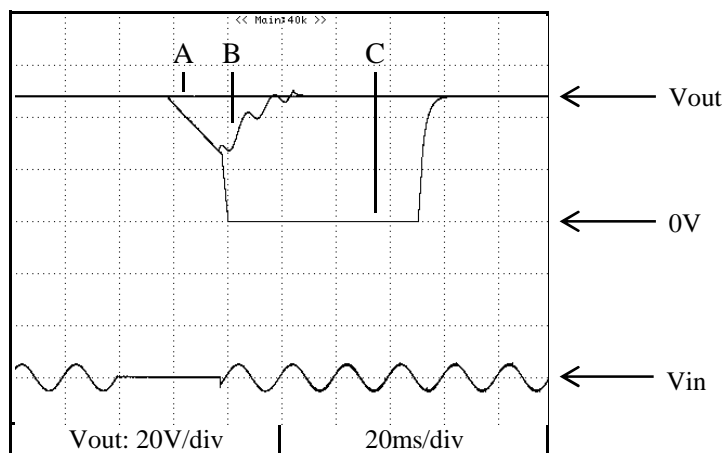


2.12 Response to brown out characteristics

Conditions Vin : 230 VAC  
 Iout : 100 %  
 Ta : 25 °C


12V

A = 6ms  
 B = 28ms  
 C = 29ms

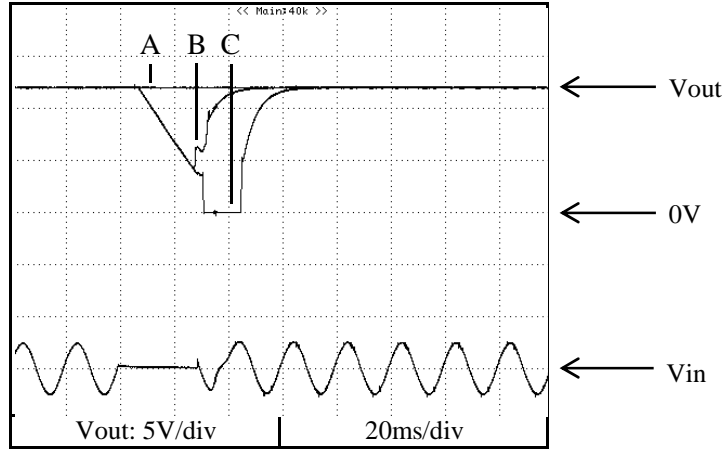


24V

A = 8ms  
 B = 26ms  
 C = 27ms

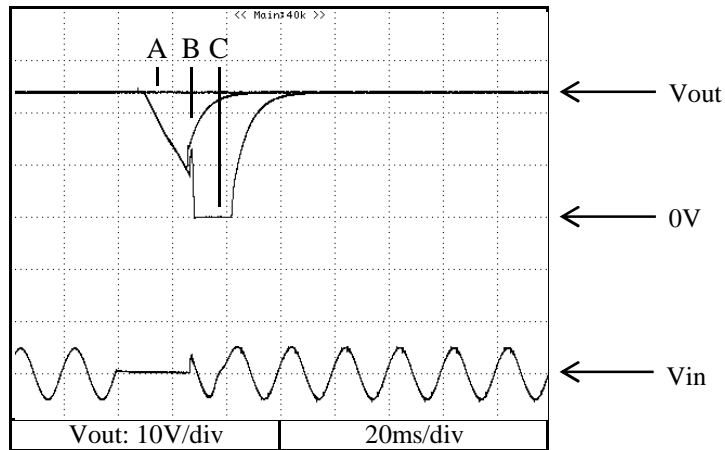

48V

A = 8ms  
 B = 27ms  
 C = 28ms

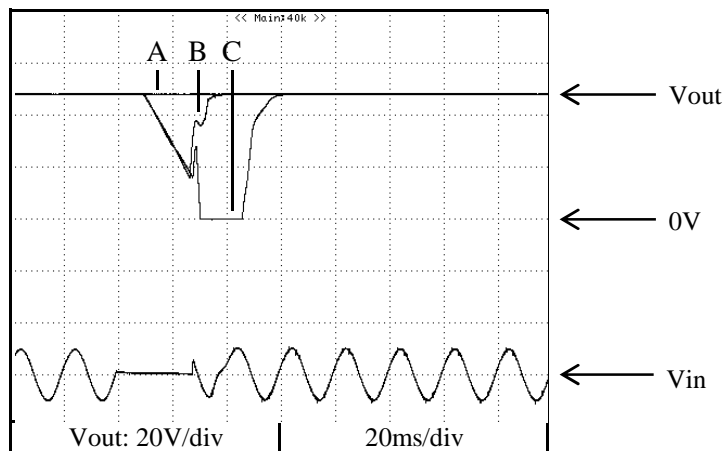




2.13 Inrush current characteristics

Conditions Iout : 115V - - - -  
 230V ————


Ta : 25 °C

12V

Iout = 0%

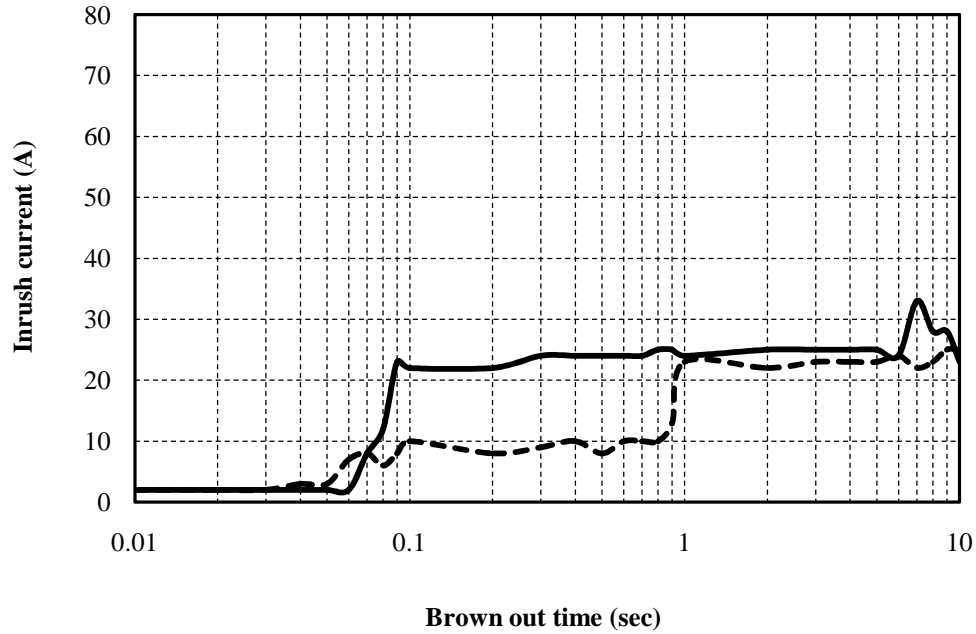

Iout = 100%

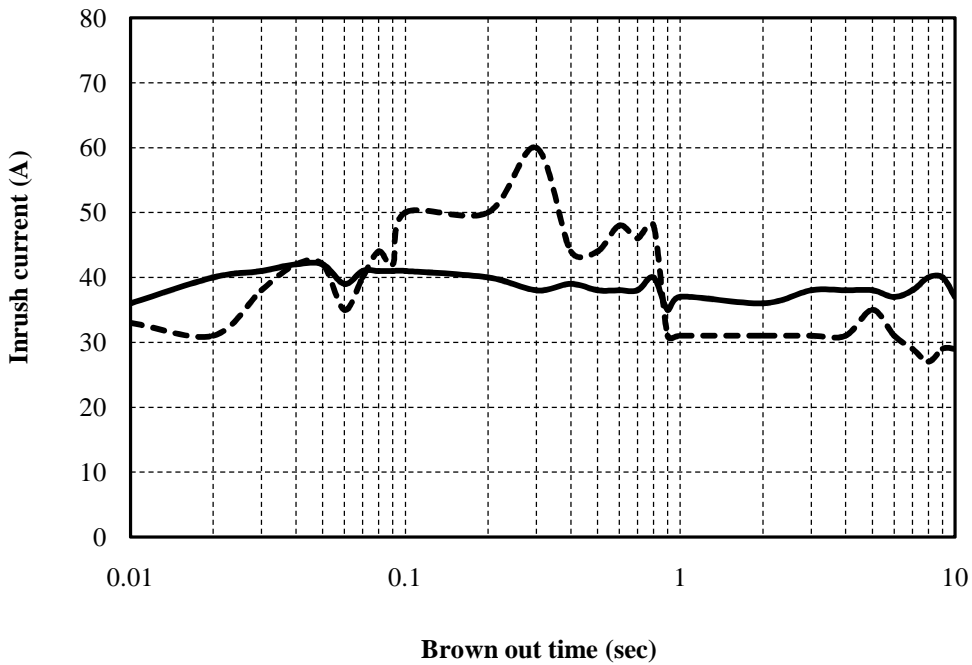


2.14 Inrush current waveform


Conditions Vin : 115 VAC  
 Iout : 100 %  
 Ta : 25 °C

12V

Switch on phase angle  
 of input AC voltage  
 $\phi = 0^\circ$

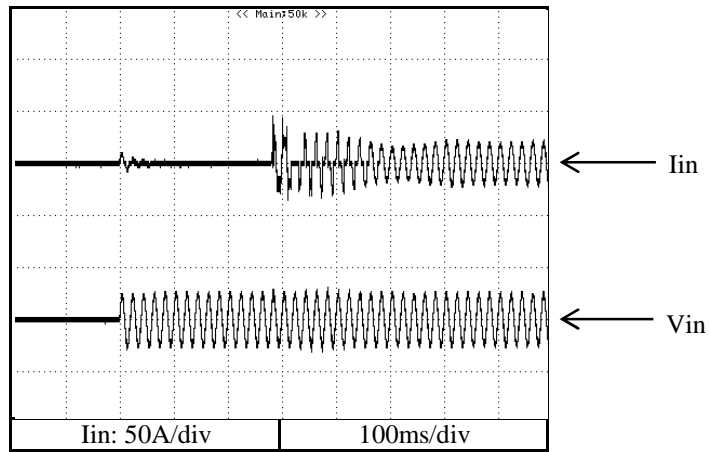

Switch on phase angle  
 of input AC voltage  
 $\phi = 90^\circ$

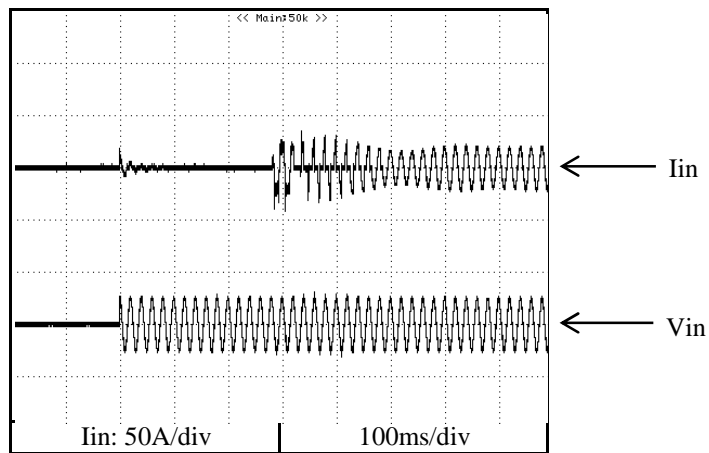


2.14 Inrush current waveform


Conditions Vin : 230 VAC  
 Iout : 100 %  
 Ta : 25 °C

12V

Switch on phase angle  
 of input AC voltage  
 $\phi = 0^\circ$

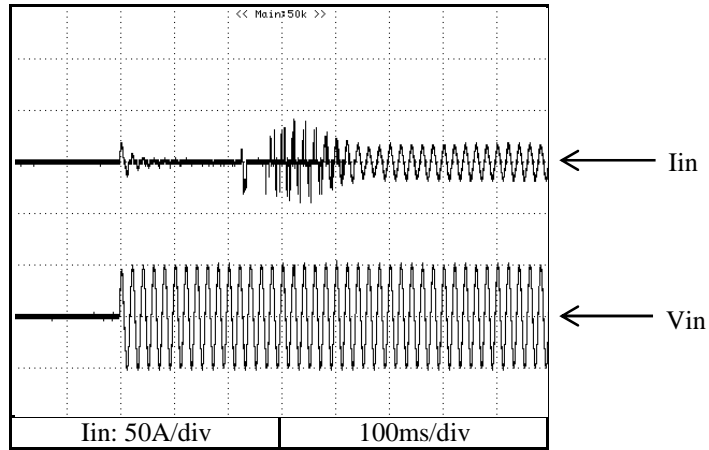

Switch on phase angle  
 of input AC voltage  
 $\phi = 90^\circ$

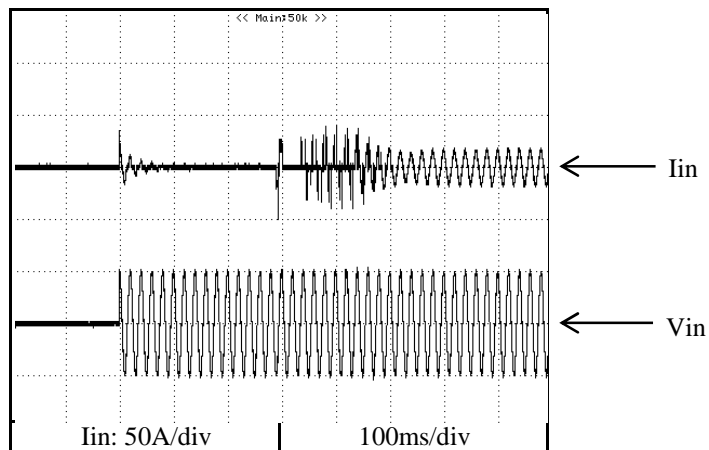


2.15 Input current waveform


Conditions Iout : 100 %  
Ta : 25 °C

12V

Vin = 115VAC

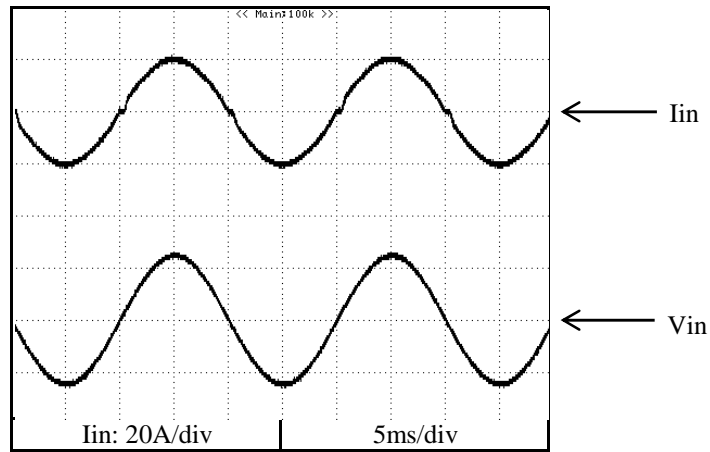


Vin = 230VAC

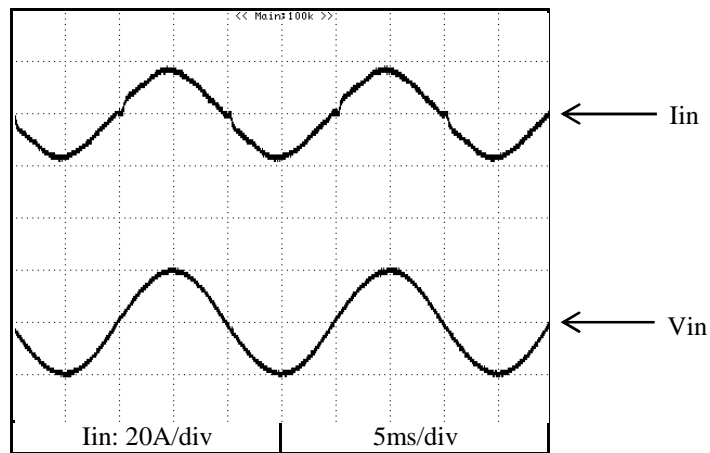


2.16 Leakage current characteristics

Conditions Iout : 0 % ---  
 : 100 % —  
 Ta : 25 °C  
 f : 60 Hz

12V

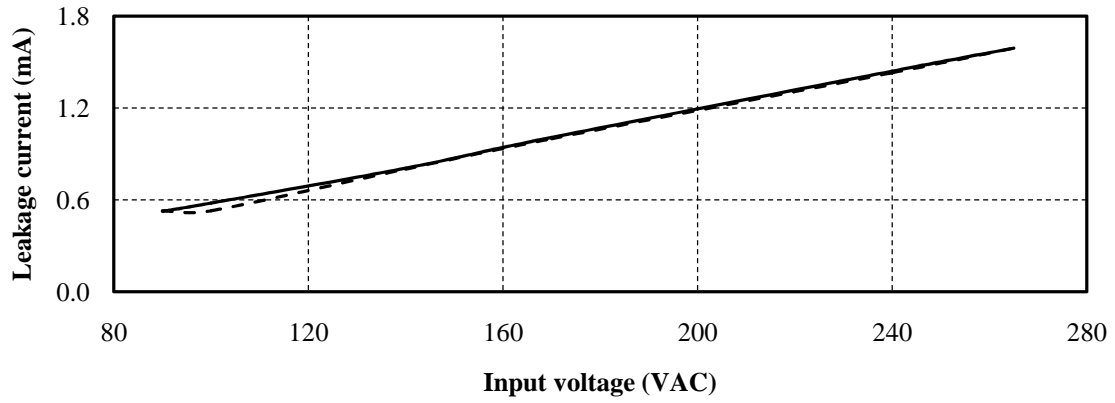

48V

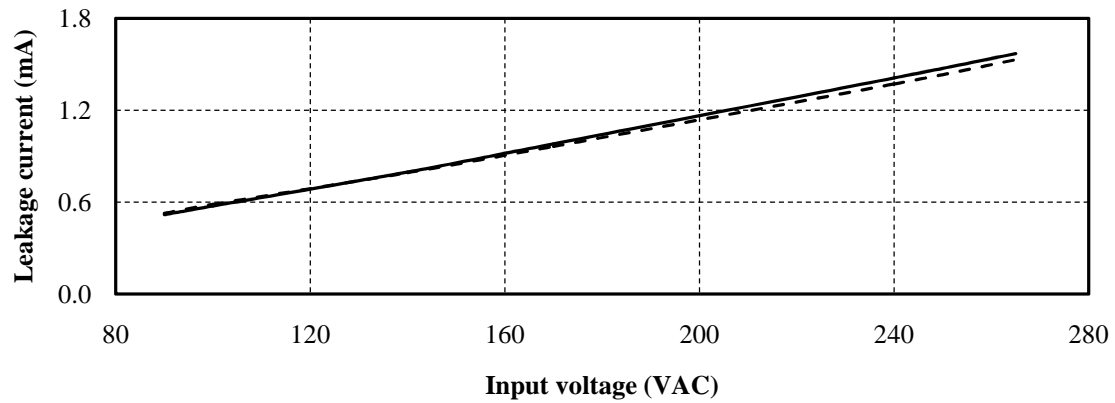


2.17 Output ripple and noise waveform


Conditions Vin : 115 VAC  
Iout : 100 %  
Ta : 25 °C

NORMAL MODE


12V

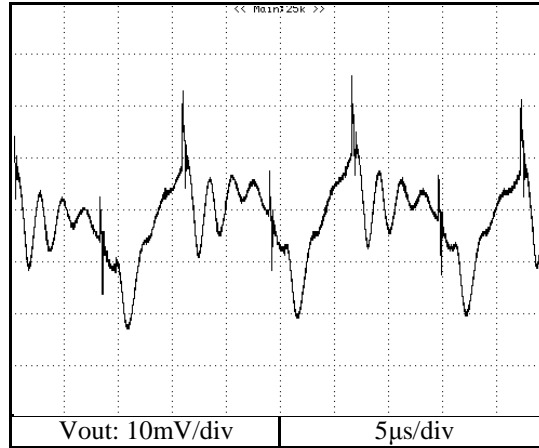

24V

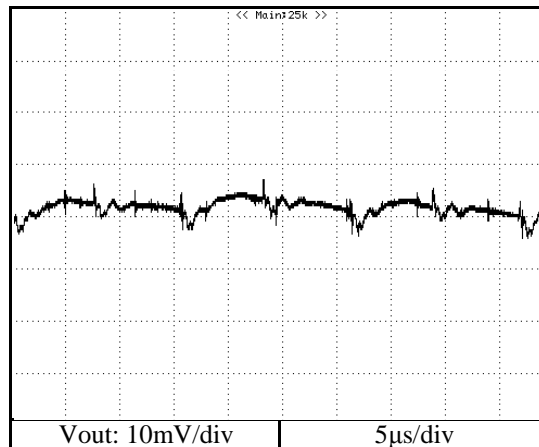

48V

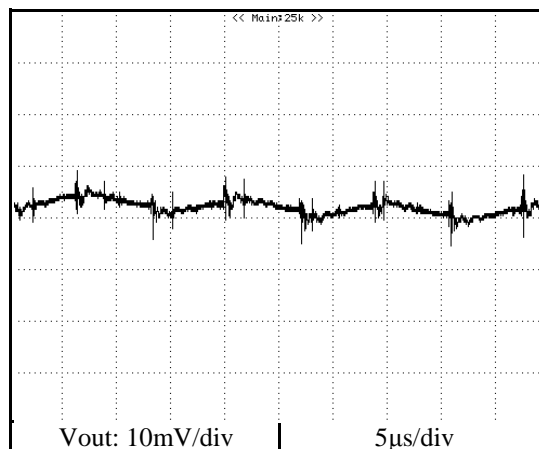


2.17 Output ripple and noise waveform


Conditions Vin : 115 VAC  
Iout : 100 %  
Ta : 25 °C

NORMAL + COMMON MODE


12V

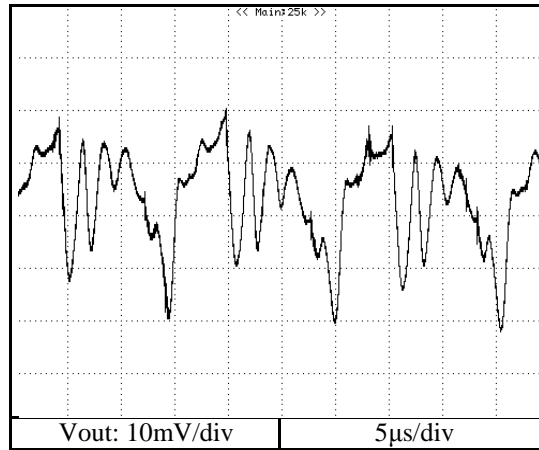

24V

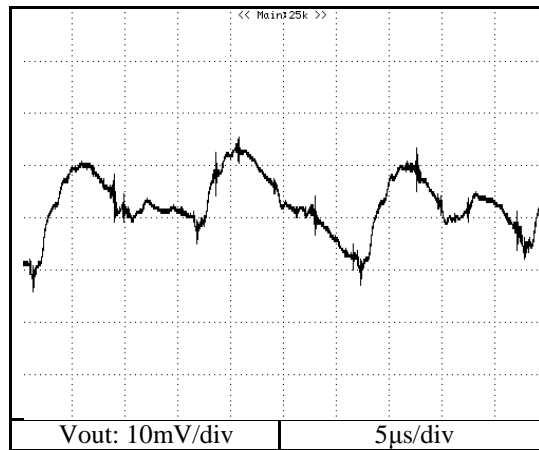

48V

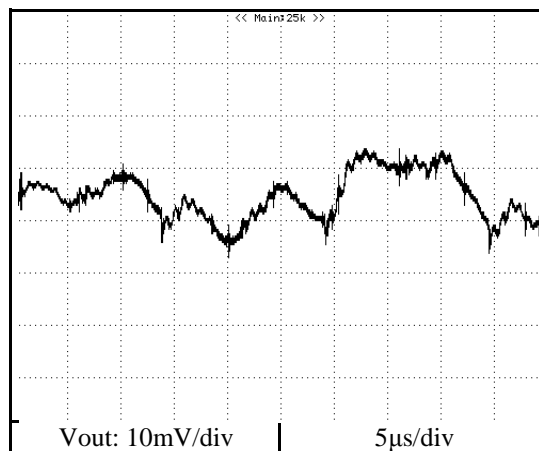


**2.18 Standby current**

Condition Ta : 25 °C

12V

I<sub>out</sub> = 0%

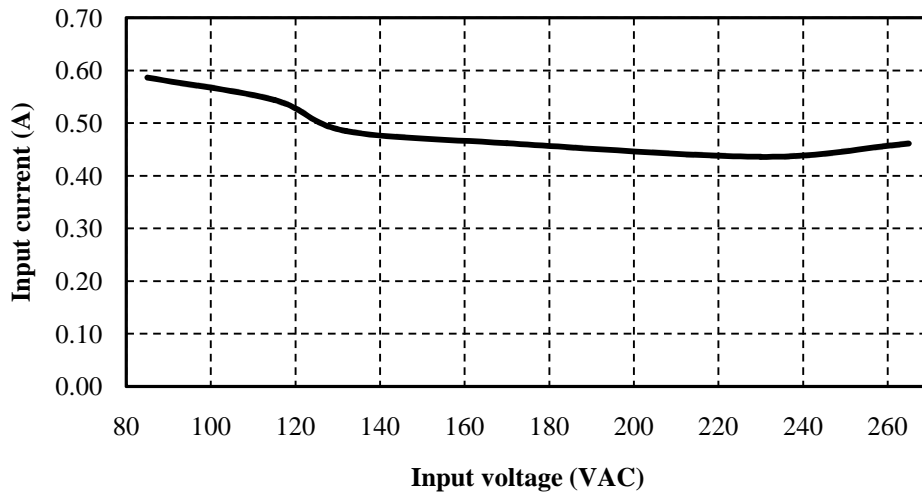

Remote control OFF

