

CCG3-48-xxS

EVALUATION DATA

型式データ

INDEX

	PAGE
1. 測定方法 Evaluation Method	
1-1. 測定回路 Measurement Circuits	3
(1) 静特性、待機電力特性、通電ドリフト特性、その他特性 Steady state, Standby power, Warm up voltage drift and Other characteristics	
(2) 入力サージ電流(突入電流)波形 Inrush current waveform	
(3) 出力リップルノイズ電圧、波形 Output ripple and noise voltage and waveform	
(4) EMI特性 Electro-Magnetic Interference characteristics	
1-2. 使用測定機器 List of equipment used	5
2. 特性データ Characteristics	
2-1. 静特性 Steady state characteristics	
(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift	6
(2) 出力電圧・出力リップルノイズ電圧 対 入力電圧 Output voltage and Output ripple and noise voltage vs. Input voltage	7
(3) 入力電流・効率 対 出力電流 Input current and Efficiency vs. Output current	9
(4) 効率 対 入力電圧 Efficiency vs. Input voltage	11
(5) 起動・遮断電圧特性 Start up and Drop out voltage characteristics	13
2-2. 待機電力特性 Standby power characteristics	15
2-3. 通電ドリフト特性 Warm up voltage drift characteristics	17
2-4. 過電流保護特性 Over current protection (OCP) characteristics	19
2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics	21
2-6. 過渡応答(負荷急変)特性 Dynamic load response characteristics	29
2-7. 入力サージ電流(突入電流)特性 Inrush current characteristics	30
2-8. 出力リップルノイズ波形 Output ripple and noise waveform	31
2-9. EMI特性 Electro-Magnetic Interference characteristics	32

使用記号 Terminology used

	定義	Definition
V_{in} 入力電圧	Input voltage
V_o 出力電圧	Output voltage
V_{RC} RC電圧	RC voltage
I_{in} 入力電流	Input current
I_o 出力電流	Output current
T_a 周囲温度	Ambient temperature
f 周波数	Frequency


※ 当社測定条件における結果であり、参考値としてお考え願います。
Test results are reference data based on our measurement condition.

1. 測定方法 Evaluation Method


1-1. 測定回路 Measurement Circuits

(1) 静特性、待機電力特性、通電ドリフト特性、その他特性


Steady state, Standby power, Warm up voltage drift and Other characteristics

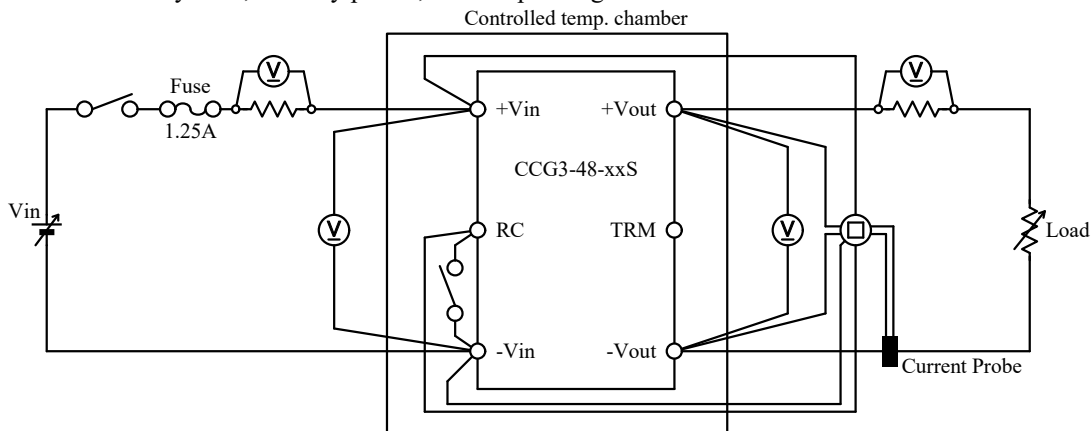

(2) 入力サージ電流(突入電流)波形 Inrush current waveform

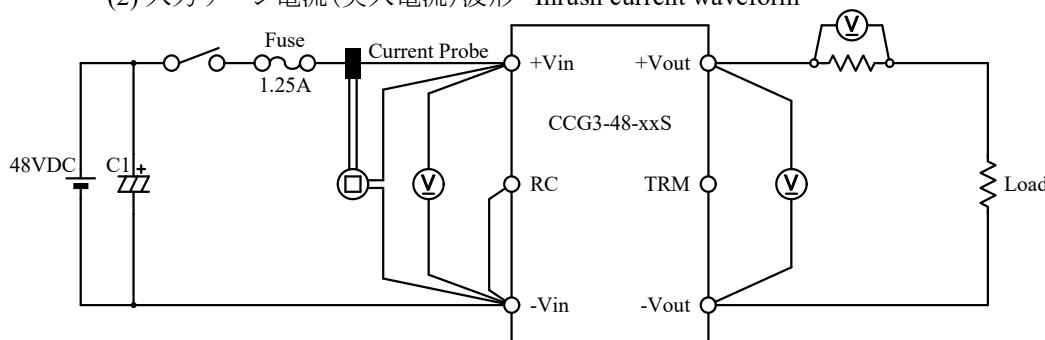

(3) 出力リップルノイズ電圧、波形 Output ripple and noise voltage and waveform

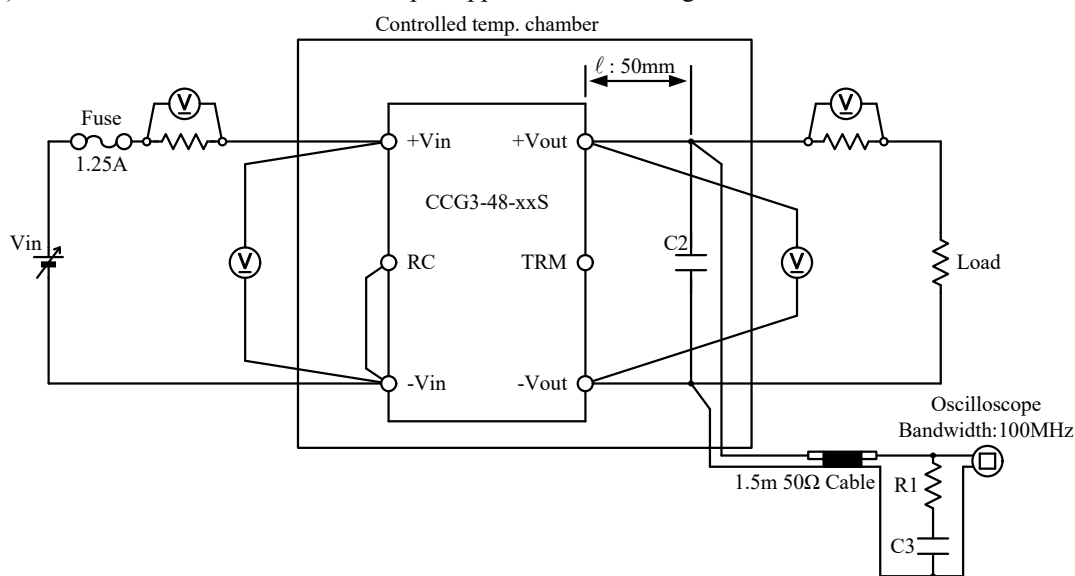


C1 : 4000 μ F
 C2 : 1 μ F
 C3 : 4700pF
 R1 : 50 Ω


Electrolytic Capacitor
 Ceramic Capacitor
 Ceramic Capacitor

(4) EMI特性 Electro-Magnetic Interference characteristics


(a) 雑音端子電圧(帰還ノイズ) Conducted Emission Noise

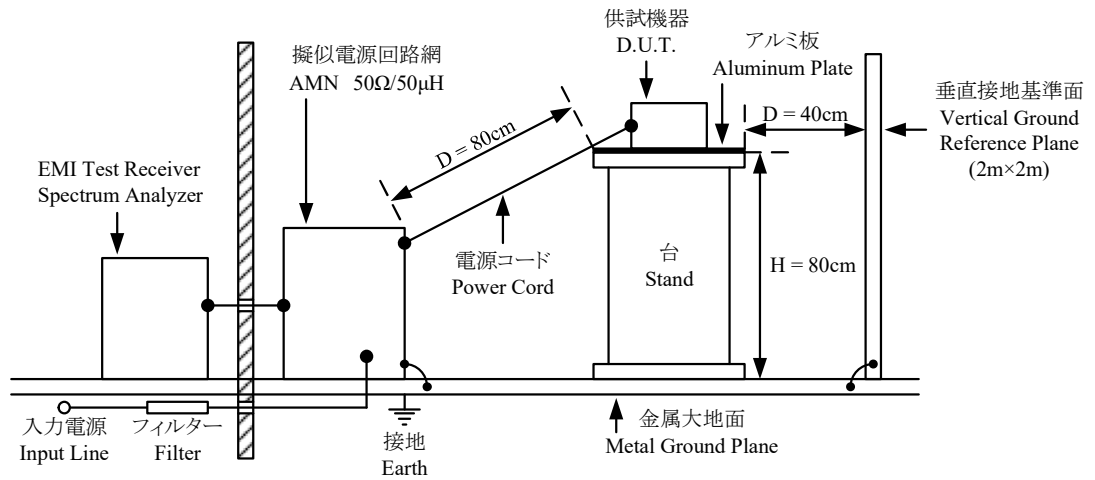

(b) 雑音電界強度(輻射ノイズ) Radiated Emission Noise

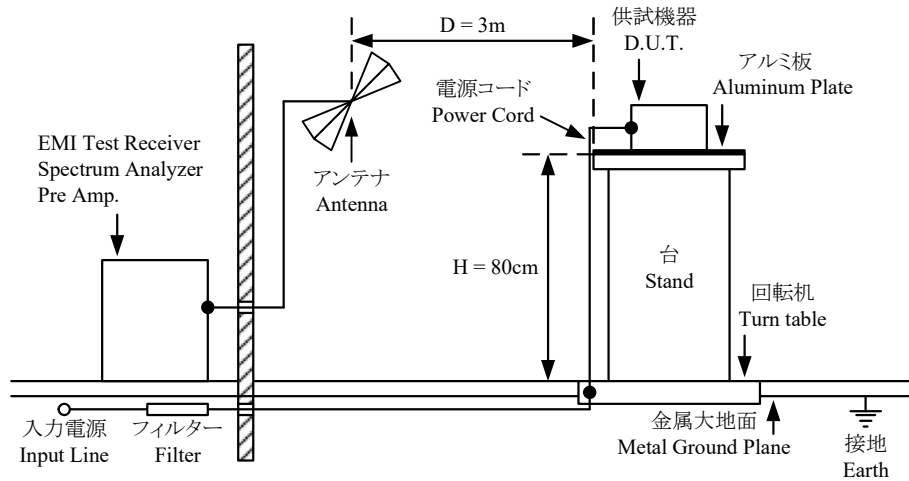

VCCI class A 対応アプリケーション VCCI class A application system

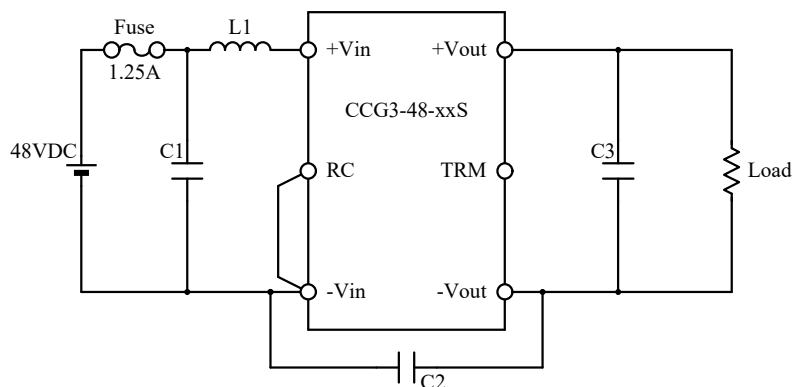

- | | | |
|-----------------|------------------------|-------------------------|
| C1 : 100V 2.2μF | Ceramic Capacitor | (C3216X7S2A225K, TDK) |
| C2 : 2kV 1000pF | Ceramic Capacitor | (C4520X7R3D102K, TDK) |
| C3 : 25V 10μF | Ceramic Capacitor | (C3216X7R1E106K, TDK) |
| L1 : 22μH 650mA | Normal Mode Choke Coil | (LQH32PB220MNC, MURATA) |

1-2. 使用測定機器 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA ELECT.	DL1740E / DL1740EL
2	DIGITAL MULTIMETER	AGILENT	34970A
3	CURRENT PROBE	YOKOGAWA ELECT.	701932
4	CURRENT PROBE	AGILENT	N2774A
5	SHUNT RESISTER	YOKOGAWA ELECT.	2215
6	DYNAMIC DUMMY LOAD	KIKUSUI	PLZ-164WL
7	CVCF	NF	ES10000S
8	DC POWER SUPPLY	TDK-Lambda	GEN80-9.5 / GENH80-9.5
9	DC POWER SUPPLY	TAKASAGO	EX-750H2
10	CONTROLLED TEMP. CHAMBER	ESPEC	SU-261 / SU-262
11	EMI TEST RECEIVER / SPECTRUM ANALYZER	ROHDE & SCHWARZ	ESR3
12	PRE AMP.	SONOMA	310N
13	AMN	KIKUSUI	KNW-242C
14	ANTENNA	SCHWARZBECK	BBA9106/VHA9103
15	ANTENNA	SCHWARZBECK	UHALP9107

2. 特性データ Characteristics

2-1. 静特性 Steady state characteristics

(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift

3.3V

1. Regulation - line and load

Condition Ta : 25 °C

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	3.3076V	3.3076V	3.3076V	3.3076V	0.0mV	0.000%
50% (0.4A)	3.3071V	3.3071V	3.3071V	3.3071V	0.0mV	0.000%
100% (0.8A)	3.3066V	3.3066V	3.3066V	3.3066V	0.0mV	0.000%
Load regulation	1.0mV	1.0mV	1.0mV	1.0mV		
	0.030%	0.030%	0.030%	0.030%		

2. Temperature drift

Conditions Vin : 48 VDC

Io : 100 %

Ta	-40°C	25°C	80°C	Temperature stability	
Vo	3.3129V	3.3066V	3.2992V	13.7mV	0.415%

5V

1. Regulation - line and load

Condition Ta : 25 °C

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	4.9936V	4.9938V	4.9939V	4.9939V	0.3mV	0.006%
50% (0.3A)	4.9935V	4.9936V	4.9938V	4.9940V	0.5mV	0.010%
100% (0.6A)	4.9937V	4.9937V	4.9939V	4.9941V	0.4mV	0.008%
Load regulation	0.2mV	0.2mV	0.1mV	0.2mV		
	0.004%	0.004%	0.002%	0.004%		

2. Temperature drift

Conditions Vin : 48 VDC

Io : 100 %

Ta	-40°C	25°C	80°C	Temperature stability	
Vo	4.9861V	4.9939V	5.0013V	15.2mV	0.304%

12V

1. Regulation - line and load

Condition Ta : 25 °C

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	12.0644V	12.0646V	12.0641V	12.0641V	0.5mV	0.004%
50% (0.125A)	12.0639V	12.0640V	12.0639V	12.0637V	0.3mV	0.002%
100% (0.25A)	12.0636V	12.0636V	12.0637V	12.0637V	0.1mV	0.001%
Load regulation	0.8mV	1.0mV	0.4mV	0.4mV		
	0.007%	0.008%	0.003%	0.003%		

2. Temperature drift

Conditions Vin : 48 VDC

Io : 100 %

Ta	-40°C	25°C	85°C	Temperature stability	
Vo	12.0788V	12.0637V	12.0283V	50.5mV	0.421%

15V

1. Regulation - line and load

Condition Ta : 25 °C

Io \ Vin	18VDC	24VDC	48VDC	76VDC	Line regulation	
0%	15.1782V	15.1790V	15.1789V	15.1789V	0.8mV	0.005%
50% (0.1A)	15.1779V	15.1785V	15.1785V	15.1788V	0.9mV	0.006%
100% (0.2A)	15.1784V	15.1790V	15.1790V	15.1789V	0.6mV	0.004%
Load regulation	0.5mV	0.5mV	0.5mV	0.1mV		
	0.003%	0.003%	0.003%	0.001%		

2. Temperature drift

Conditions Vin : 48 VDC

Io : 100 %


Ta	-40°C	25°C	85°C	Temperature stability	
Vo	15.1739V	15.1790V	15.1498V	29.2mV	0.195%

(2) 出力電圧・出力リップルノイズ電圧 対 入力電圧


Output voltage and Output ripple and noise voltage vs. Input voltage

Conditions Io : 100 %
 Ta : -40 °C
 : 25 °C
 : 80 °C
 : 85 °C

3.3V

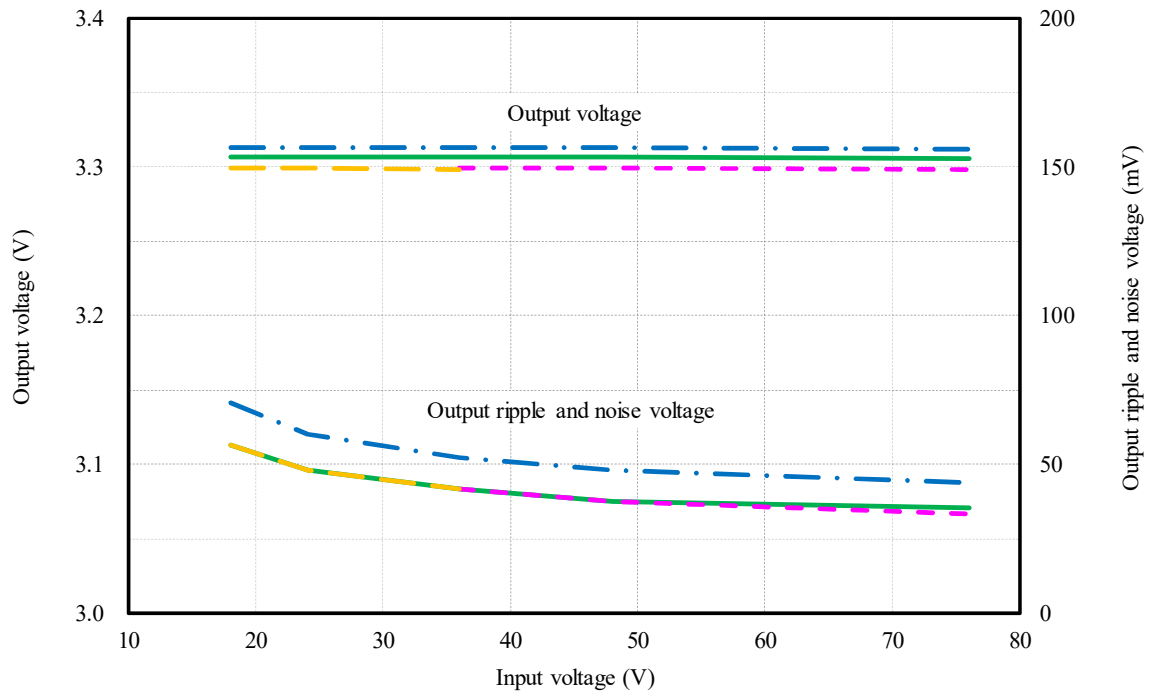

5V

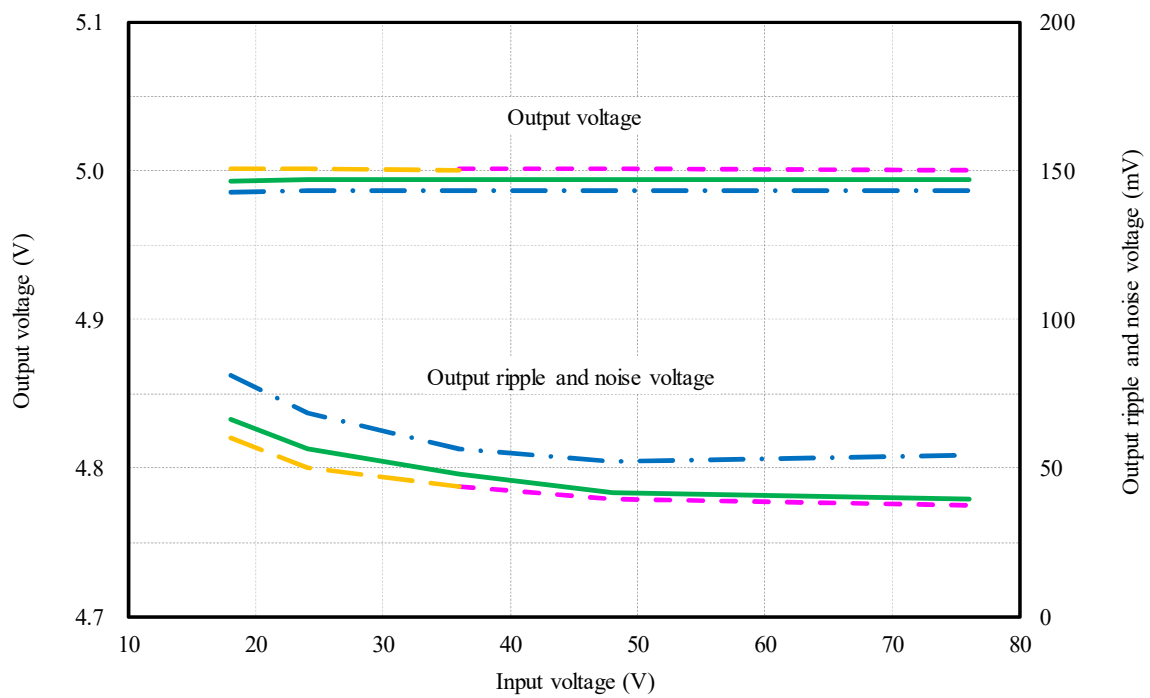


(2) 出力電圧・出力リップルノイズ電圧 対 入力電圧


Output voltage and Output ripple and noise voltage vs. Input voltage

Conditions Io : 100 %
 Ta : -40 °C
 : 25 °C
 : 85 °C

12V

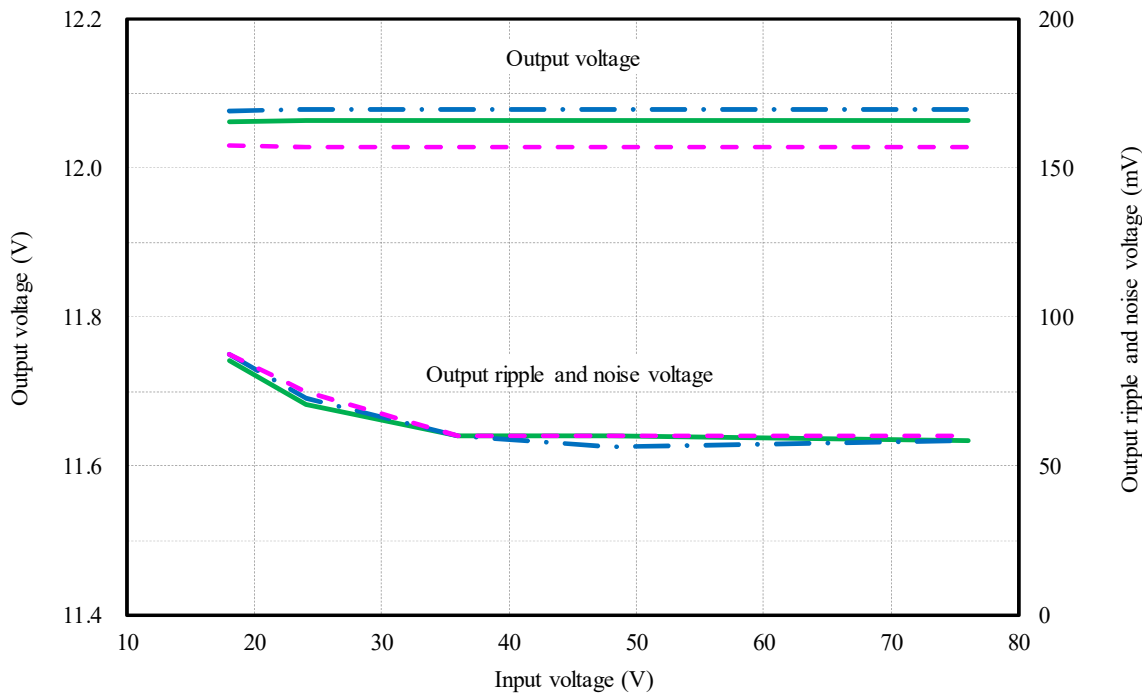


15V

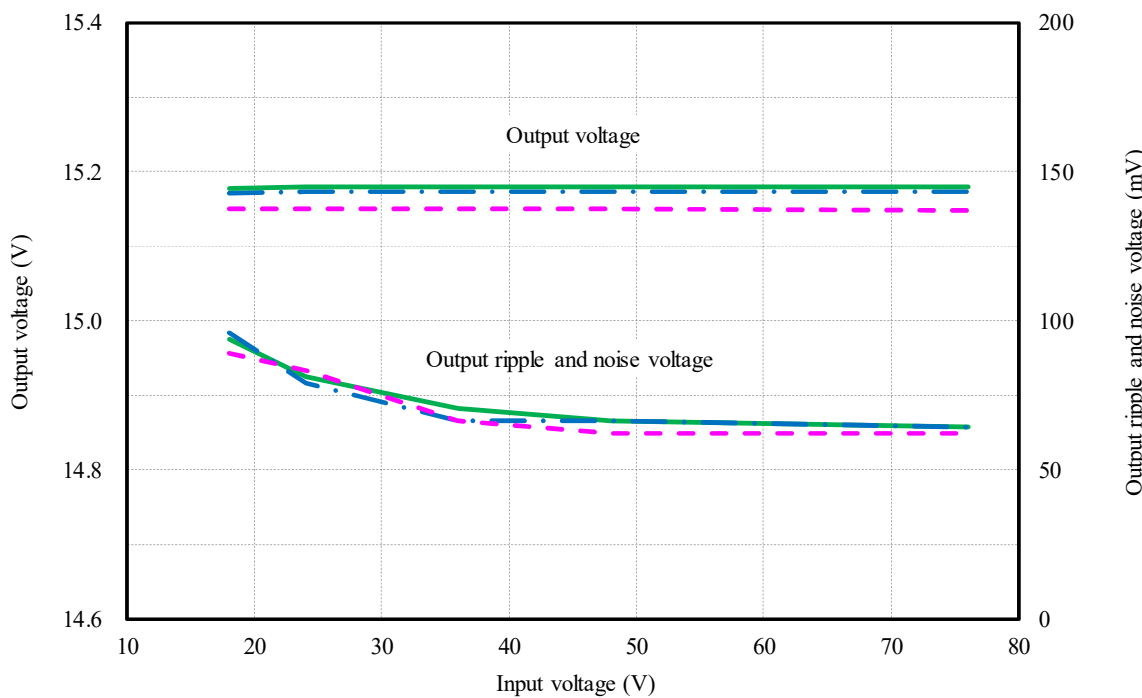


(3) 入力電流・効率 対 出力電流 Input current and Efficiency vs. Output current

Conditions Vin : 18 VDC ————
 : 24 VDC - · - · -
 : 48 VDC ————
 : 76 VDC - · - · -
 Ta : 25 °C

3.3V

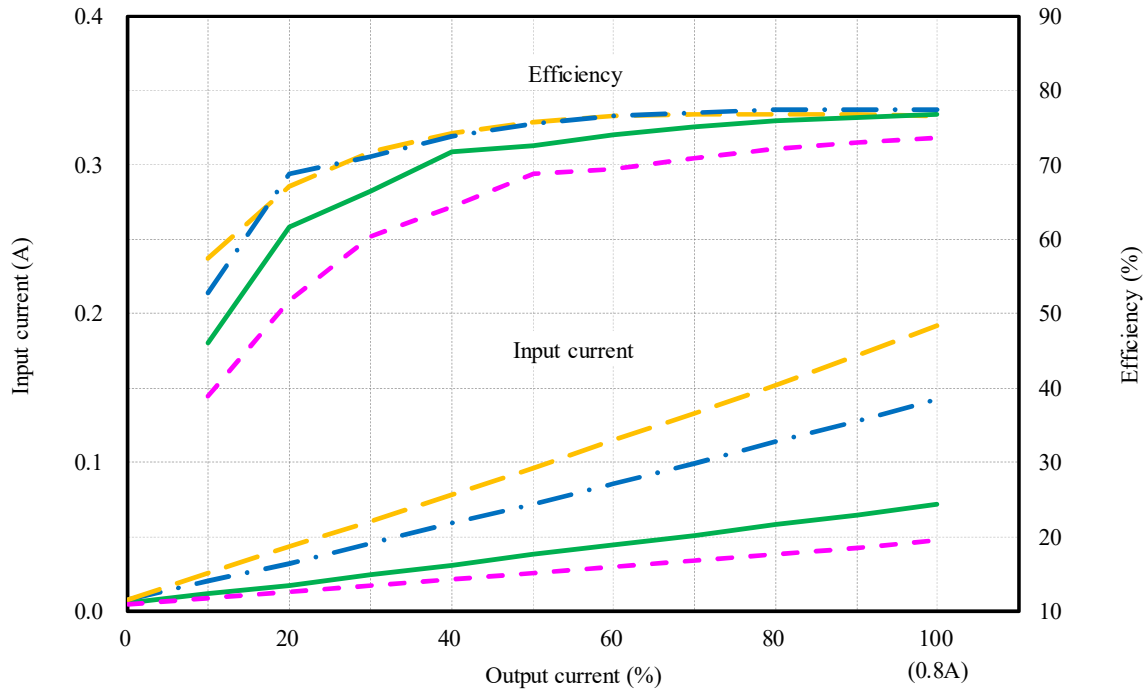


5V

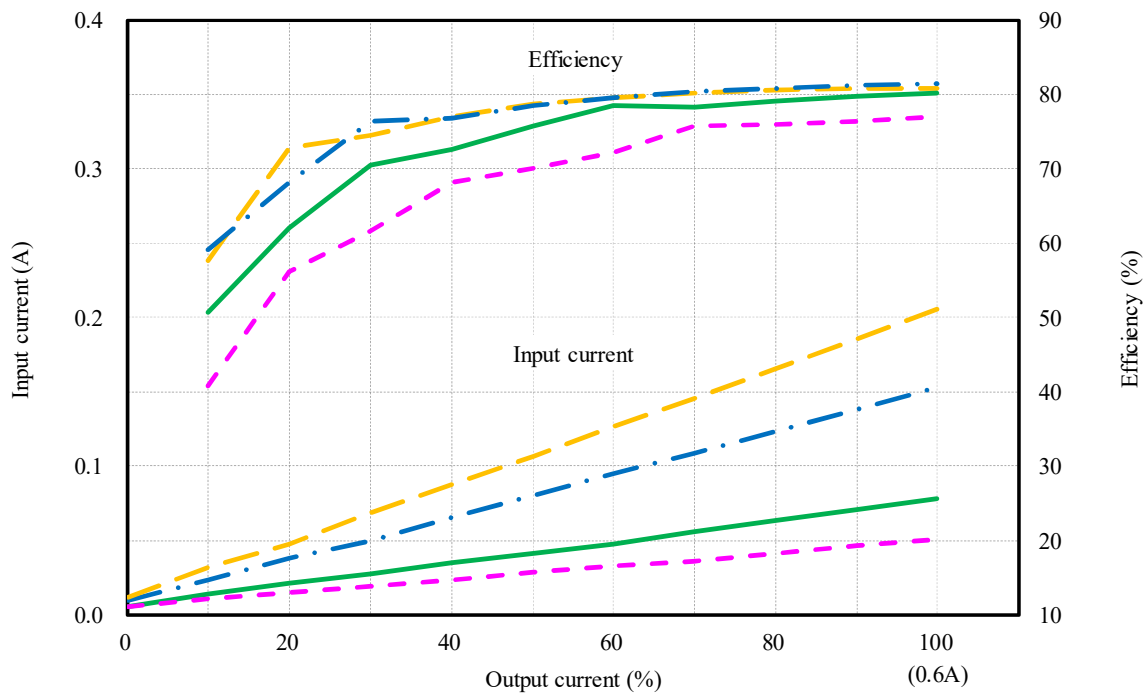


(3) 入力電流・効率 対 出力電流 Input current and Efficiency vs. Output current

Conditions Vin : 18 VDC ————
 : 24 VDC - · - · -
 : 48 VDC ————
 : 76 VDC - · - · -
 Ta : 25 °C

12V

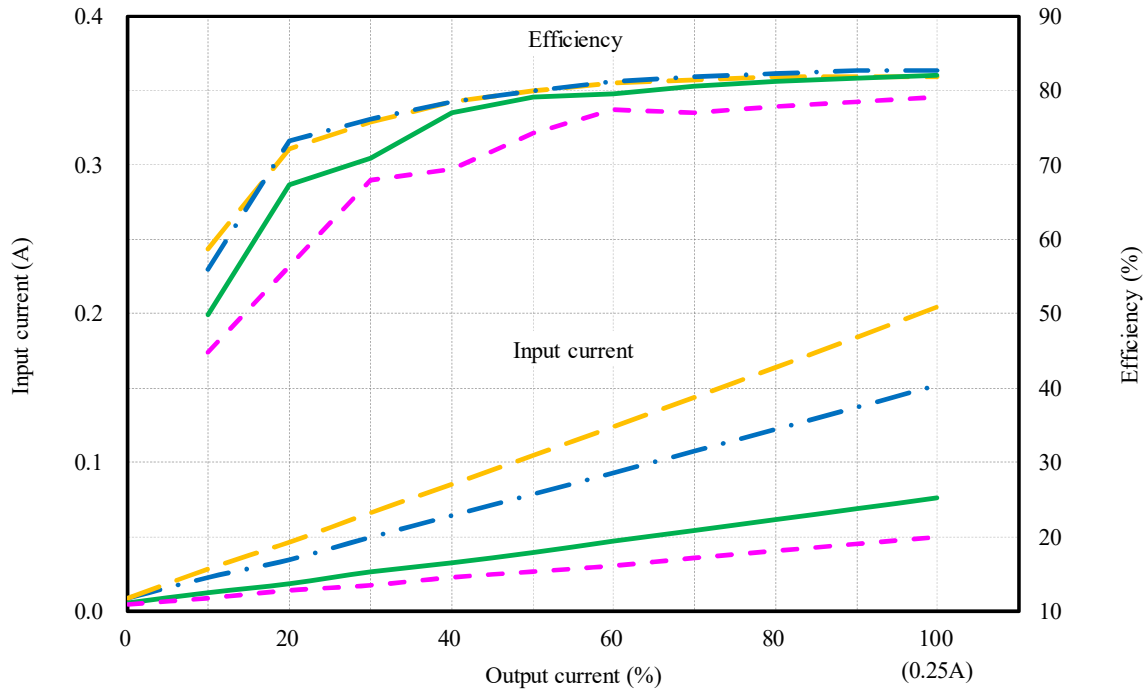


15V

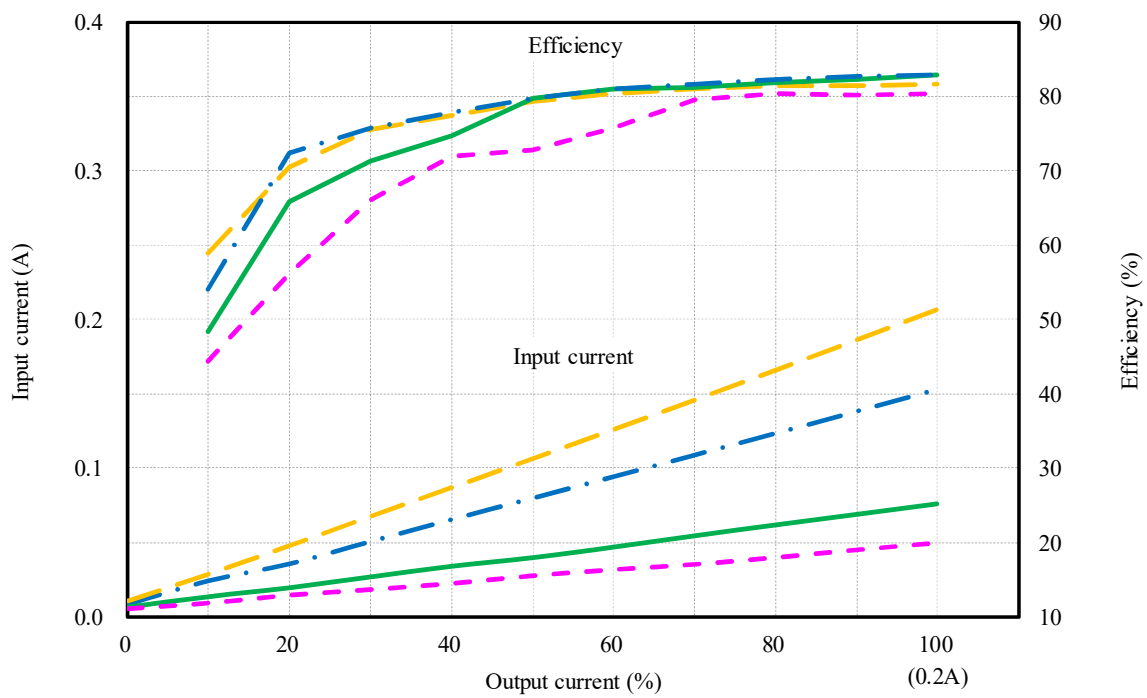


(4) 効率 対 入力電圧 Efficiency vs. Input voltage

Conditions Io : 50 % ---
 : 100 % —
 Ta : 25 °C

3.3V

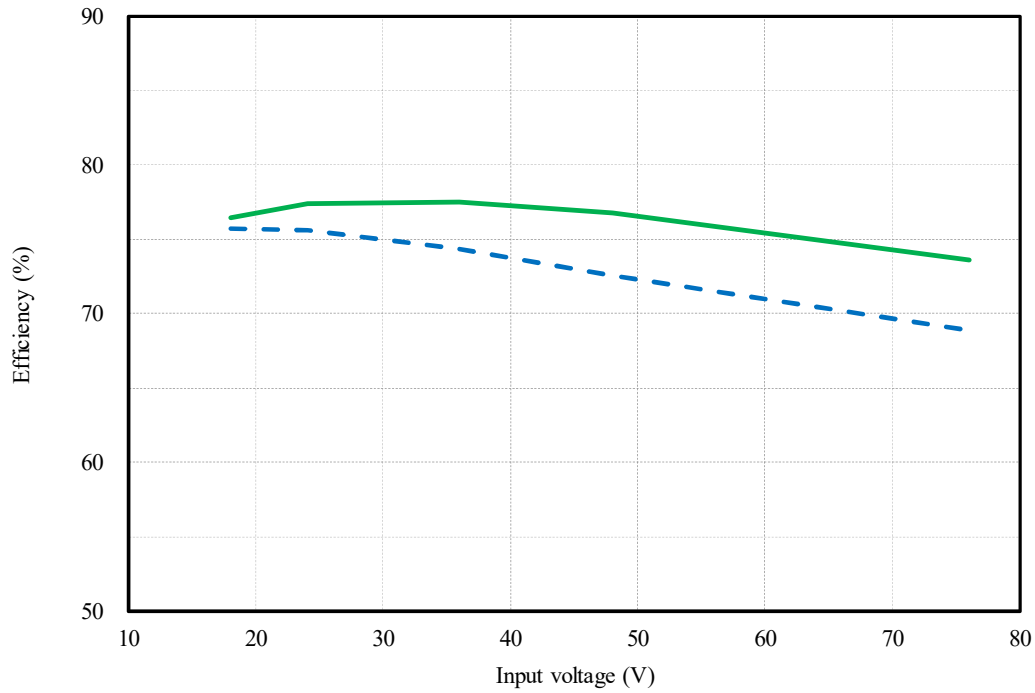


5V

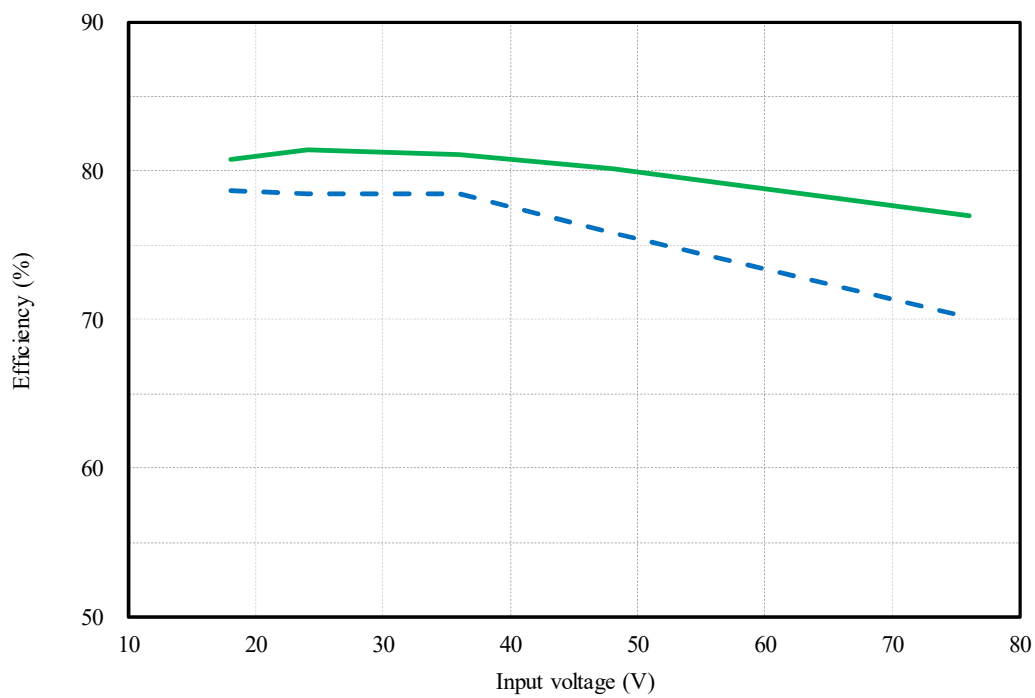


(4) 効率 対 入力電圧 Efficiency vs. Input voltage

Conditions Io : 50 % ---
 : 100 % —
 Ta : 25 °C

12V

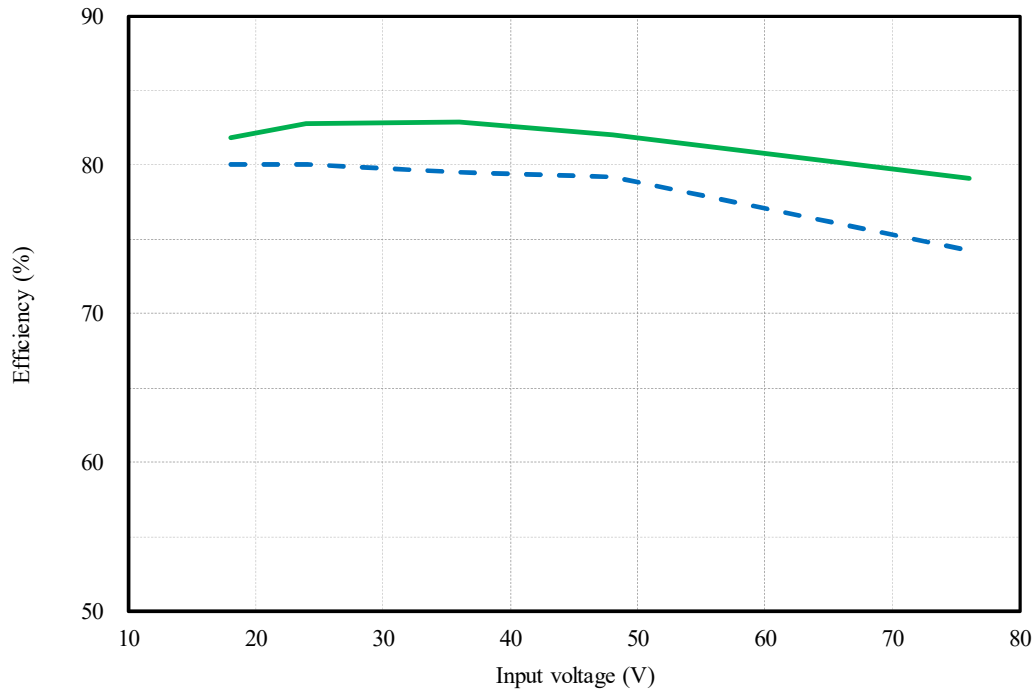

15V

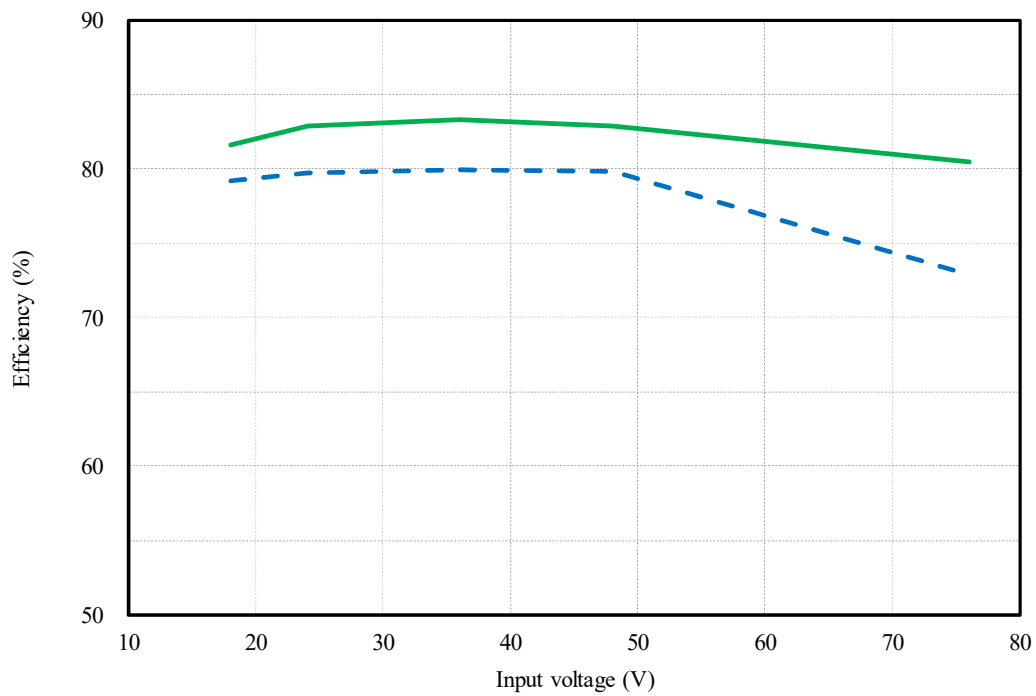

(5) 起動・遮断電圧特性 Start up and Drop out voltage characteristics

出力電圧 対 入力電圧

Output voltage vs. Input voltage



Conditions I_o : 100 %
 T_a : 25 °C

入力電流 対 入力電圧



Input current vs. Input voltage

Conditions I_o : 100 %
 T_a : 25 °C

3.3V

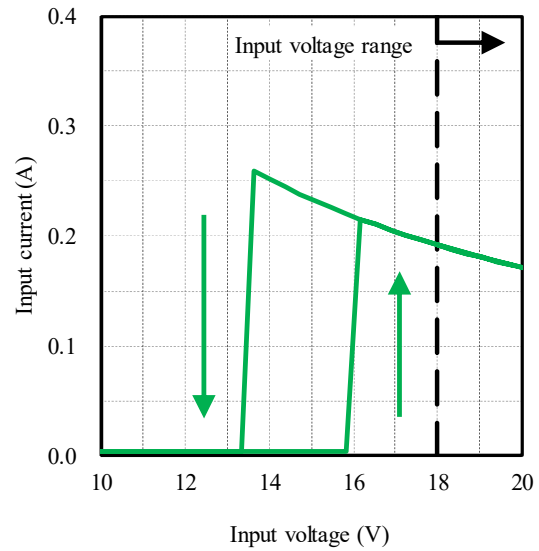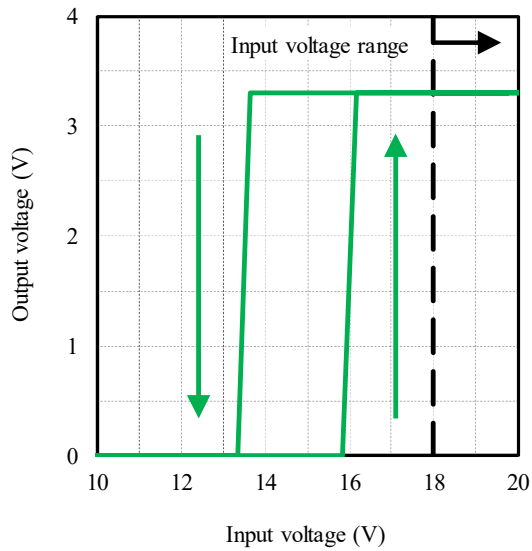

5V

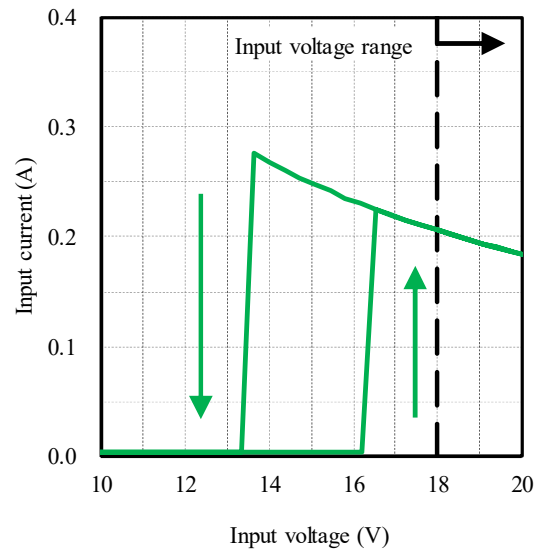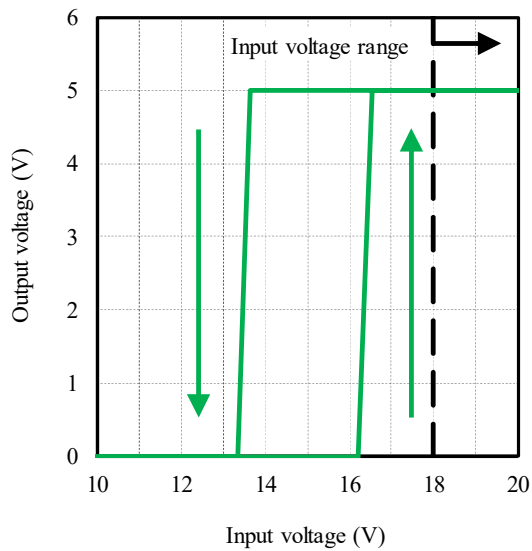

(5) 起動・遮断電圧特性 Start up and Drop out voltage characteristics

出力電圧 対 入力電圧

Output voltage vs. Input voltage



Conditions I_o : 100 %
 T_a : 25 °C

入力電流 対 入力電圧



Input current vs. Input voltage

Conditions I_o : 100 %
 T_a : 25 °C

12V

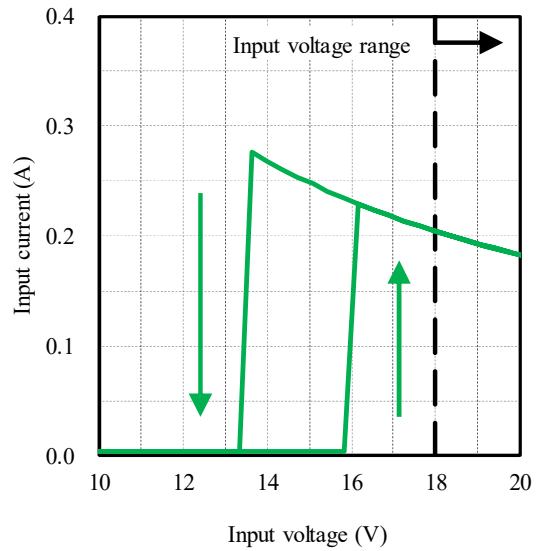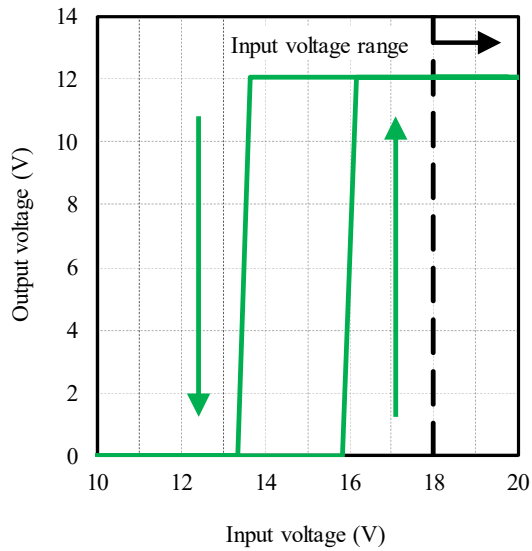


15V

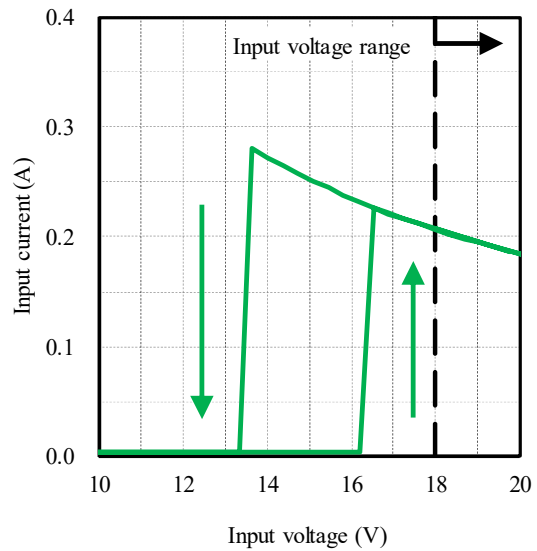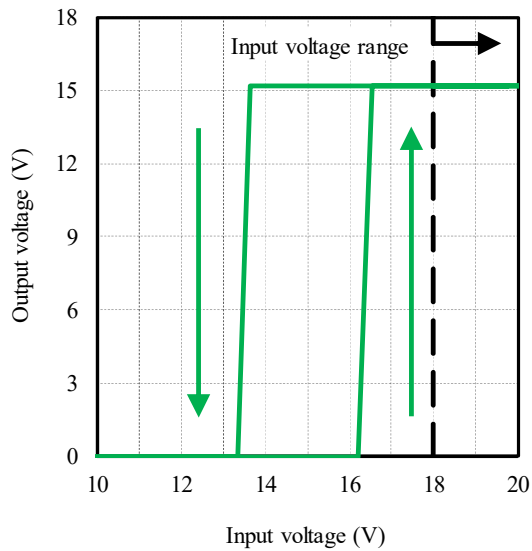


2-2. 待機電力特性 Standby power characteristics

Condition Ta : 25 °C

3.3V

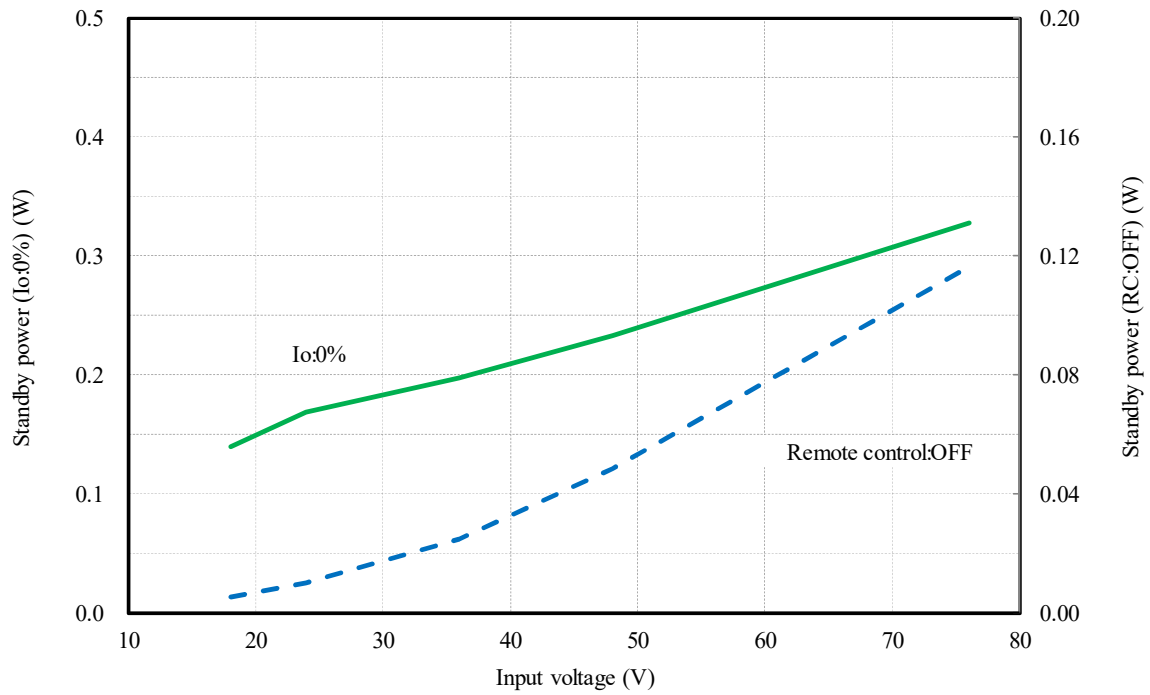


5V

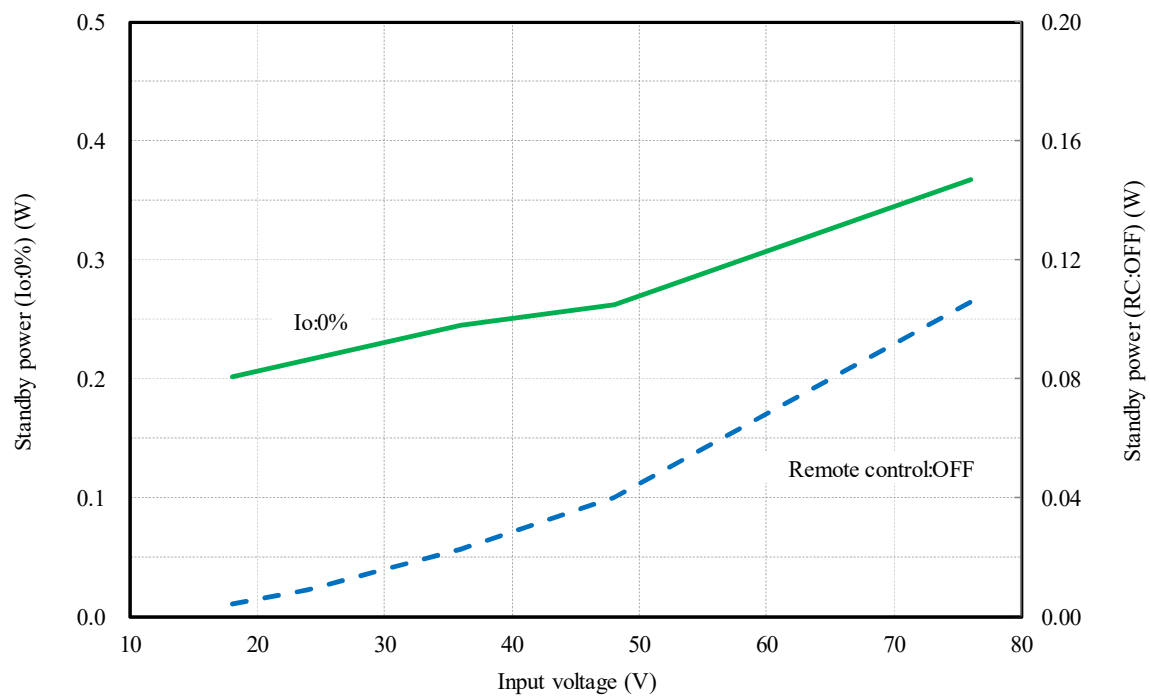


2-2. 待機電力特性 Standby power characteristics

Condition Ta : 25 °C

12V

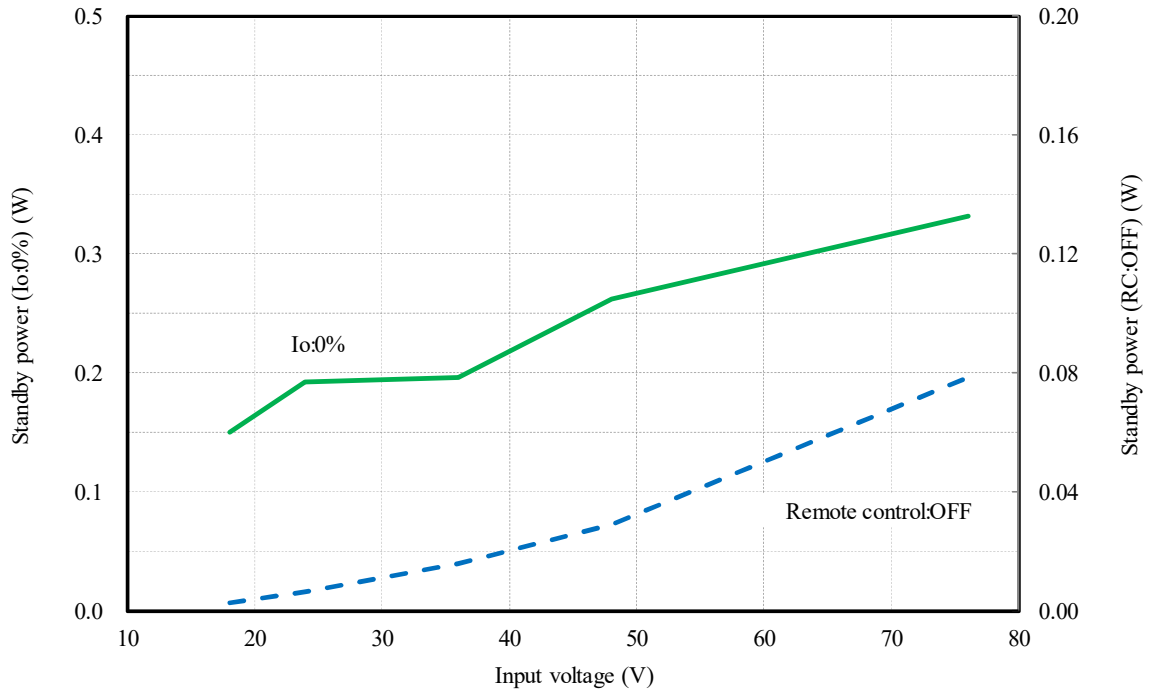


15V

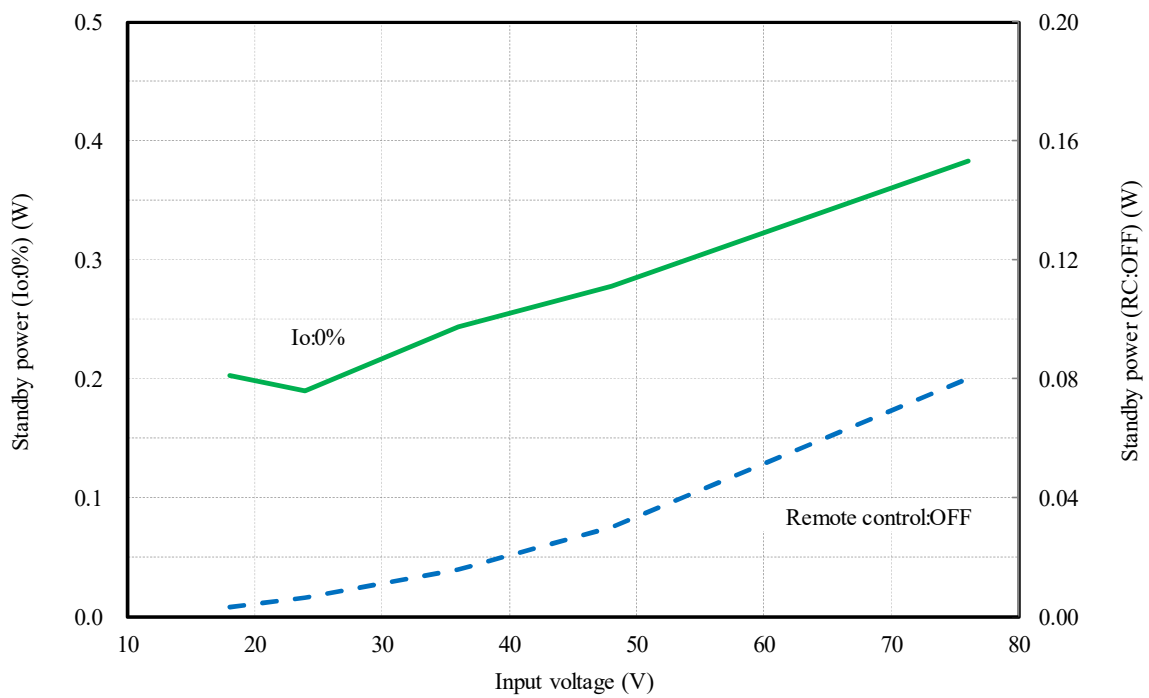


2-3. 通電ドリフト特性 Warm up voltage drift characteristics

Conditions Vin : 48 VDC
 Io : 100 %
 Ta : 25 °C

3.3V

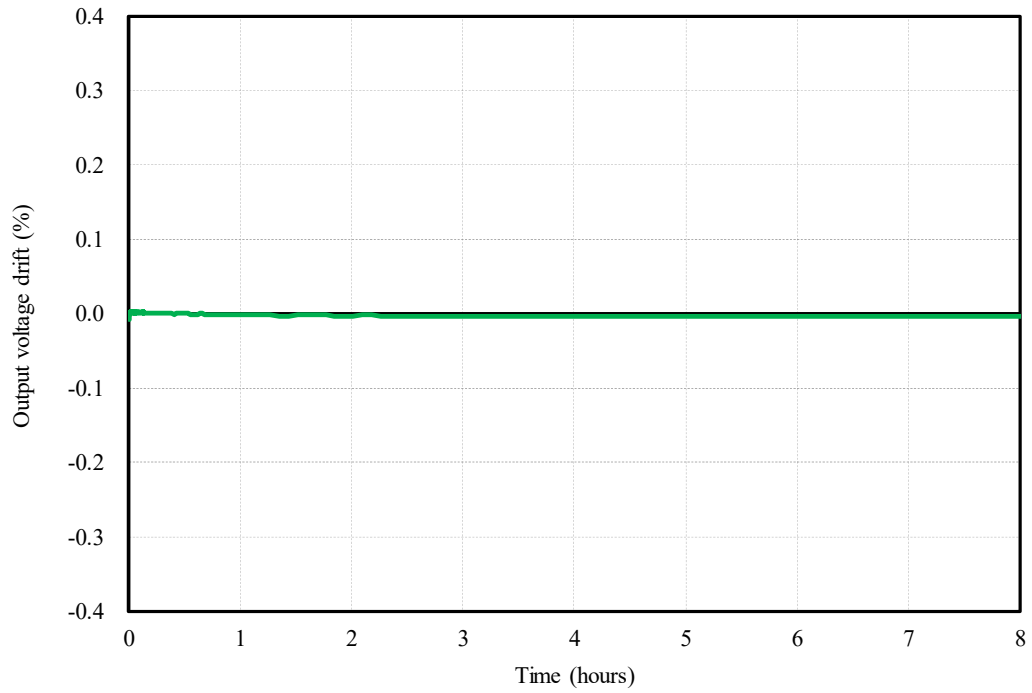


5V

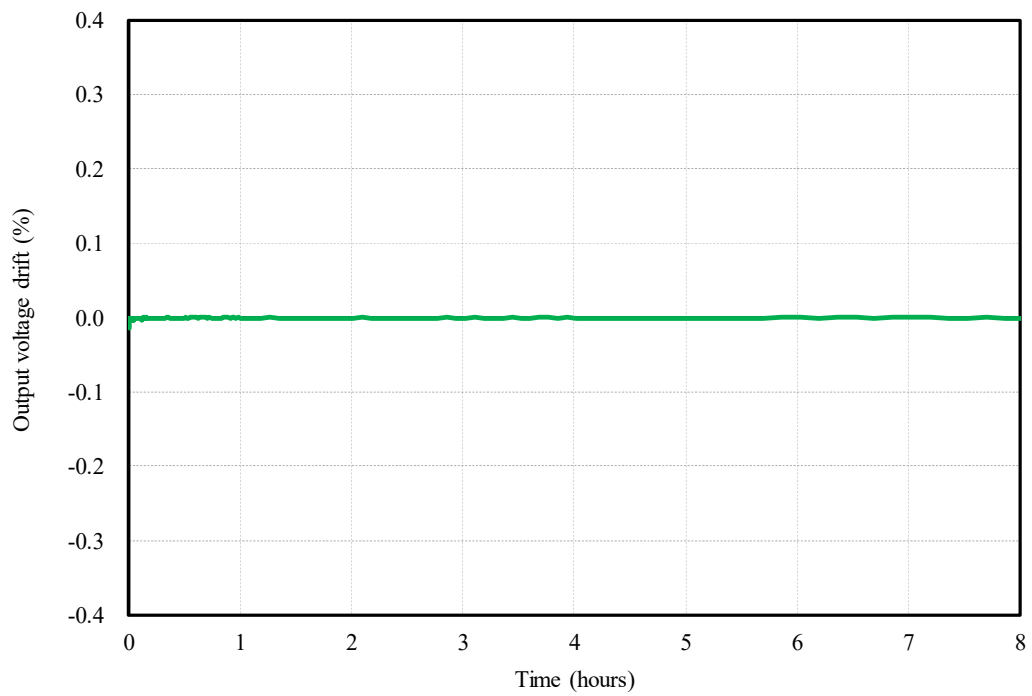


2-3. 通電ドリフト特性 Warm up voltage drift characteristics

Conditions Vin : 48 VDC
 Io : 100 %
 Ta : 25 °C

12V

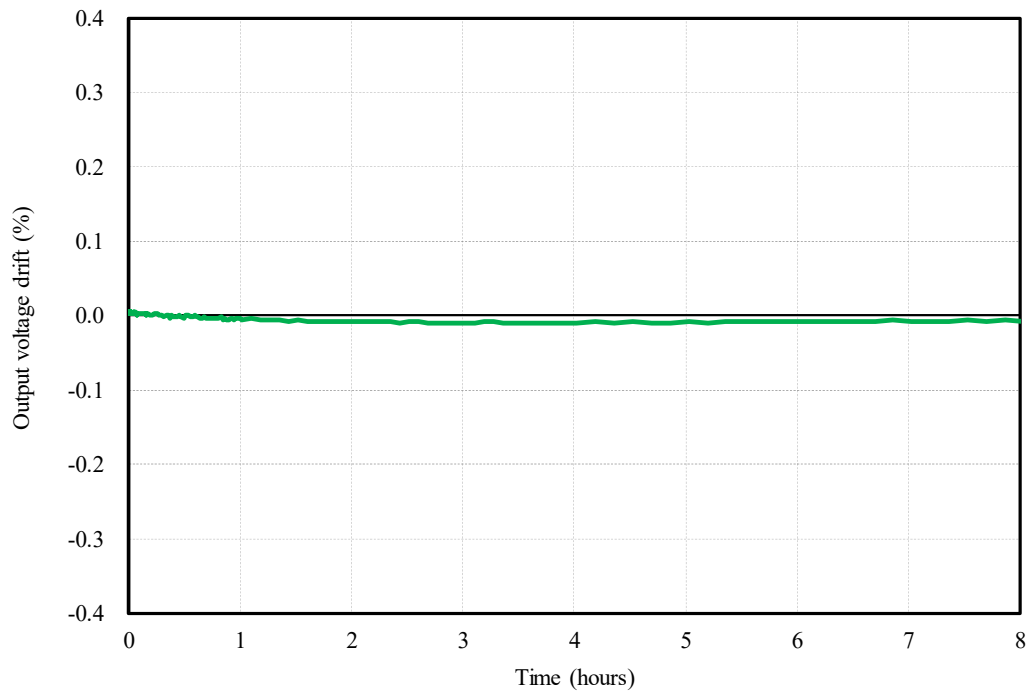

15V

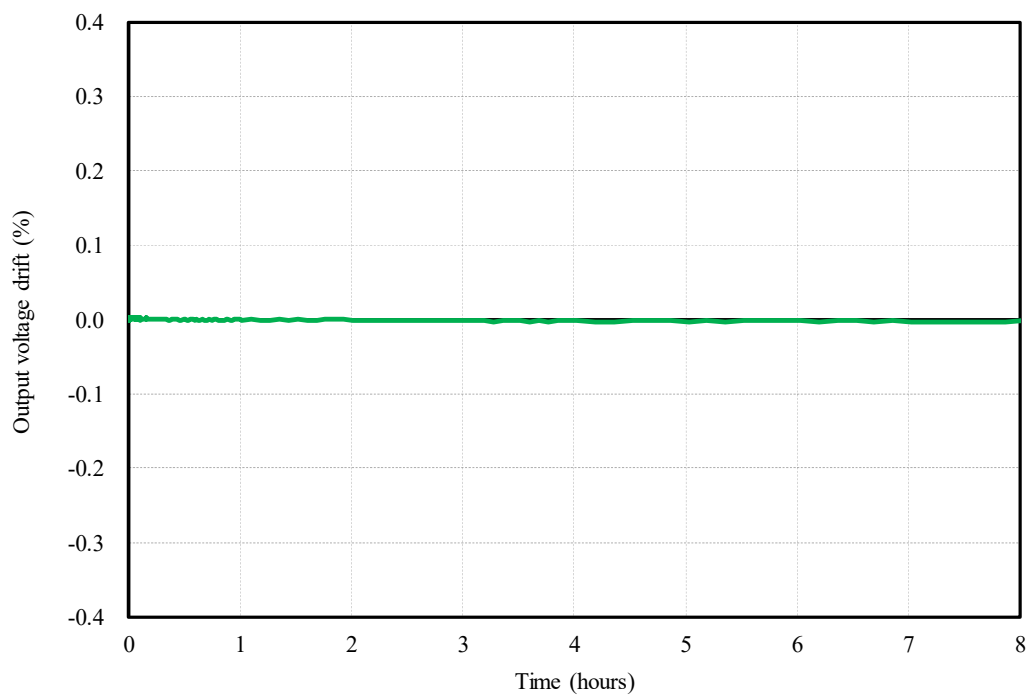

2-4. 過電流保護特性 Over current protection (OCP) characteristics

入力電圧依存性

Input voltage dependence



Conditions Vin : 18 VDC ———
 : 24 VDC - - -
 : 48 VDC ———
 : 76 VDC - - -
 Ta : 25 °C

周囲温度依存性



Ambient temperature dependence

Conditions Vin : 48 VDC
 Ta : -40 °C - - -
 : 25 °C ———
 : 80 °C ———

3.3V

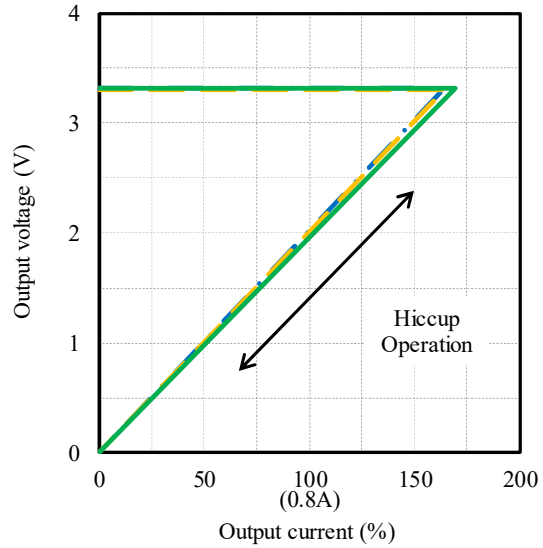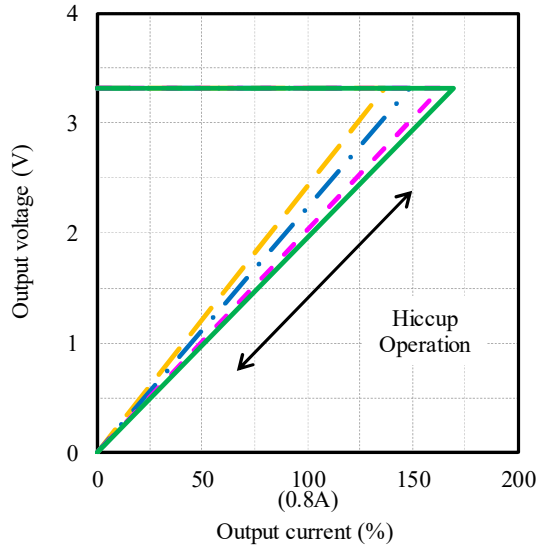

5V

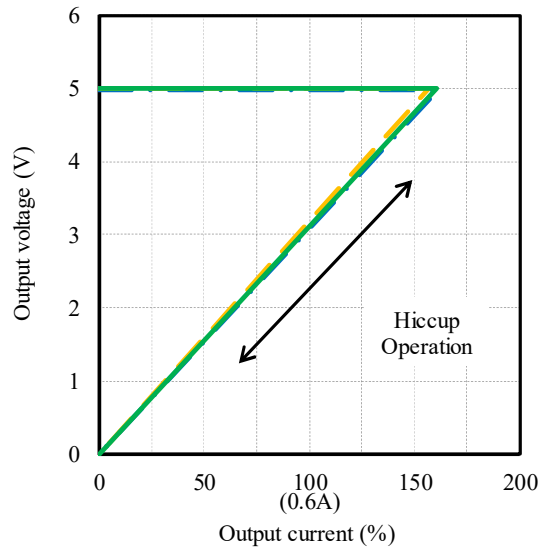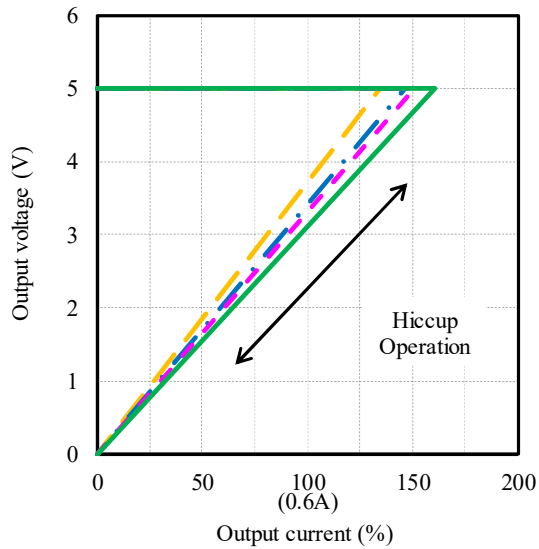

2-4. 過電流保護特性 Over current protection (OCP) characteristics

入力電圧依存性

Input voltage dependence



Conditions Vin : 18 VDC ———
 : 24 VDC - - -
 : 48 VDC ———
 : 76 VDC - - -
 Ta : 25 °C

周囲温度依存性



Ambient temperature dependence

Conditions Vin : 48 VDC
 Ta : -40 °C - - -
 : 25 °C ———
 : 85 °C - - -

12V

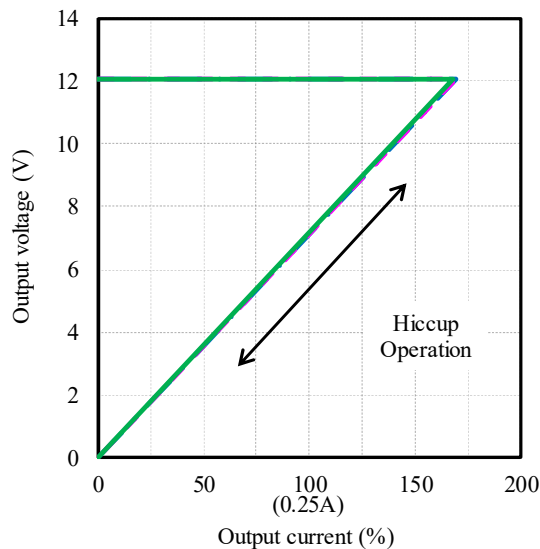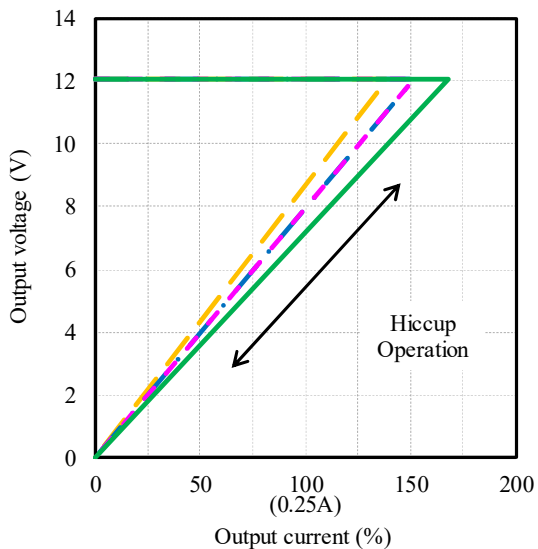



15V

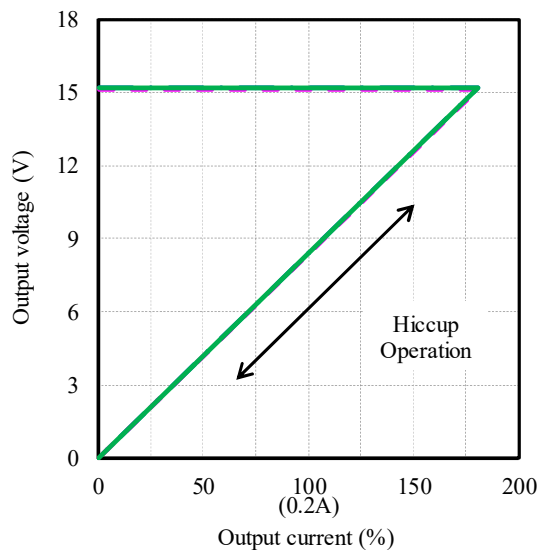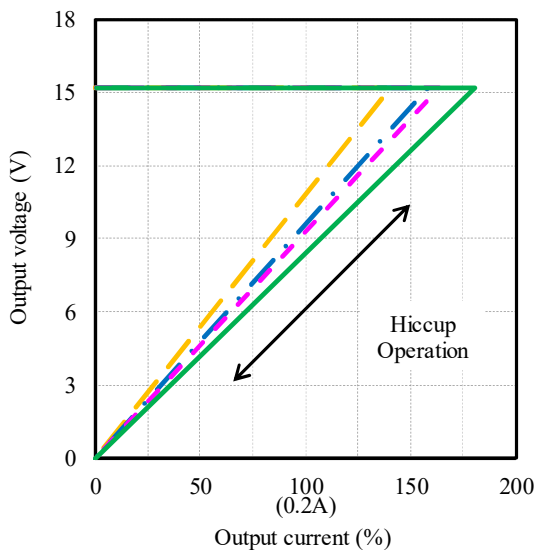



2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions V_{in} : 48 VDC
 I_o : 0 %
 T_a : 25 °C

3.3V

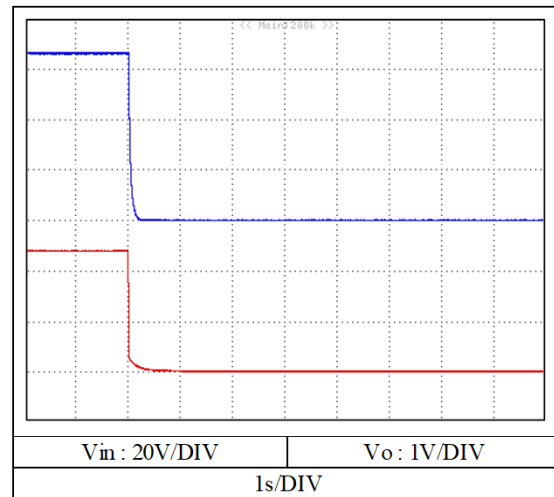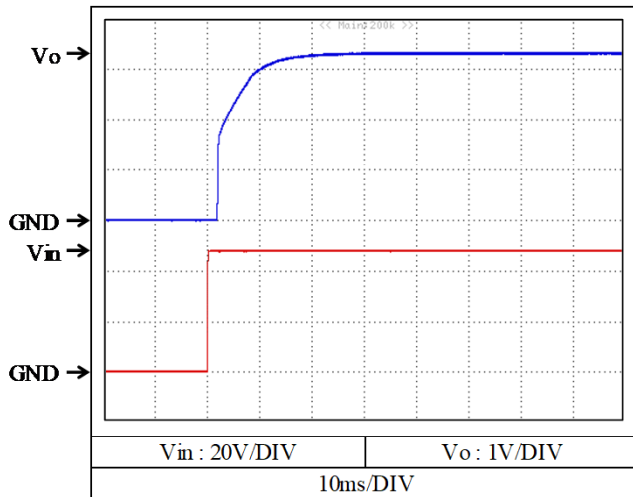



5V

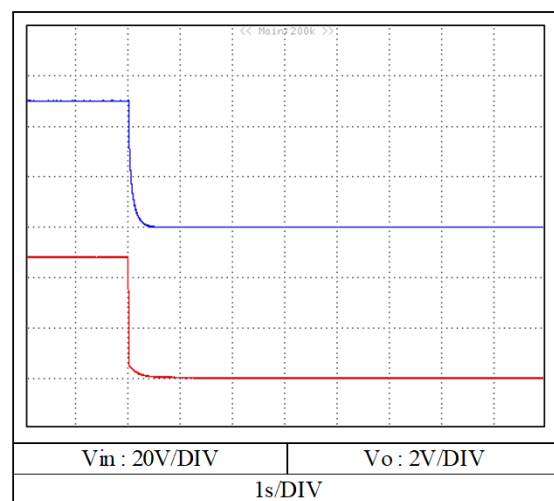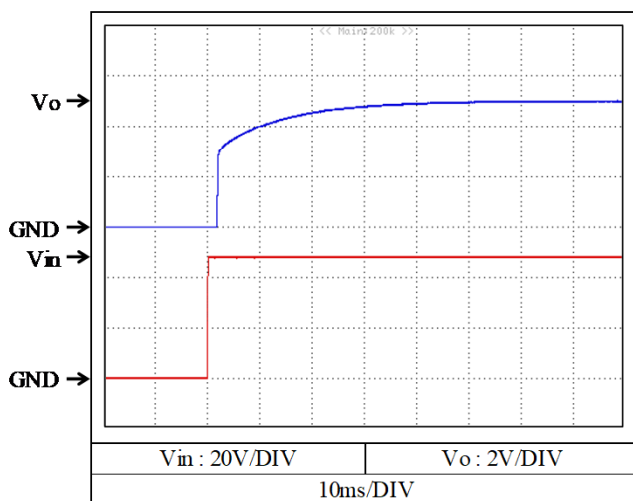



2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions V_{in} : 48 VDC
 I_o : 0 %
 T_a : 25 °C

12V

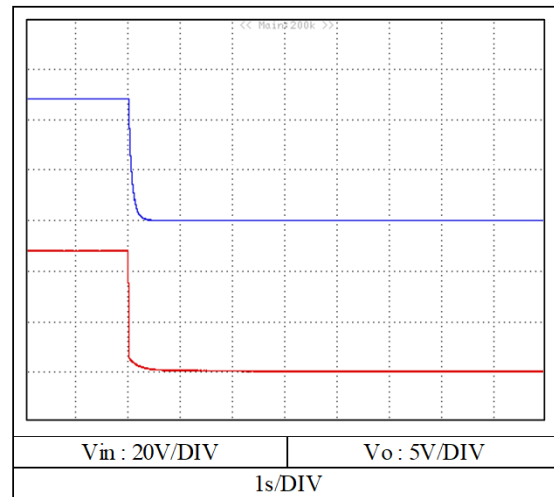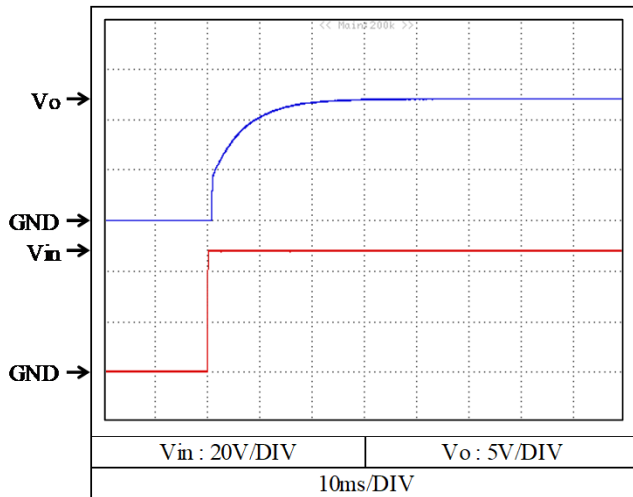



15V

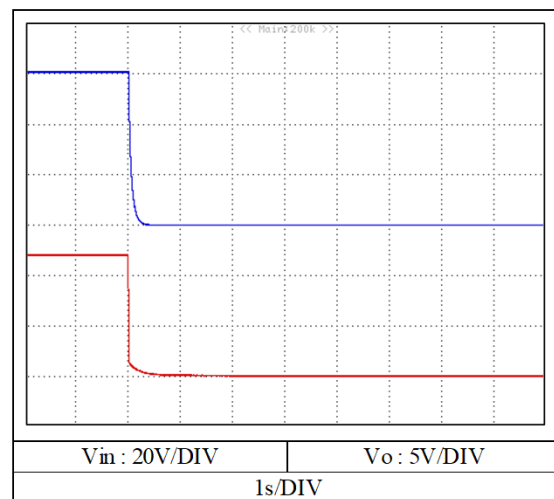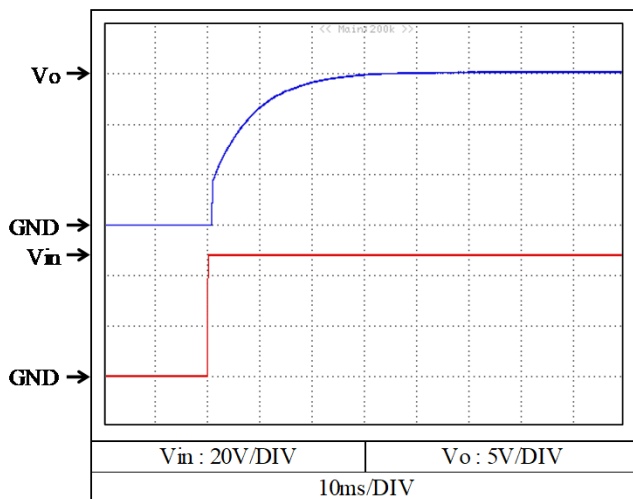



2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions V_{in} : 48 VDC
 I_o : 100 %
 T_a : 25 °C

3.3V

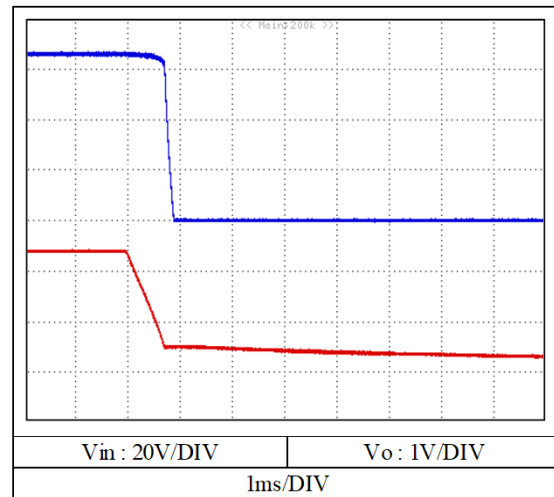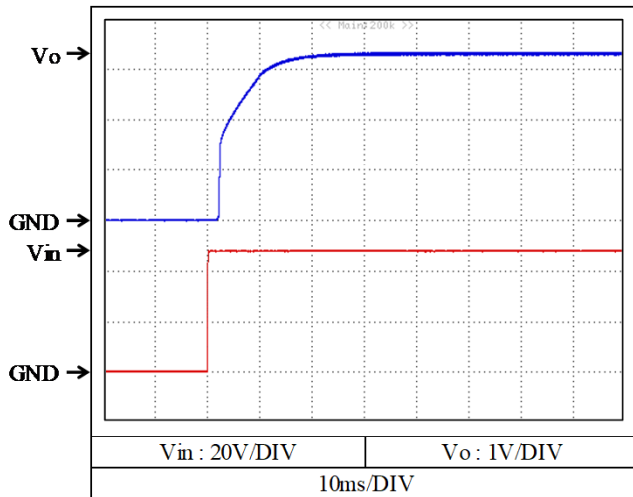



5V

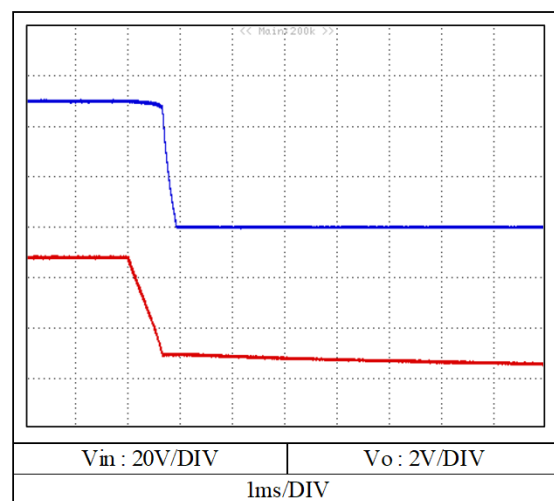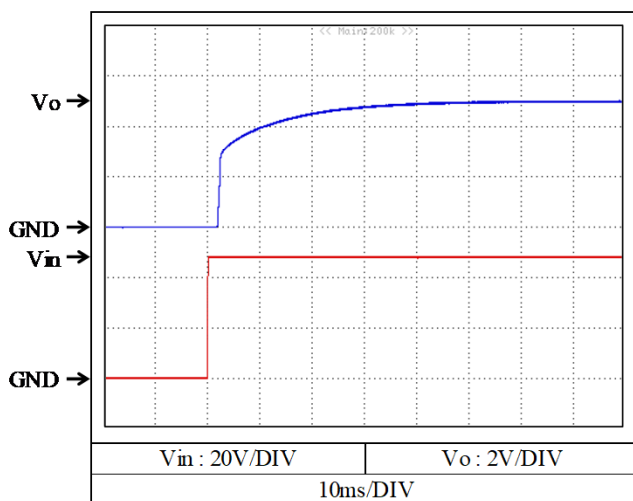



2-5. 出力立ち上がり・立ち下がり特性 Output rise and fall characteristics

Conditions V_{in} : 48 VDC
 I_o : 100 %
 T_a : 25 °C

12V

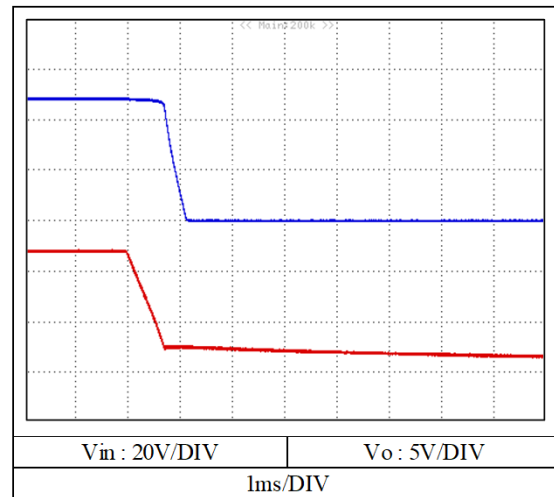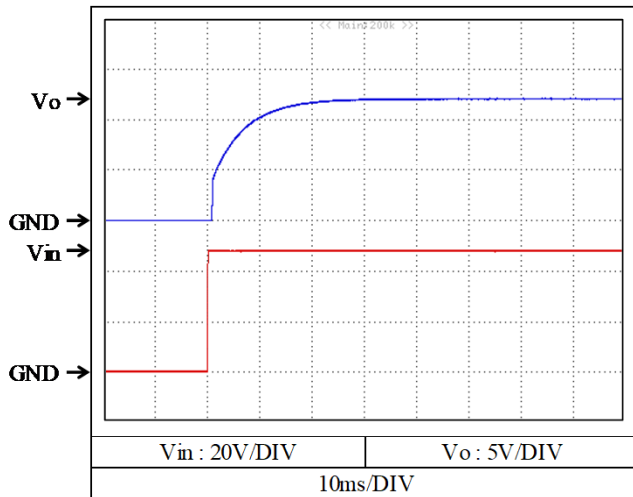

15V

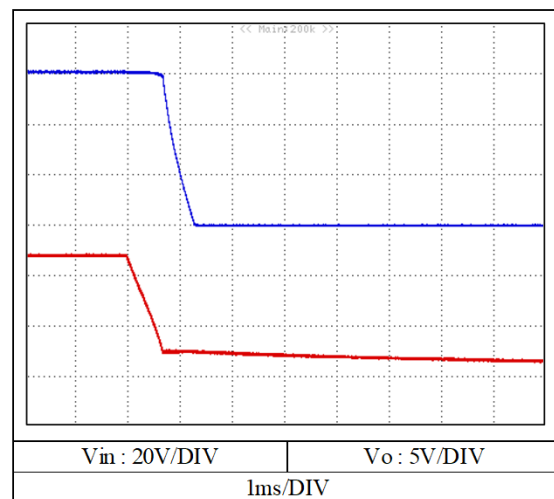
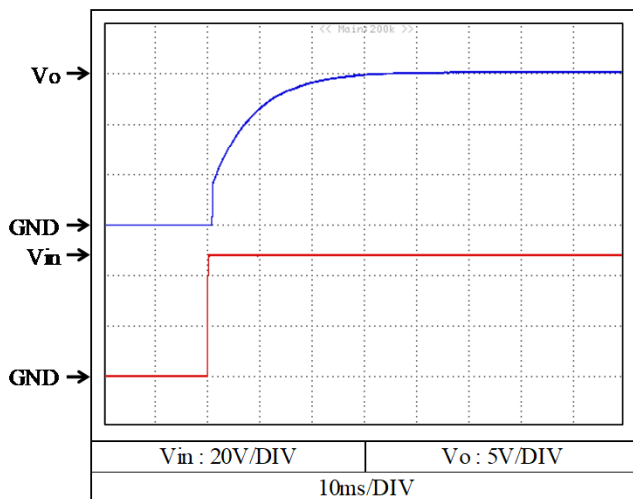


2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions V_{in} : 48 VDC
 I_o : 0 %
 T_a : 25 °C

3.3V

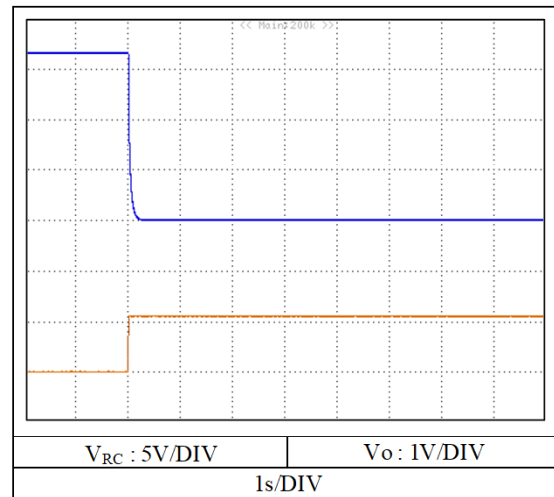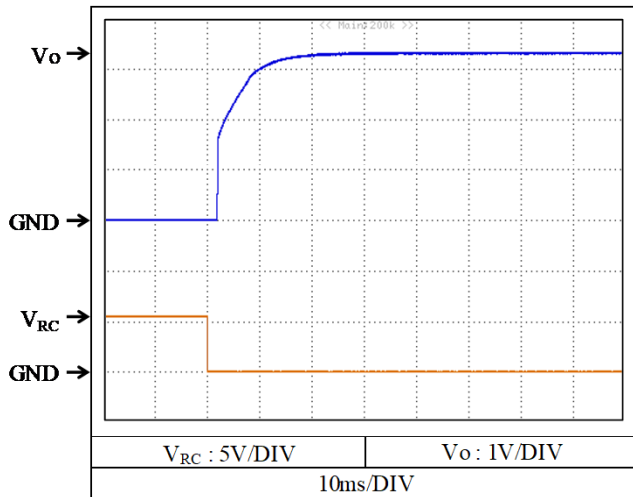

5V

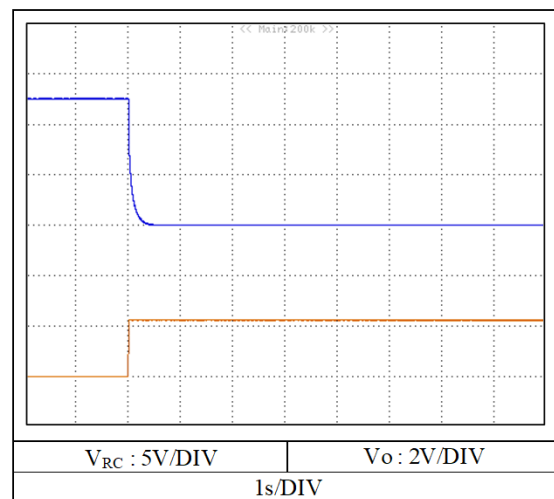
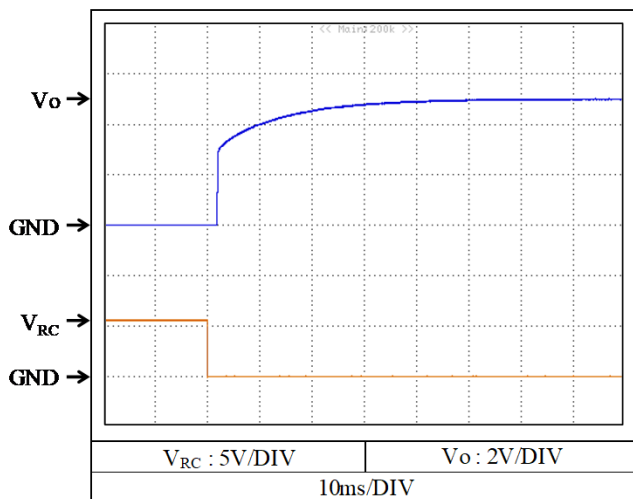


2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions V_{in} : 48 VDC
 I_o : 0 %
 T_a : 25 °C

12V

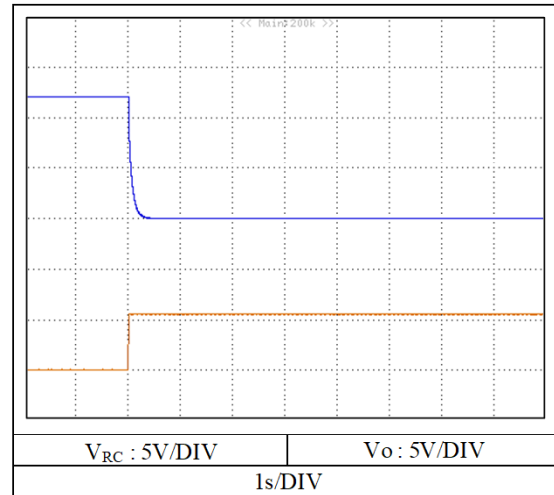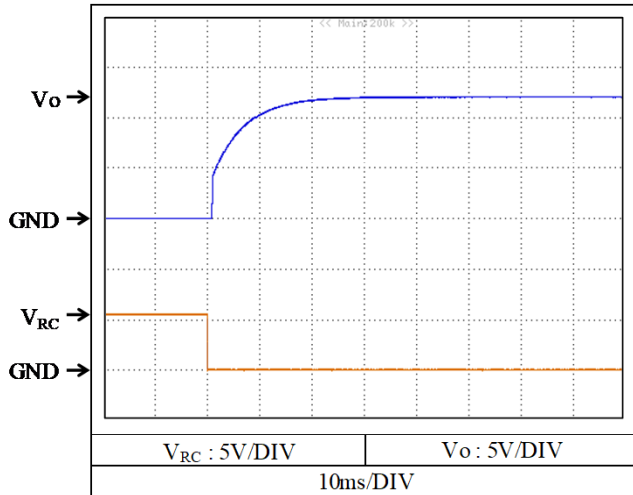

15V

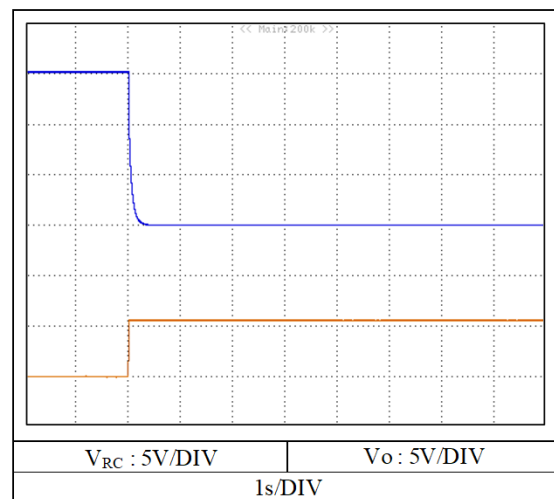
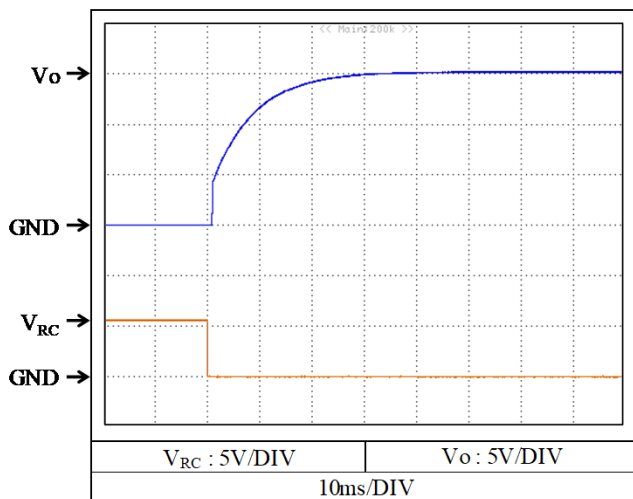


2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)



Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions V_{in} : 48 VDC
 I_o : 100 %
 T_a : 25 °C

3.3V

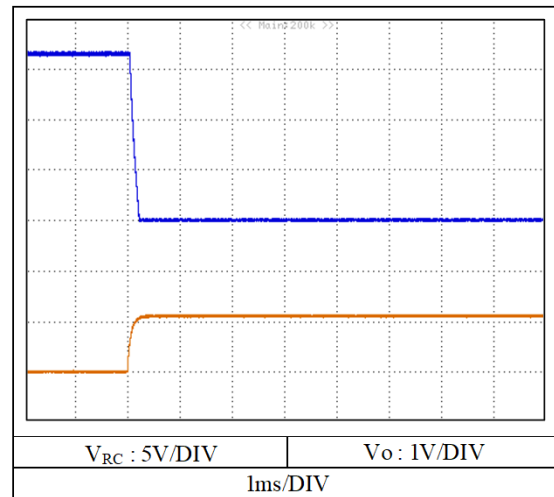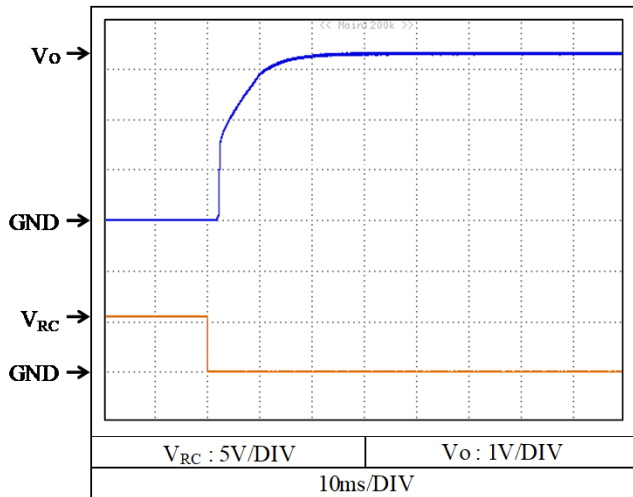

5V

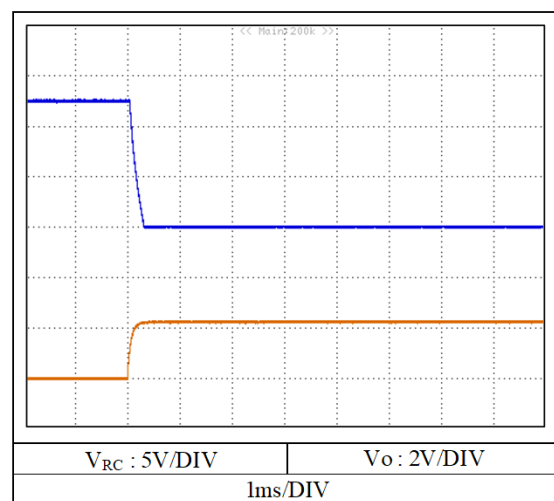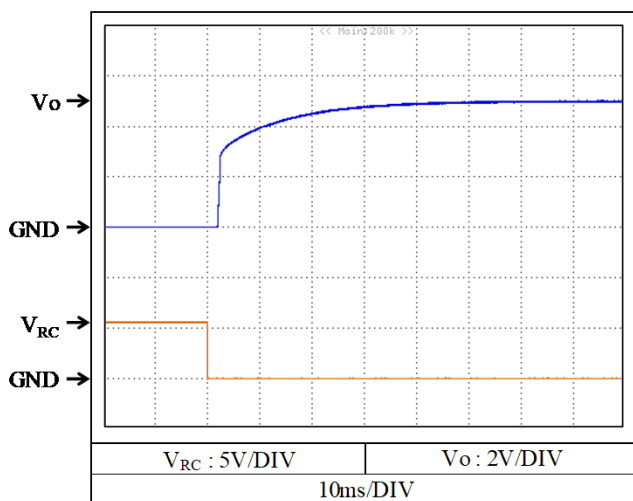


2-5. 出力立ち上がり・立ち下がり特性 (リモートON/OFFコントロール時)


Output rise and fall characteristics with REMOTE ON/OFF CONTROL

Conditions V_{in} : 48 VDC
 I_o : 100 %
 T_a : 25 °C

12V

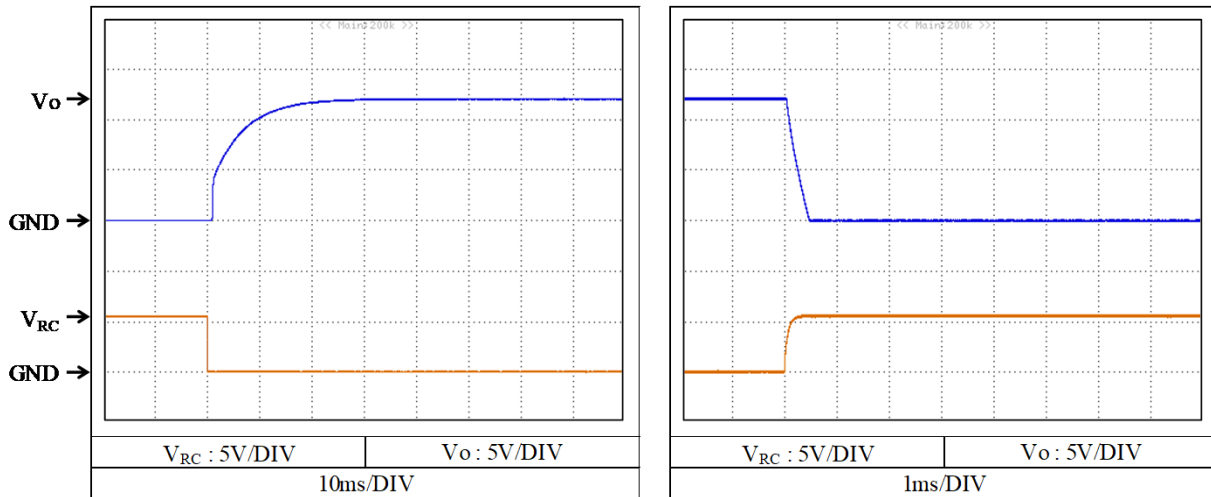


15V

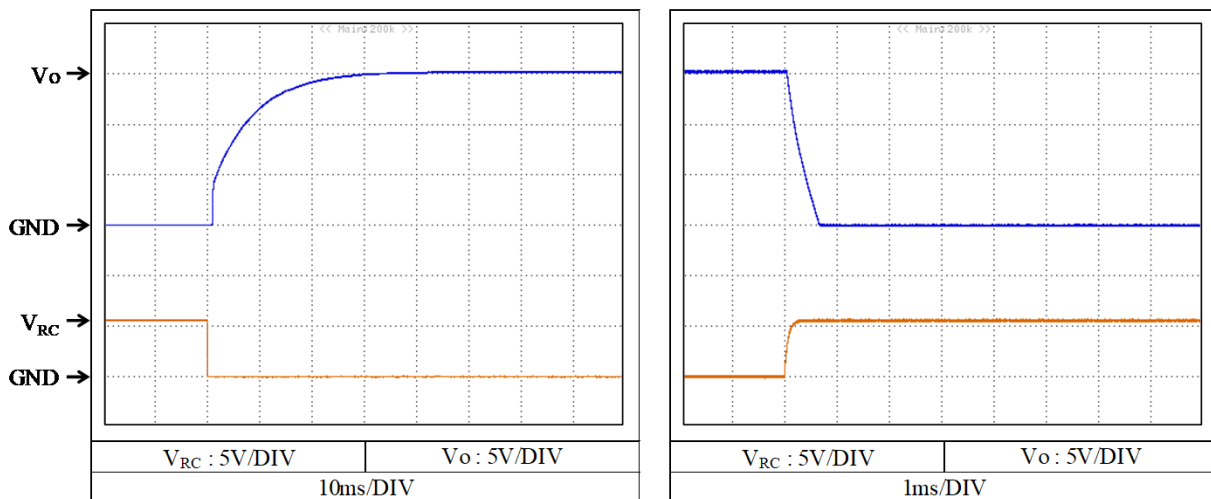


2-6. 過渡応答(負荷急変)特性 Dynamic load response characteristics

Conditions V_{in} : 48 VDC
 T_a : 25 °C


3.3V

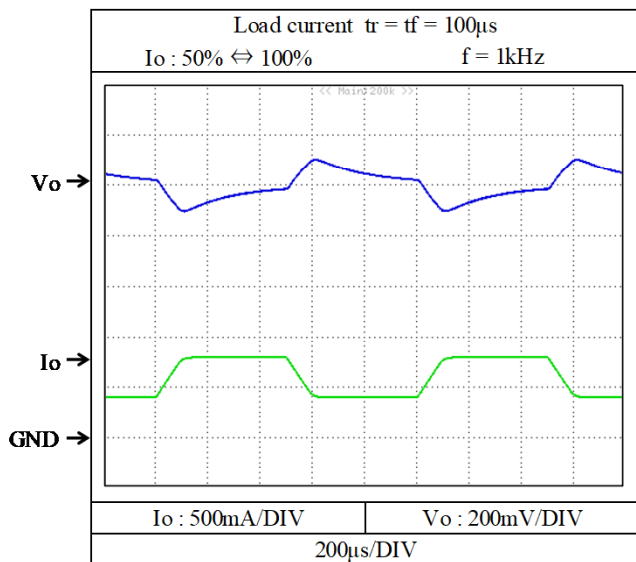


5V

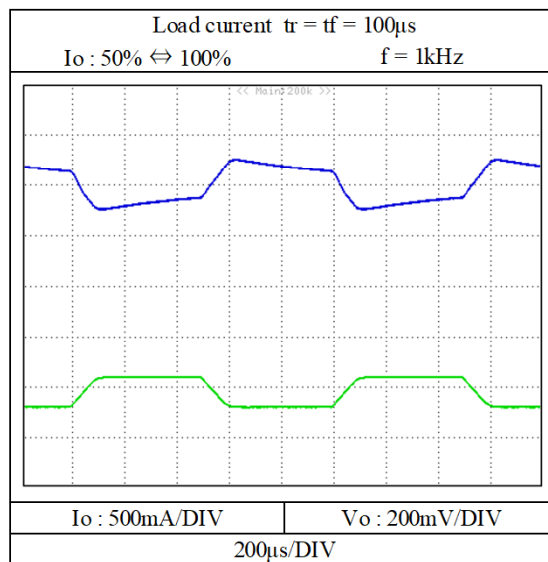

12V

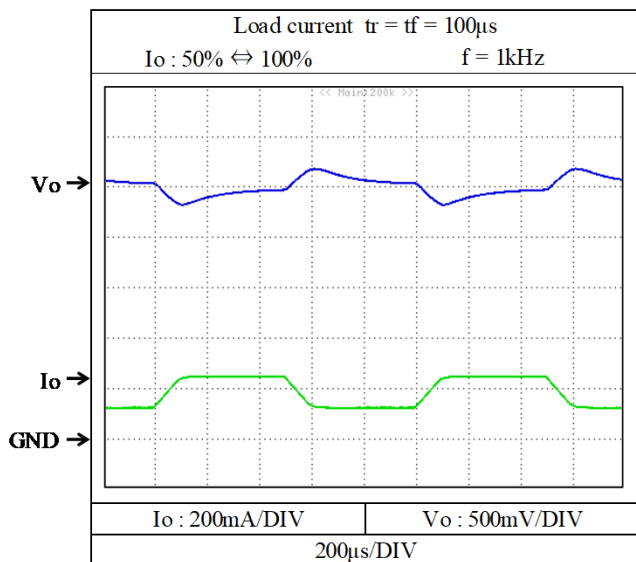


15V

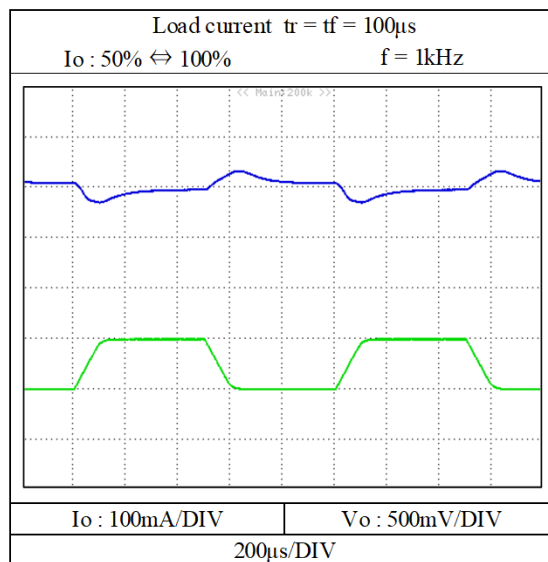

2-7. 入力サージ電流(突入電流)特性 Inrush current characteristics

Conditions V_{in} : 48 VDC
 I_o : 100 %
 T_a : 25 °C

5V

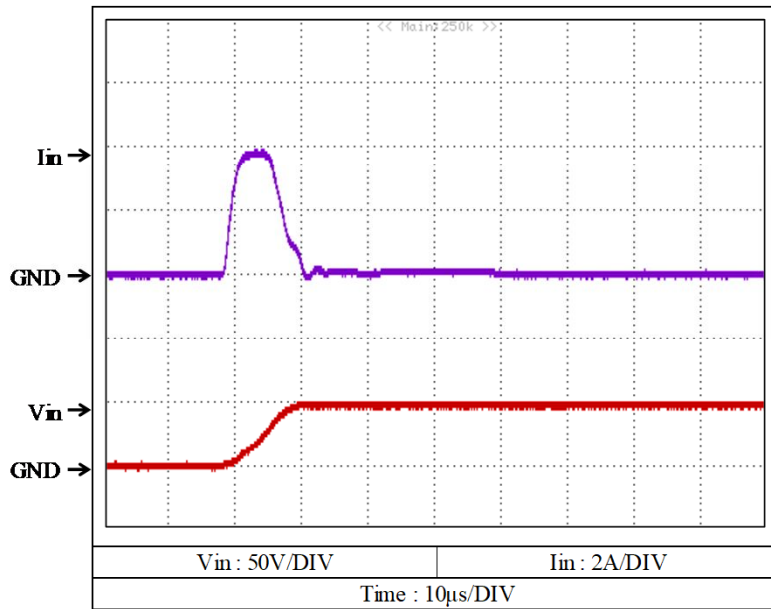


CCG3-48-xxSの入力サージ電流特性は CCG3-48-05S と同等です。
 CCG3-48-xxS have the same Inrush current characteristics as CCG3-48-05S data.


2-8. 出力リップルノイズ波形 Output ripple and noise waveform

Conditions V_{in} : 48 VDC
 I_o : 100 %
 T_a : 25 °C


3.3V

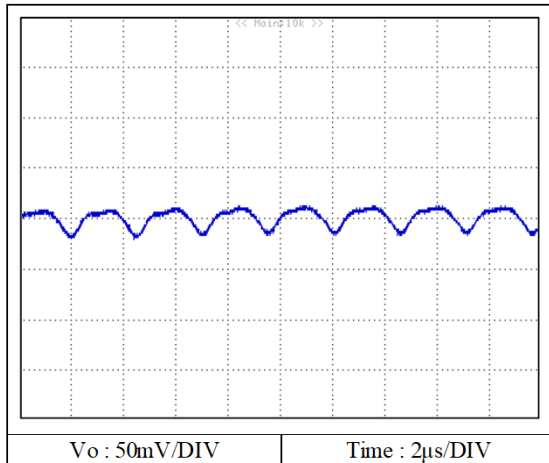


5V

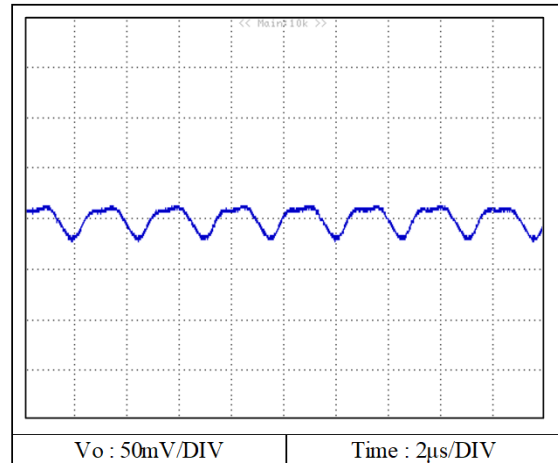

12V

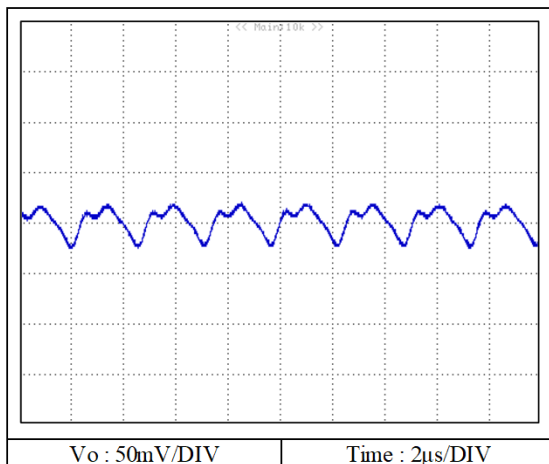



15V

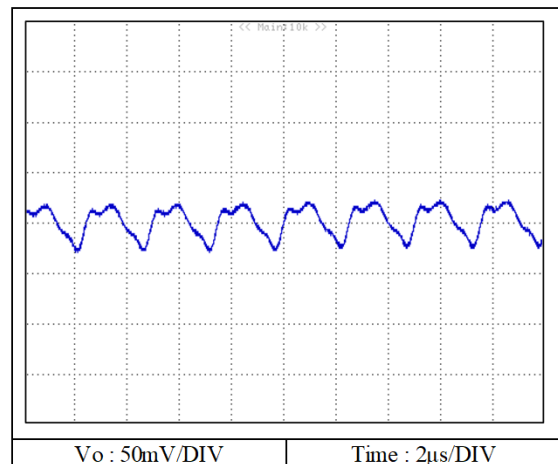

2-9. EMI特性 Electro-Magnetic Interference characteristics

(a) 雑音端子電圧 (帰還ノイズ) Conducted Emission Noise

Conditions Vin : 48 VDC
Io : 100 %
Ta : 25 °C

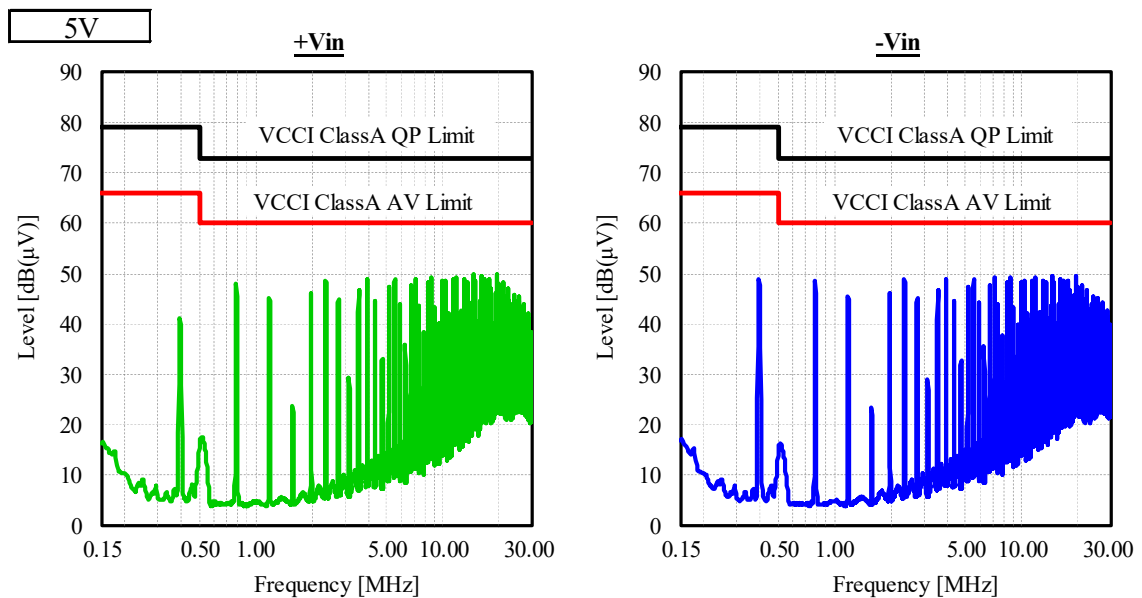
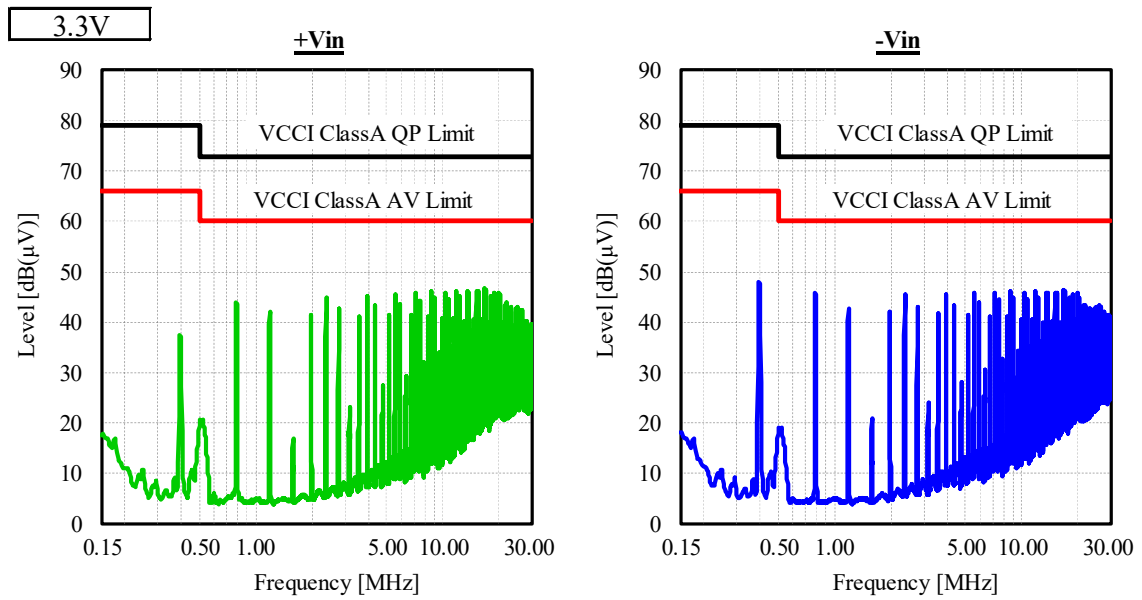


表示はQP値
Indication is QP values.

2-9. EMI特性 Electro-Magnetic Interference characteristics

(a) 雑音端子電圧 (帰還ノイズ) Conducted Emission Noise





Conditions Vin : 48 VDC
 Io : 100 %
 Ta : 25 °C

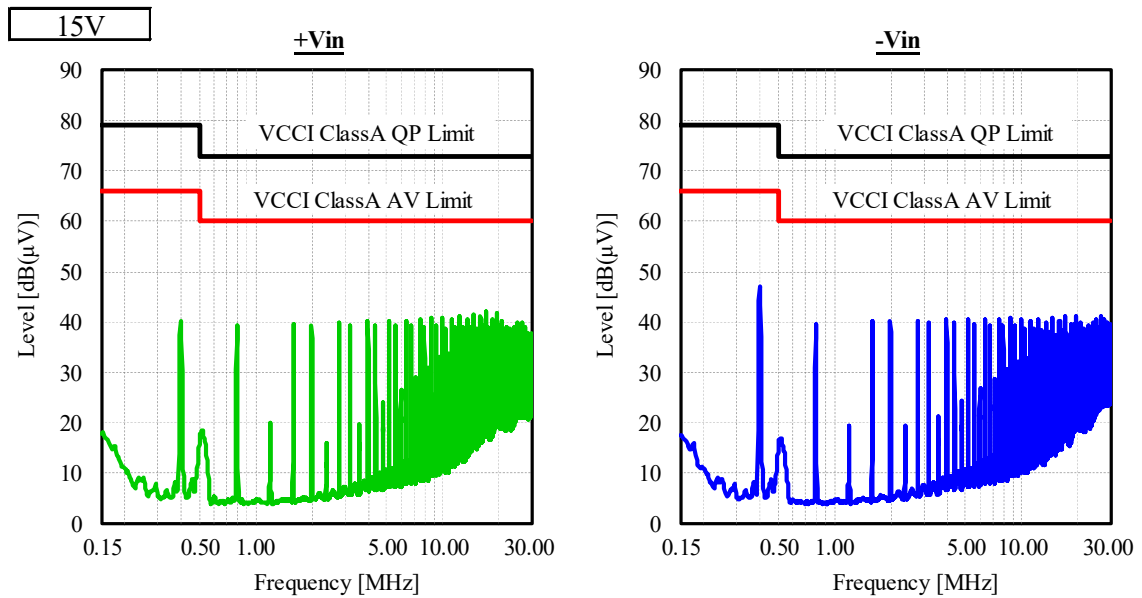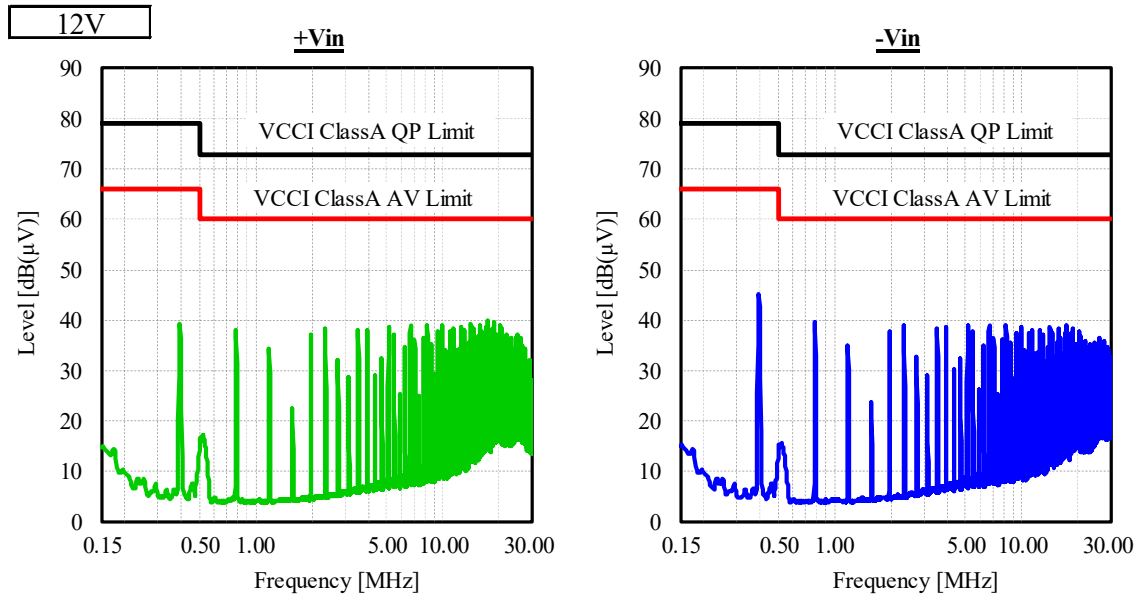

表示はQP値
 Indication is QP values.

2-9. EMI特性 Electro-Magnetic Interference characteristics
 (b) 雑音電界強度 (輻射ノイズ) Radiated Emission Noise





Conditions Vin : 48 VDC
 Io : 100 %
 Ta : 25 °C

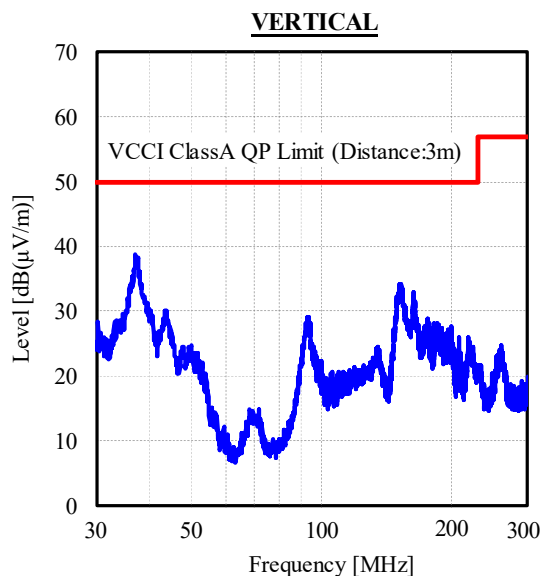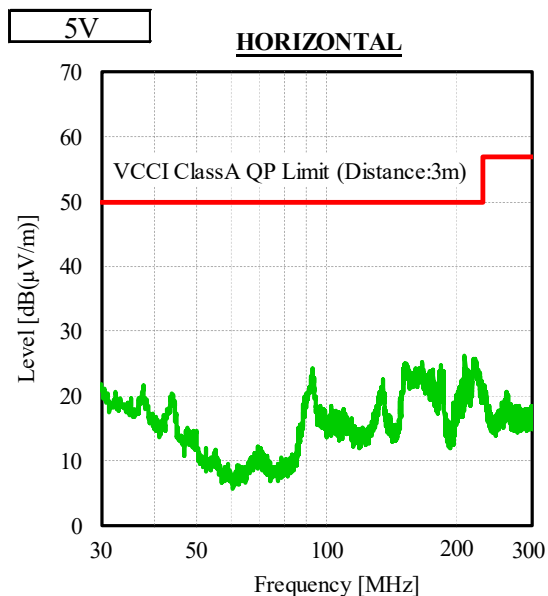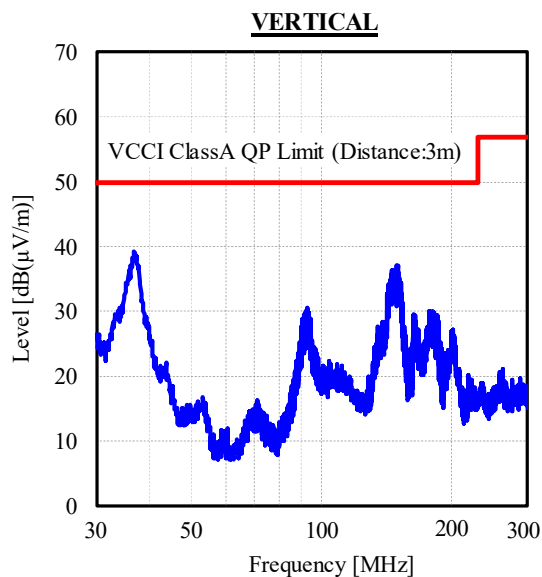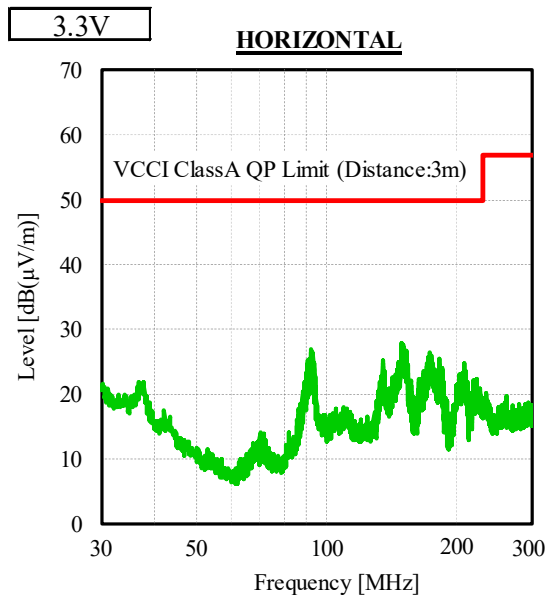

表示はピーク値
 Indication is peak values.

2-9. EMI特性 Electro-Magnetic Interference characteristics
 (b) 雑音電界強度 (輻射ノイズ) Radiated Emission Noise

Conditions Vin : 48 VDC
 Io : 100 %
 Ta : 25 °C

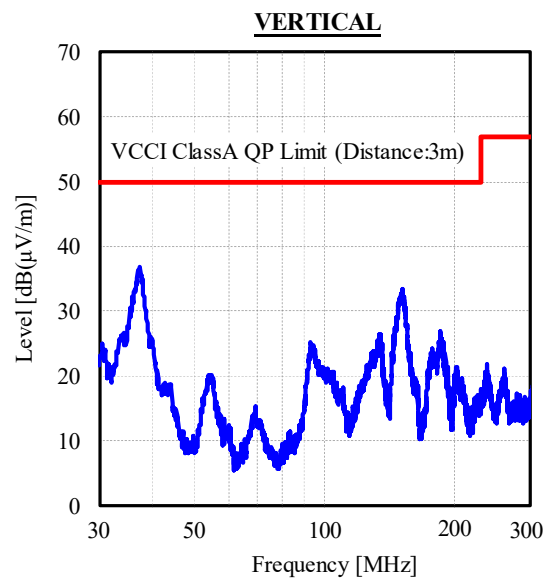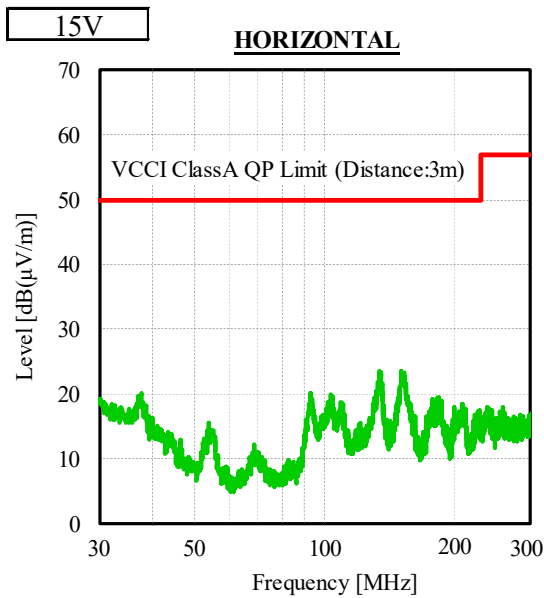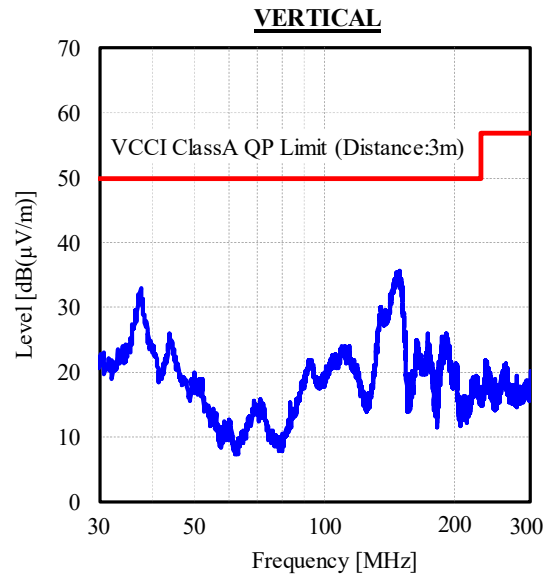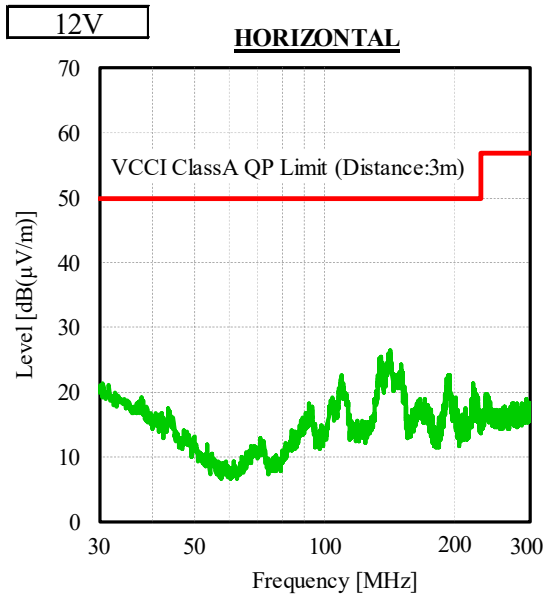

表示はピーク値
 Indication is peak values.