

C1005X8R1C473K050BE

TDK Item Description : C1005X8R1C473KT***S




Application & Main Feature

Commercial Grade (Soft Termination)

Series

C1005 [EIA 0402]

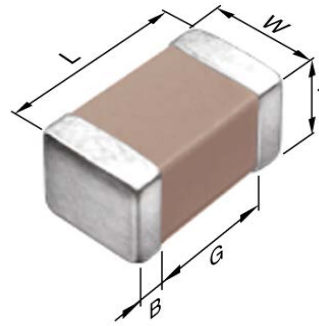

Dimensions

L	1.00mm +0.15,-0.05mm
W	0.50mm +0.1,-0.05mm
T	0.50mm +0.1,-0.05mm
B	0.10mm Min.
G	0.30mm Min.

Temperature Characteristic

X8R (-55 to 150 degC ±15%)

Rated Voltage

1C (16Vdc)

Capacitance

47nF

Capacitance Tolerance

K (+/-10%)

Dissipation Factor

5% Max.


Insulation Resistance

2.127Gohm Min


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics (Simulation Data)

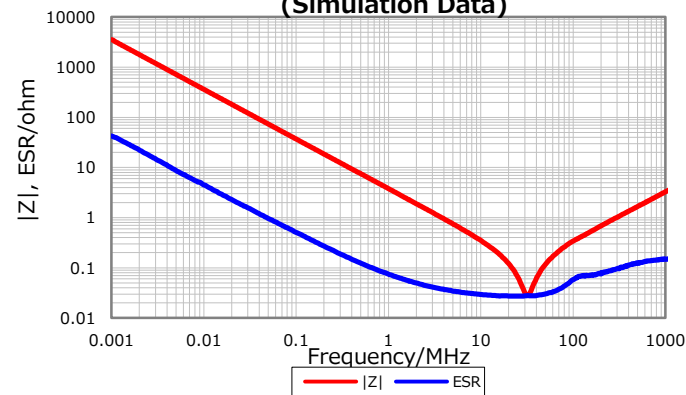


Cap. vs. Freq. Characteristic

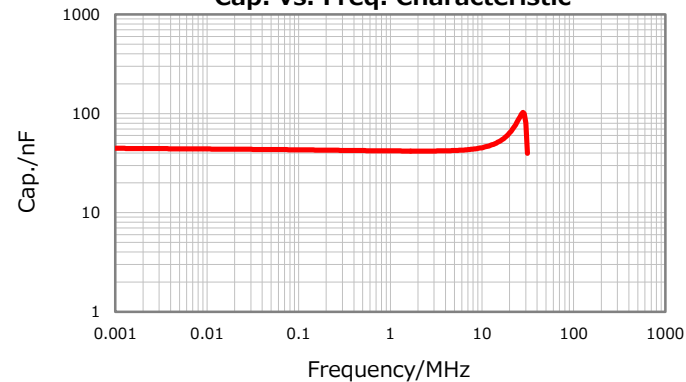


DC Bias Characteristic

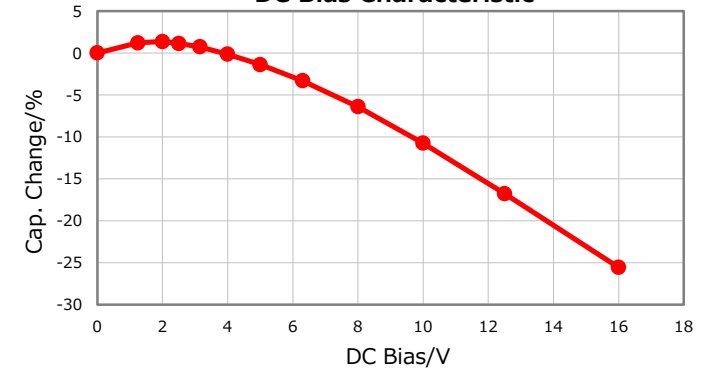

Temperature Characteristics

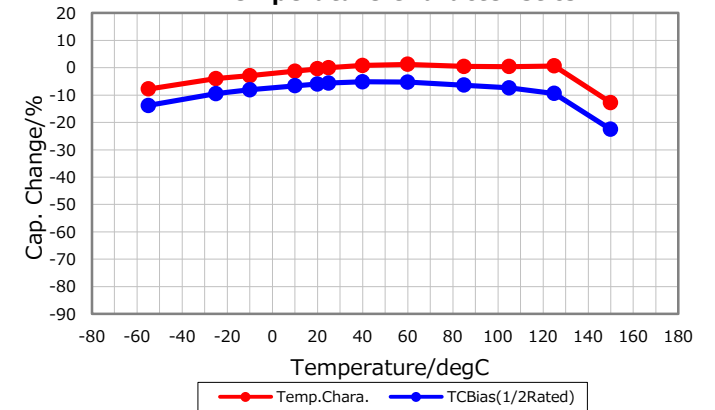

Ripple Temperature Rise Characteristics

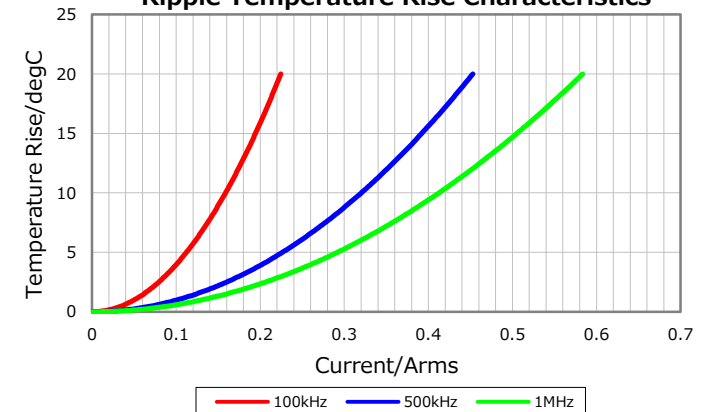

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

July 26, 2018