

C1608X8R1E224M080AB

TDK Item Description : C1608X8R1E224MT****




Application & Main Feature

Commercial Grade (High Temperature Application)

Series

C1608 [EIA 0603]



Dimensions

L	1.60mm +/-0.15mm
W	0.80mm +/-0.15mm
T	0.80mm +/-0.15mm
B	0.20mm Min.
G	0.30mm Min.

Temperature Characteristic

X8R (-55 to 150 deg +/-15%)

Rated Voltage

1E (25Vdc)

Capacitance

220nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor






3% Max.

Insulation Resistance

2.272Gohm Min

AEC-Q200

Not Applicable

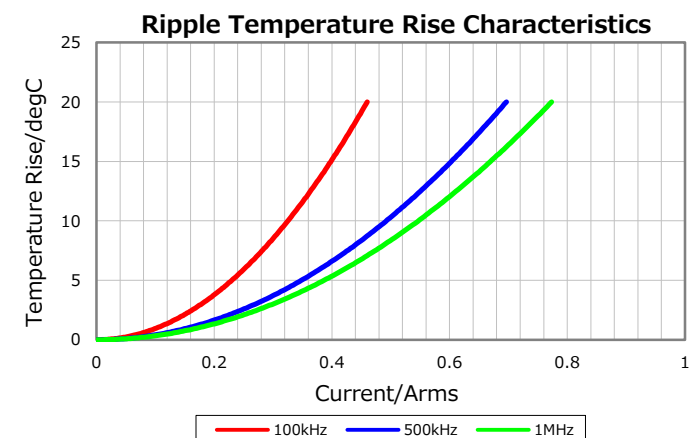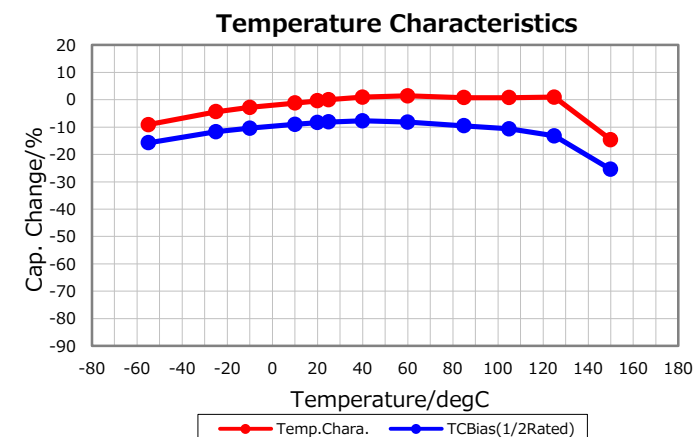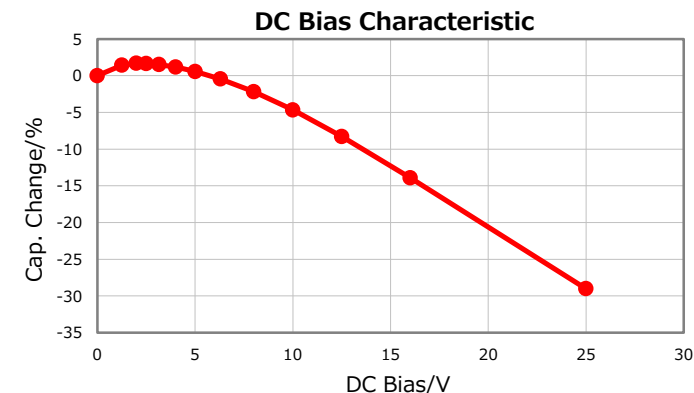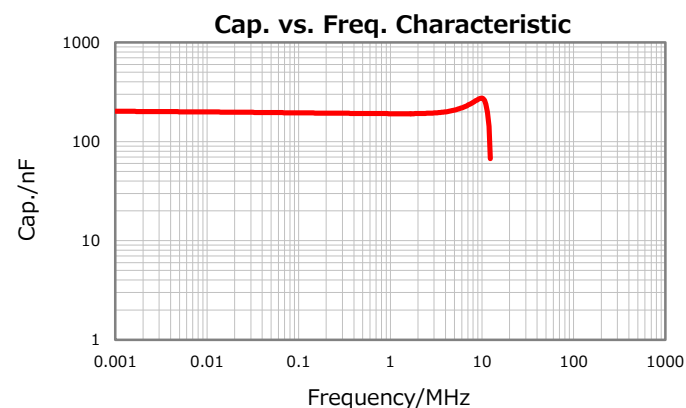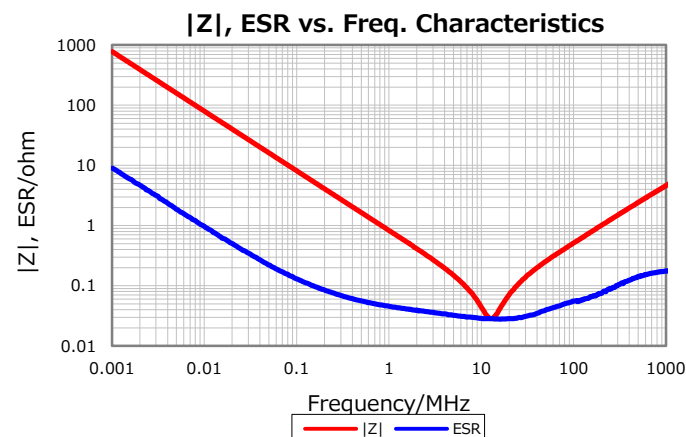

All specifications are subject to change without notice.

June 5, 2018