

C4532CH2J473J320KA

TDK Item Description : C4532CH2J473JT****



Application & Main Feature

Commercial Grade (Mid Voltage (100 to 630V))

Series

C4532 [EIA 1812]



Dimensions

L	4.50mm ±0.40mm
W	3.20mm ±0.40mm
T	3.20mm ±0.30mm
B	0.20mm Min.
G	

Temperature Characteristic

CH (-25 to 85 degC 0+/-60ppm/degC)

Rated Voltage

2J(630Vdc)

Capacitance

47nF

Capacitance Tolerance

J (±5%)

Q Factor

1000 Min.


Insulation Resistance

10Gohm Min


AEC-Q200

Not Applicable


|Z|, ESR vs. Freq. Characteristics

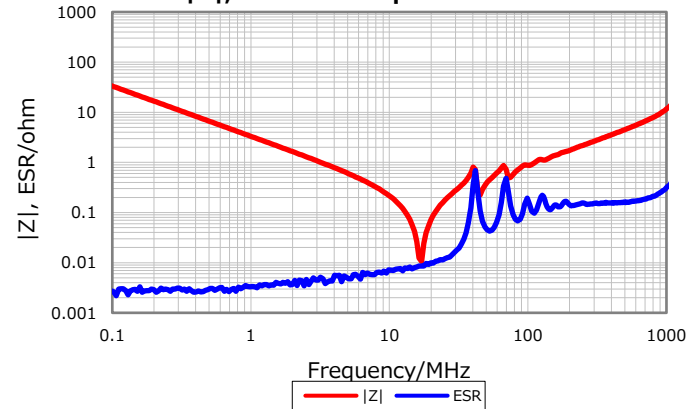


Cap. vs. Freq. Characteristic

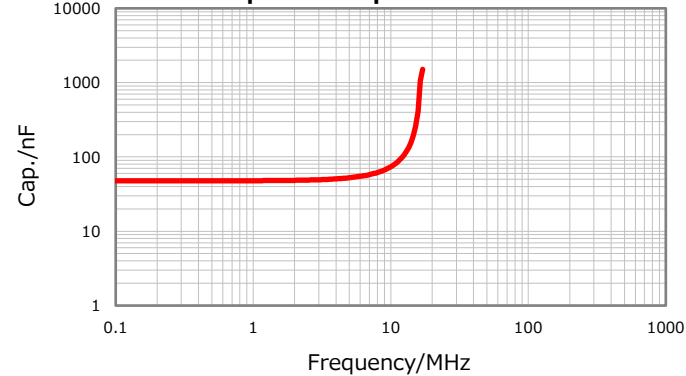

DC Bias Characteristic

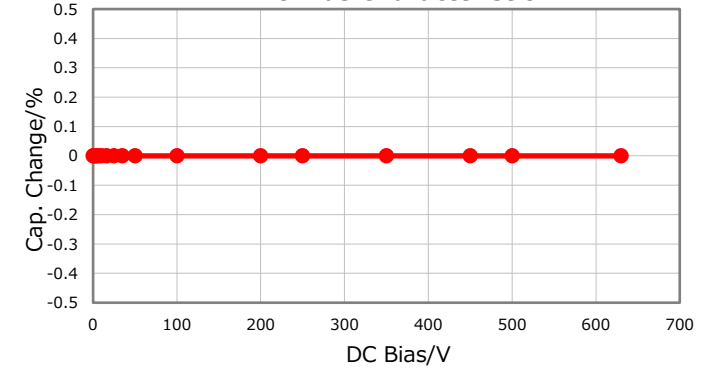

Temperature Characteristics

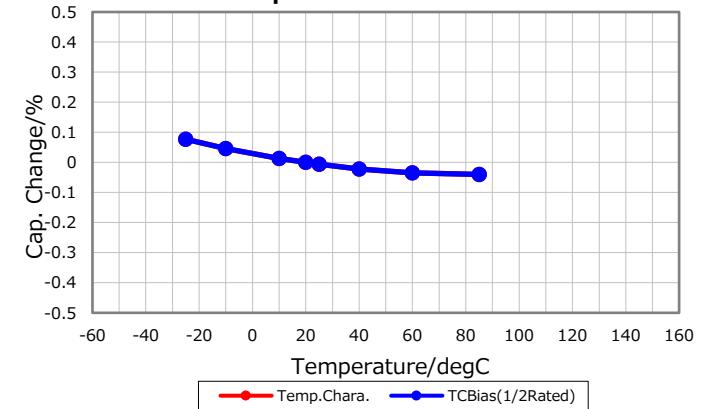

Ripple Temperature Rise Characteristics

