

# C5750C0G3A333J280KC

TDK Item Description : C5750C0G3A333J\*\*\*\*



## Application & Main Feature

Commercial Grade ( High Voltage (1000V and over) )

## Series

C5750 [EIA 2220]



## Dimensions

|   |                |
|---|----------------|
| L | 5.70mm ±0.40mm |
| W | 5.00mm ±0.40mm |
| T | 2.80mm ±0.30mm |
| B | 0.20mm Min.    |
| G |                |

## Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

## Rated Voltage

3A(1000Vdc)

## Capacitance

33nF

## Capacitance Tolerance

J (±5%)

## Q Factor






1000 Min.

## Insulation Resistance

10Gohm Min

## AEC-Q200

Not Applicable

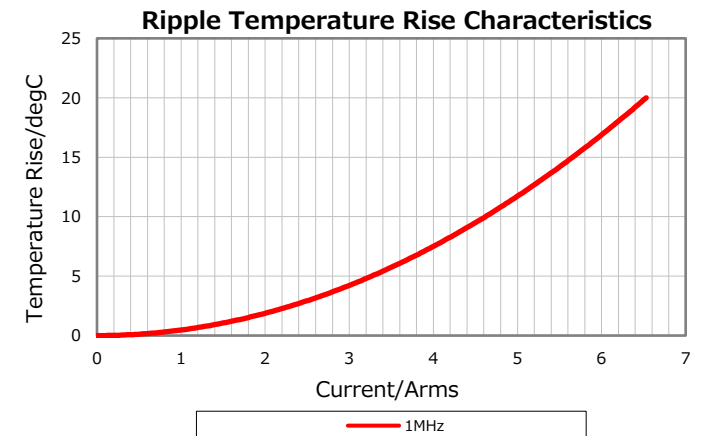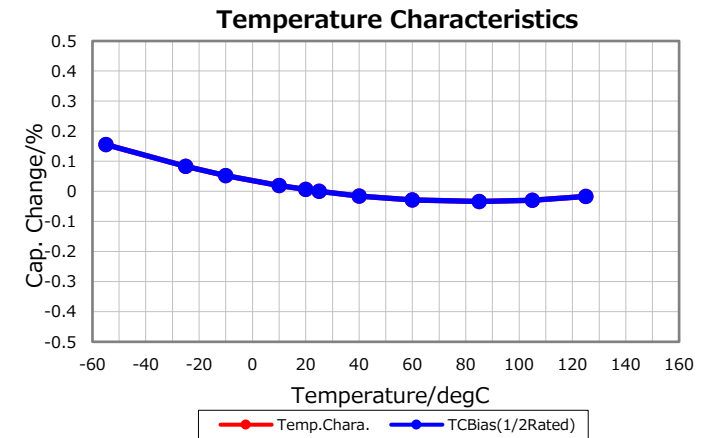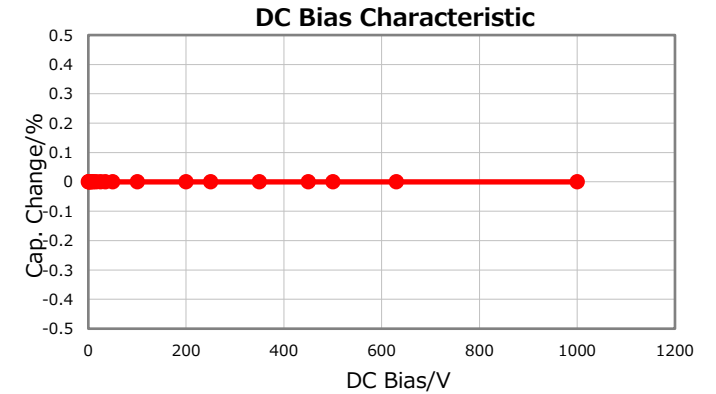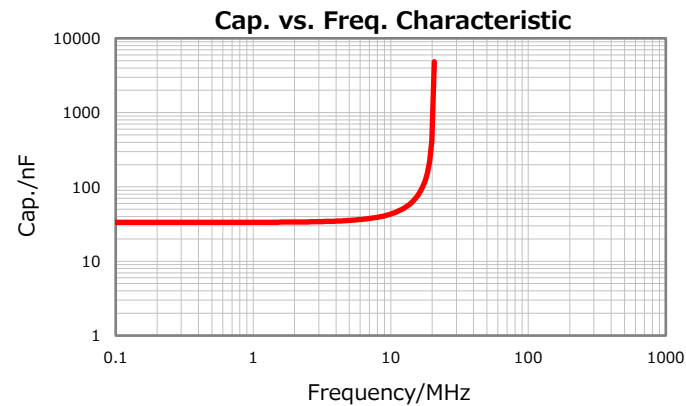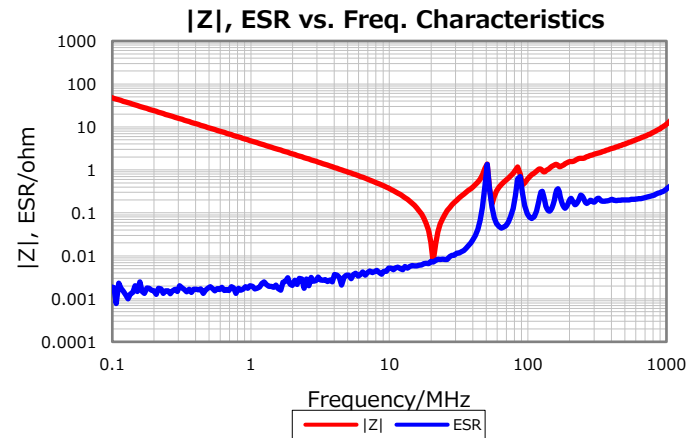

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

May 22, 2019