

# CGA5L2X8R2A154K160AE

TDK Item Description : CGA5L2X8R2A154KT\*\*\*S



Equivalent C3216X8R2A154K for Automotive

## Application & Main Feature

Automotive Grade ( Soft Termination )

## Series

CGA5(3216) [EIA CC1206]



## Dimensions

L	3.20mm +0.4,-0.2mm
W	1.60mm +0.3,-0.2mm
T	1.60mm +0.3,-0.2mm
B	0.20mm Min.
G	1.00mm Min.

## Temperature Characteristic

X8R (-55 to 150 degC +/-15%)

## Rated Voltage

2A (100Vdc)

## Capacitance

150nF

## Capacitance Tolerance

K (+/-10%)

## Dissipation Factor

3% Max.


## Insulation Resistance

3.333Gohm Min


## AEC-Q200

Yes


## |Z|, ESR vs. Freq. Characteristics (Simulation Data)

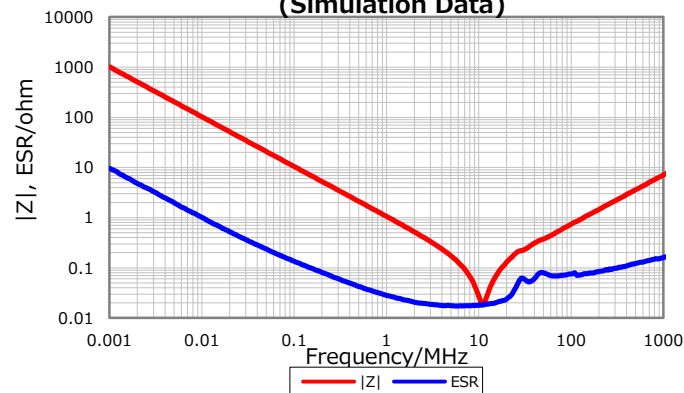


## Cap. vs. Freq. Characteristic

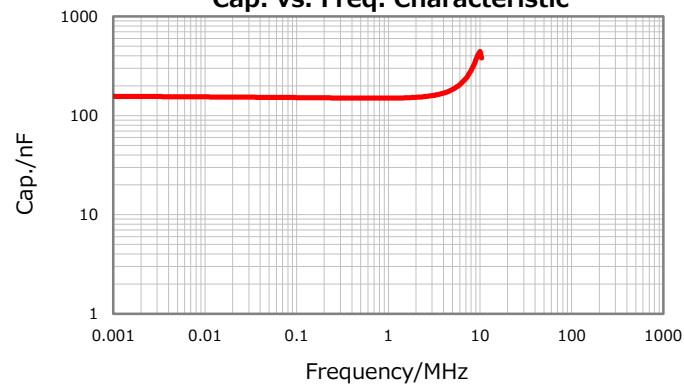


## DC Bias Characteristic

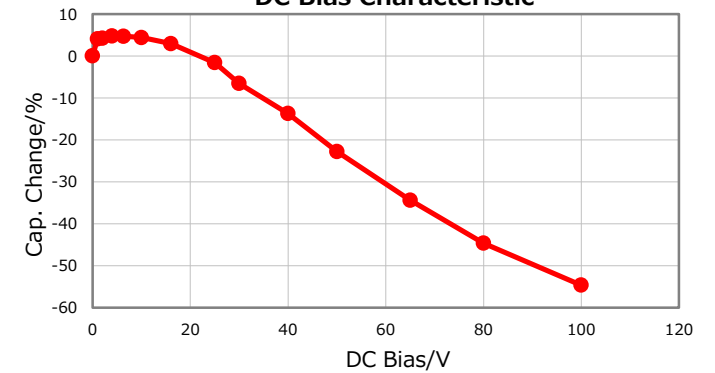

## Temperature Characteristics

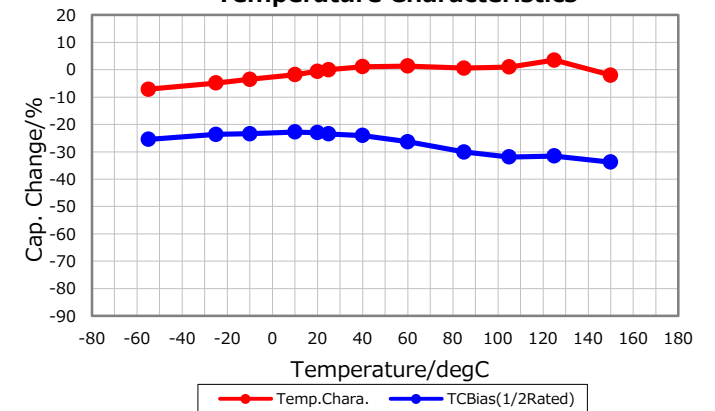

## Ripple Temperature Rise Characteristics

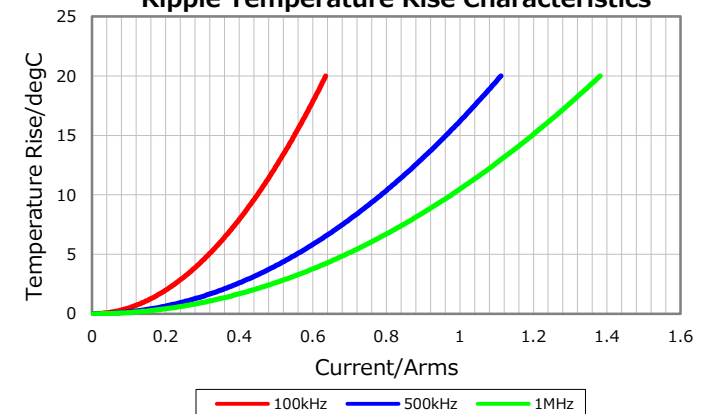

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

March 17, 2017