

CLLC1AX7R0G104M050AC

TDK item description : CLLC1AX7R0G104MT****




Application & Main Feature

Commercial grade (Ultra Low Inductance)

Series

CLLC(1608) [EIA 0603]

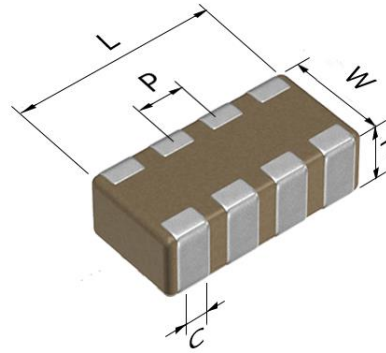

Dimensions

L 1.60±0.10 mm
 W 0.80±0.10 mm
 T 0.50+0.05,-0.10 mm
 P 0.40 mm Nom.
 C 0.25 mm Nom.

Temperature Characteristic

X7R (-55 to +125 degC, ±15%)

Rated Voltage

0G (4Vdc)

Capacitance

100nF

Capacitance Tolerance

M (±20%)

DF

10 % max.






Insulation Resistance

1000 Mohm min.

AEC-Q200

Not Applicable

Characterization Sheet (Multilayer Ceramic Chip Capacitors)

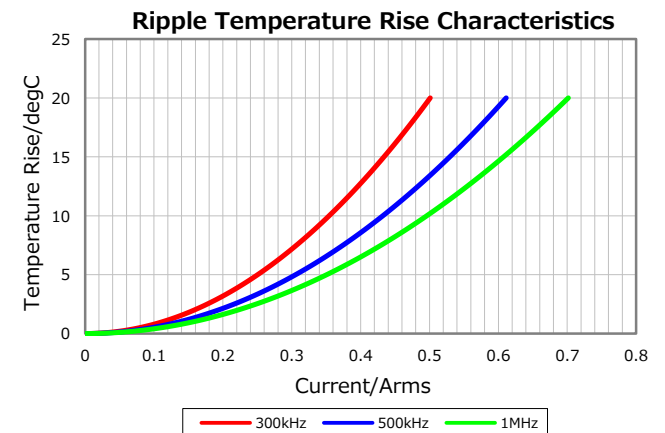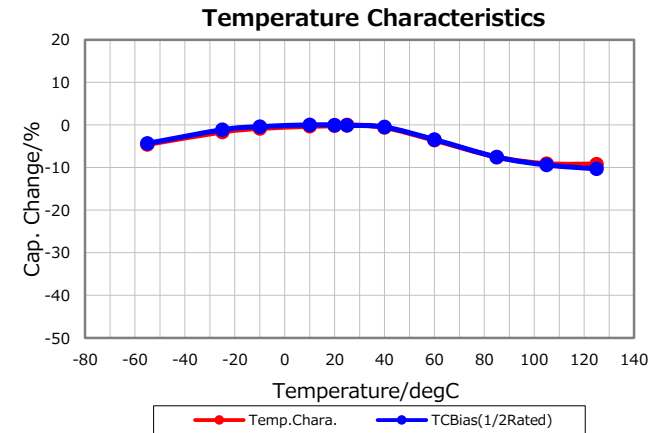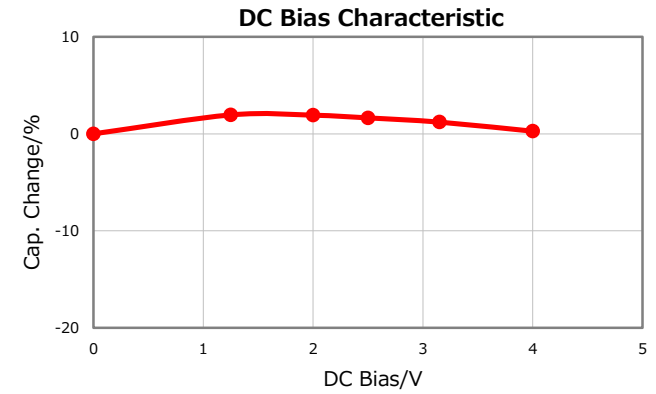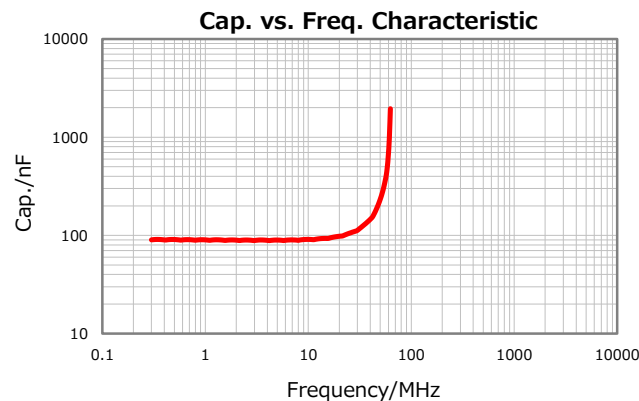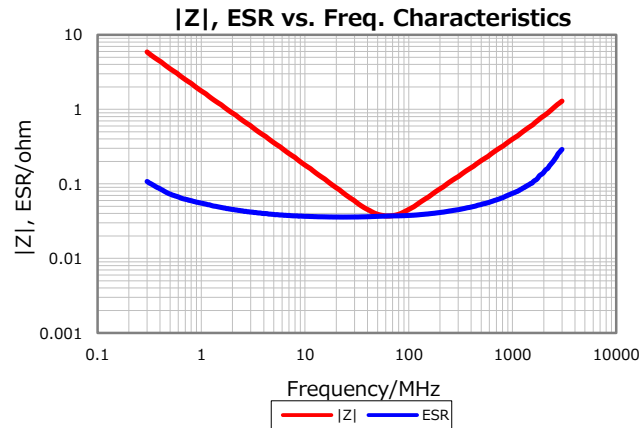

⚠ All specifications are subject to change without notice.

January 8, 2021