

# CNA5L1X7S1A226M160AE

TDK item description : CNA5L1X7S1A226MT\*\*\*A




## Application & Main Feature

Automotive grade (Soft termination (Low resistance))

## Series

CNA5(3216) [EIA 1206]

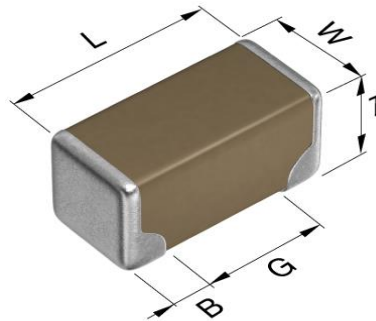

## Dimensions

L 3.20+0.30,-0.20 mm  
 W 1.60+0.30,-0.20 mm  
 T 1.60+0.30,-0.20 mm  
 B 0.30 mm min.  
 G 1.00 mm min.

## Temperature Characteristic

X7S (-55 to +125 degC, ±22%)

## Rated Voltage

1A (10Vdc)

## Capacitance

22µF

## Capacitance Tolerance

M (±20%)

## DF






7.5 % max.

## Insulation Resistance

4 Mohm min.

## AEC-Q200

Yes

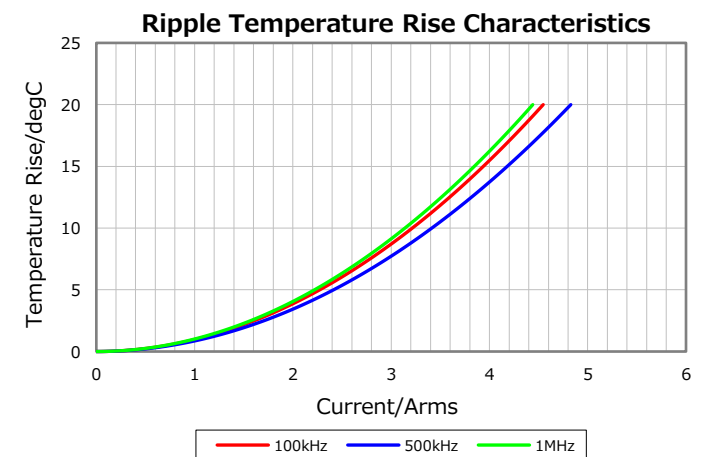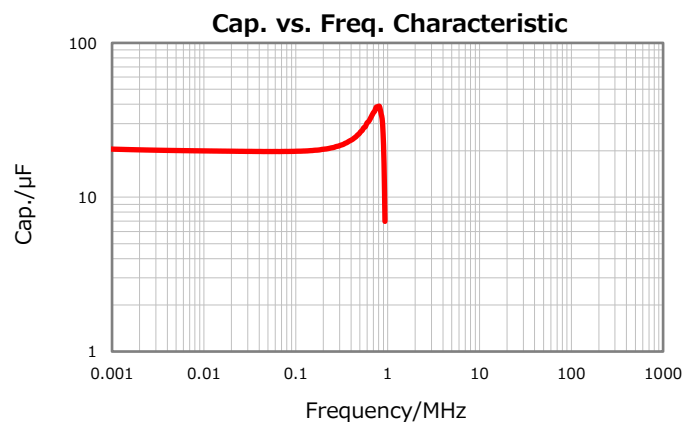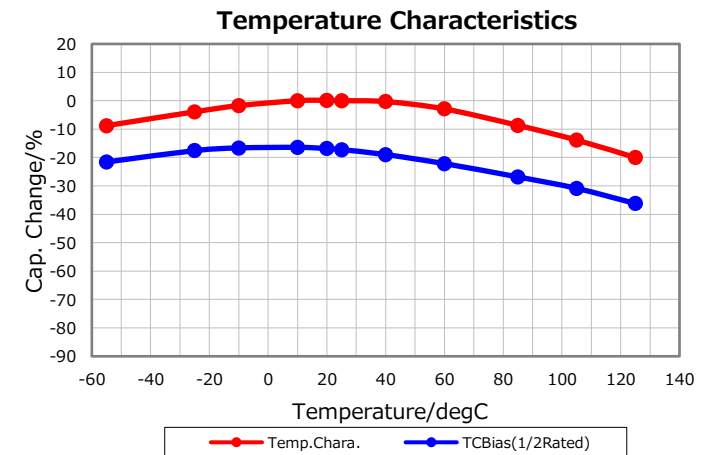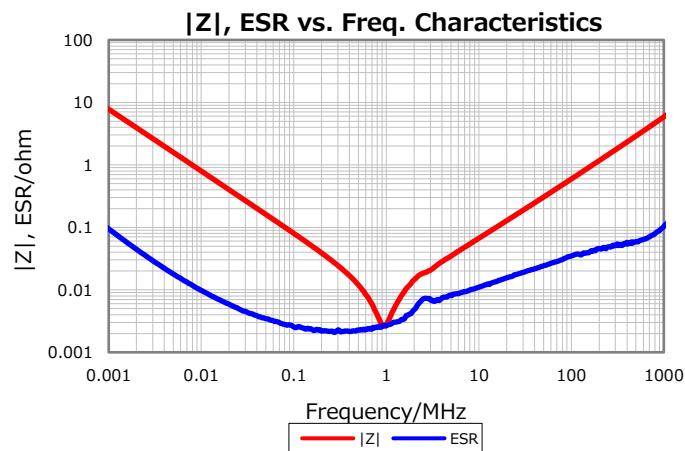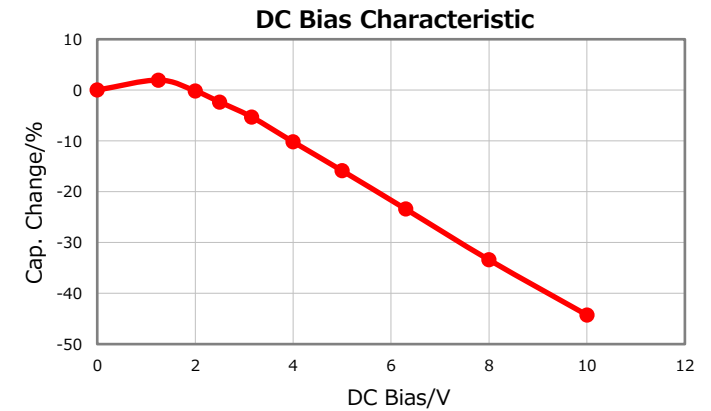

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

October 12, 2022