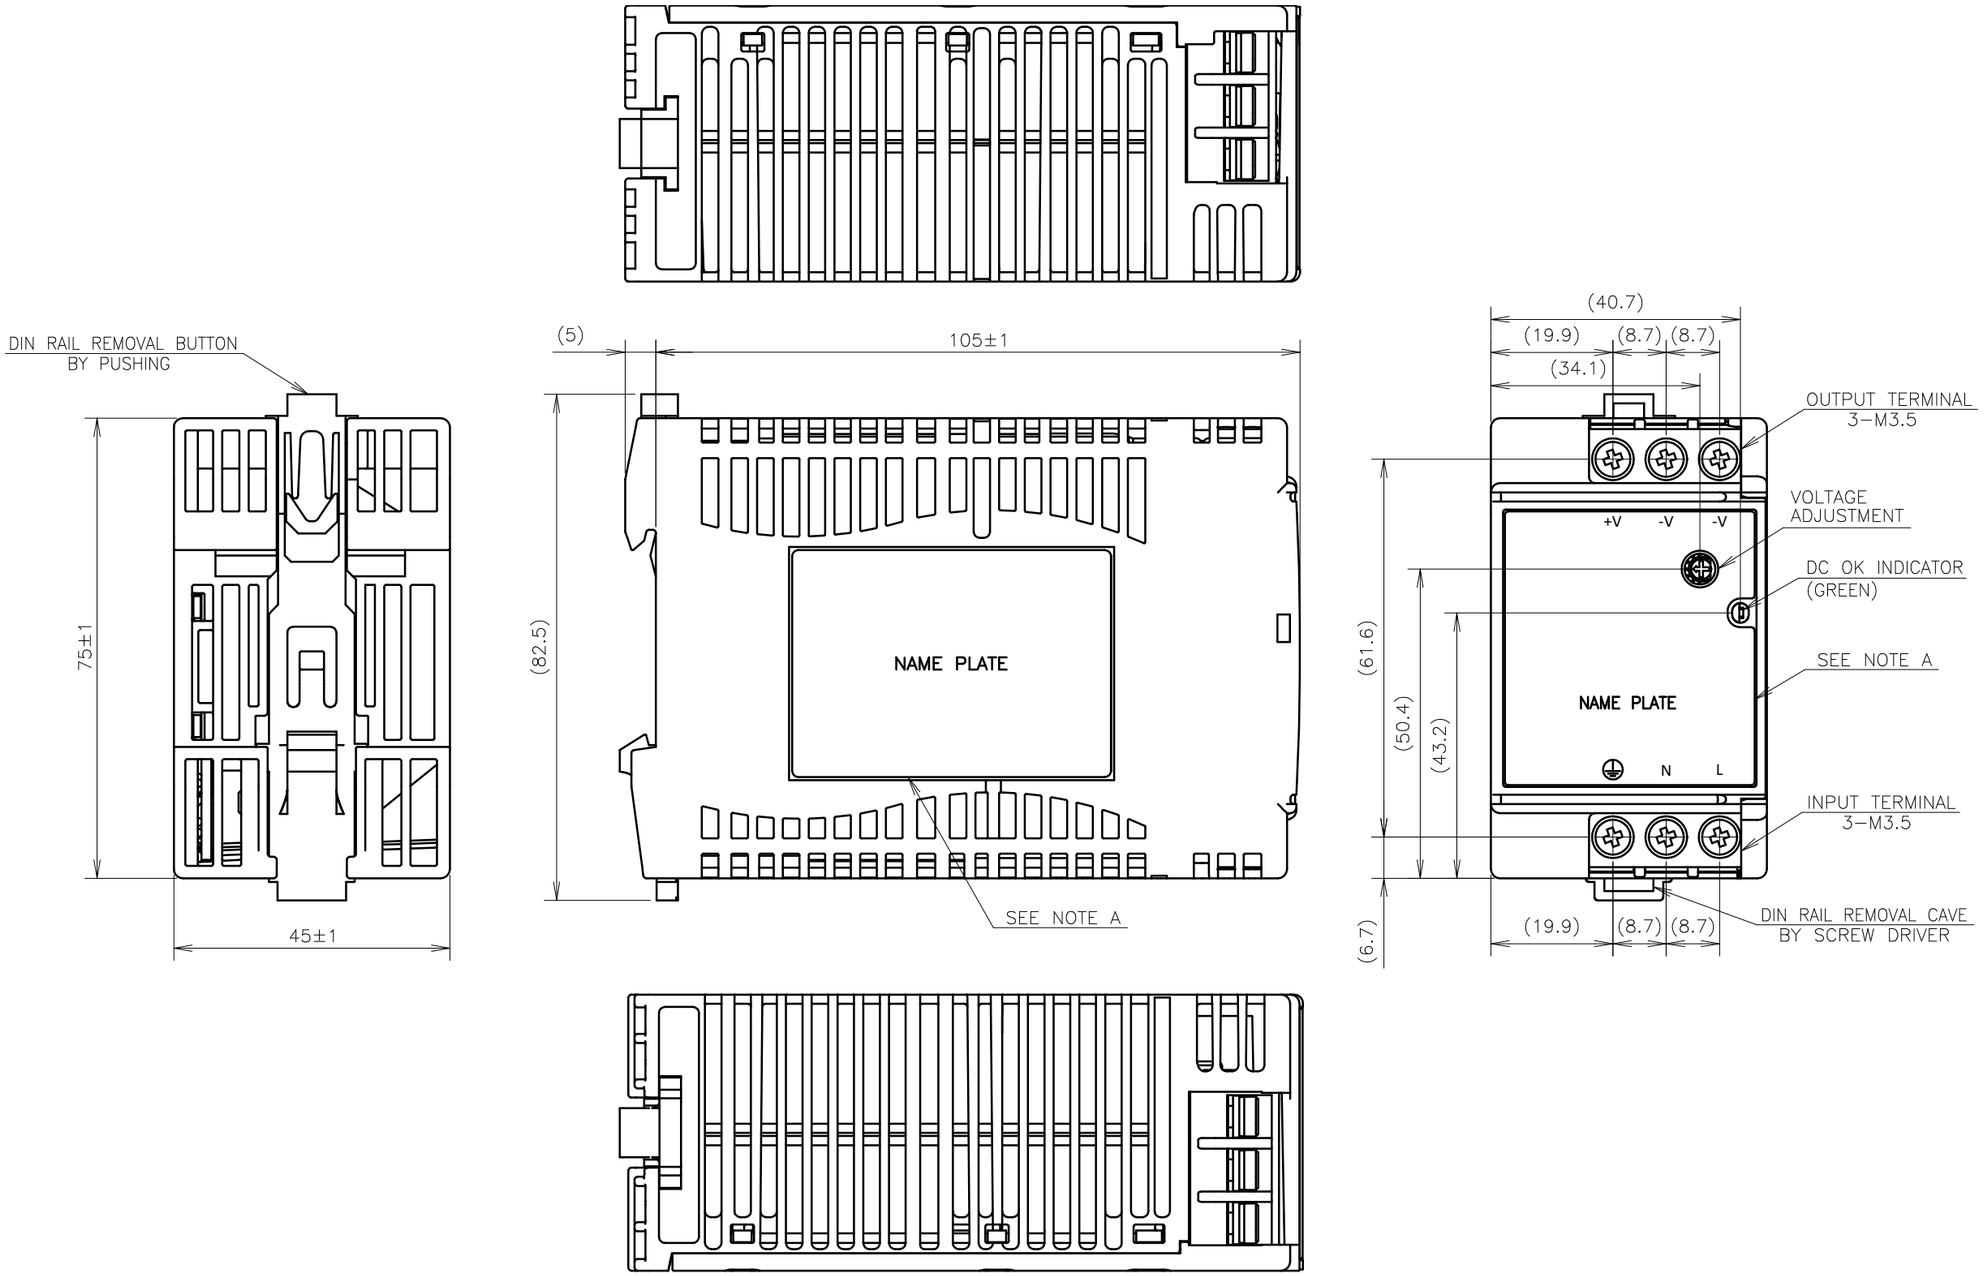

== NOTES ==

A : MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, COUNTRY OF MANUFACTURE AND SAFETY MARKING (FOR ONLY APPROVED PRODUCTS) ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.

B : RECOMMENDED SCREW TORQUE(M3.5): 1.0−1.4N.m(10.2−14.2kgf.cm).

C : RECOMMENDED WIRE: AWG16−20.

(unit : mm)

MODEL NAME	DRJ100
TDK-Lambda	

A268−02−01B