


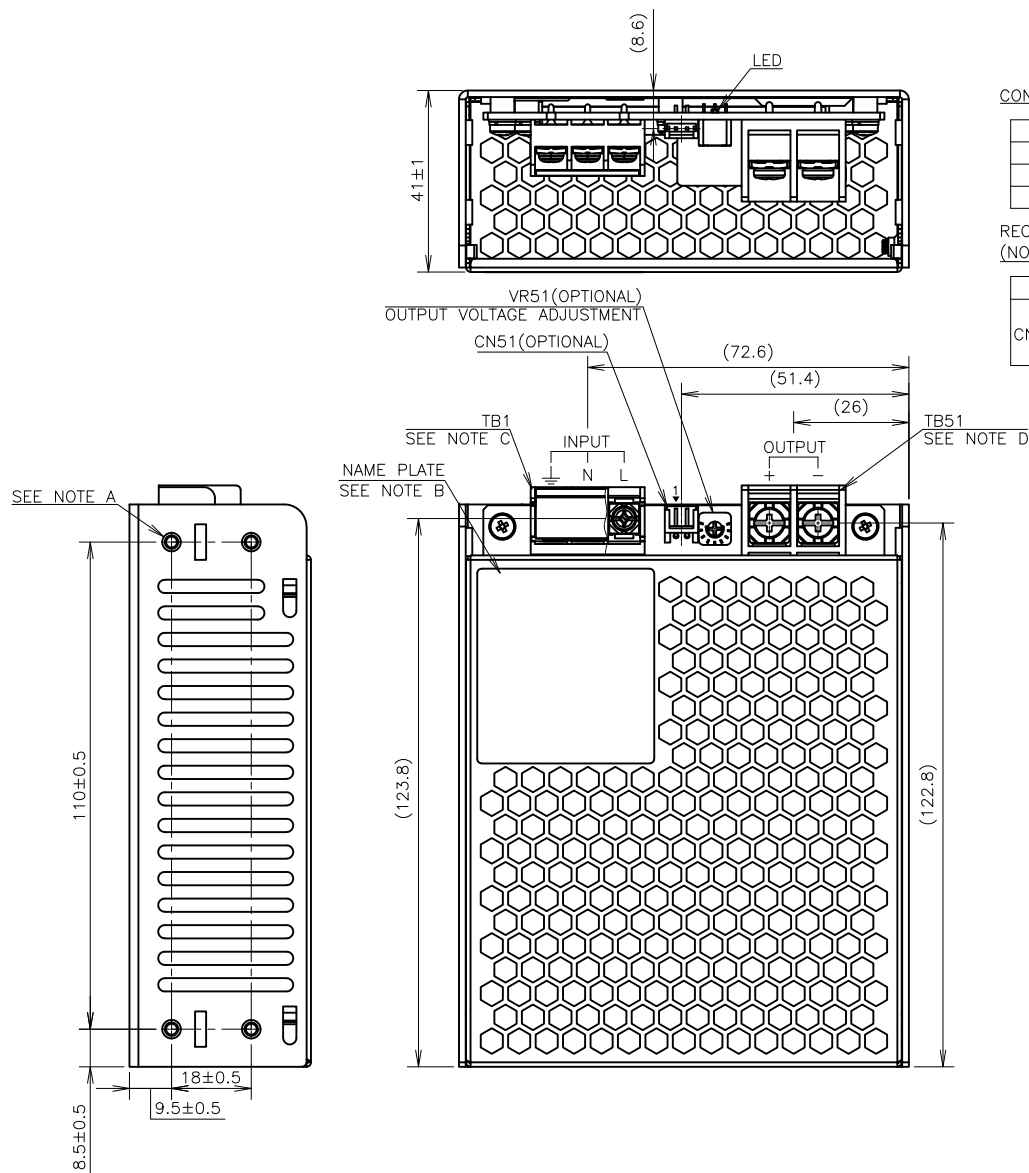

CONNECTORS USED:

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
TB1	T302C-11-A510-03P(KC)	TIANLI	1
TB51	T110-02-02P-KC		1
CN51(OPTIONAL)	S2B-EH(LF)(SN)	J.S.T	1

RECOMMENDED MATCHING HOUSINGS, PINS & TOOL
(NOT INCLUDED WITH THE PRODUCT):

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
SOCKET HOUSING	EHR-2	J.S.T	1
CN51 TERMINAL PINS	SEH-001T-P0.6		2
HAND CRIMPING TOOL	YRS-260,YC-260R		—

PIN CONFIGURATION AND FUNCTION OF CN51

CN51(OPTIONAL)



PIN No.	FUNCTION
1	+R
2	-R

NOTE:

- A: 12-M3 TAPPED & STANDOFF HOLES FOR CUSTOMER'S CHASSIS MOUNTING HOLES.
ALL THE HOLES IN SAME INSTALLATION PLANE MUST BE SCREWED
IN ORDER TO CONFORM THE VIBRATION AND EMI SPEC.
SCREW PENETRATION DEPTH 4.5mm MAX, RECOMMENDED TORQUE : 0.49N•m(5kgf•cm).
- B: MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT,
SAFETY MARKING(FOR ONLY APPROVED PRODUCTS) AND COUNTRY OF MANUFACTURE
ARE SHOWN HEREIN ACCORDANCE WITH THE SPECIFICATIONS.
- C: 3-M3 SCREWS FOR TB1, RECOMMENDED TORQUE: 0.56N•m(5.7kgf•cm)
- D: 2-M3.5 SCREWS FOR TB51, RECOMMENDED TORQUE: 0.89N•m(9.1kgf•cm)

(unit : mm)	
MODEL NAME	GUS350
TDK-Lambda	
CA978-02-01A	