

LS35

EVALUATION DATA

DWG.No PA581-53-01		
APPD	CHK	DWG
TSK 5-Jan-09	Review 5-Jan-09	MM 5-Jan-09

INDEX

	PAGE
1. Evaluation Method	
1-1 Circuit used for determination	T-1~5
(1) Steady state data	
(2) Warm up voltage drift characteristics	
(3) Over current protection (OCP) characteristics	
(4) Over voltage protection (OVP) characteristics	
(5) Output rise characteristics	
(6) Output fall characteristics	
(7) Response to brown out characteristics	
(8) Dynamic line response characteristics	
(9) Dynamic load response characteristics	
(10) Inrush current characteristics	
(11) Leakage current characteristics	
(12) Output ripple and noise waveform	
(13) Electro-Magnetic Interference characteristics	
1-2 List of equipment used	T-6
2. Characteristics	
2-1 Steady state data	
(1) Regulation - line and load, temperature drift	T-7
(2) Output voltage and Ripple voltage vs. input voltage	T-8
(3) Efficiency and Input current vs. Output current	T-9
2-2 Warm up voltage drift characteristics	T-10
2-3 Over current protection (OCP) characteristics	T-11
2-4 Over voltage protection (OVP) characteristics	T-14
2-5 Output rise characteristics	T-15
2-6 Output fall characteristics	T-17
2-7 Hold up time characteristics	T-19
2-8 Dynamic line response characteristics	T-20
2-9 Dynamic load response characteristics	T-21
2-10 Response to brown out characteristics	T-27
2-11 Inrush current waveform	T-29
2-12 Input current harmonics	T-31
2-13 Leakage current characteristics	T-32
2-14 Output ripple and noise waveform	T-33
2-15 Electro-Magnetic Interference characteristics	T-35


Terminology Used

	Definition	
Vin	Input voltage
Vout	Output Voltage
Iin	Input Current
Iout	Output Current
Ta	Ambient temperature

1. Evaluation Method

1-1 Circuit used for determination


- (1) Steady state data

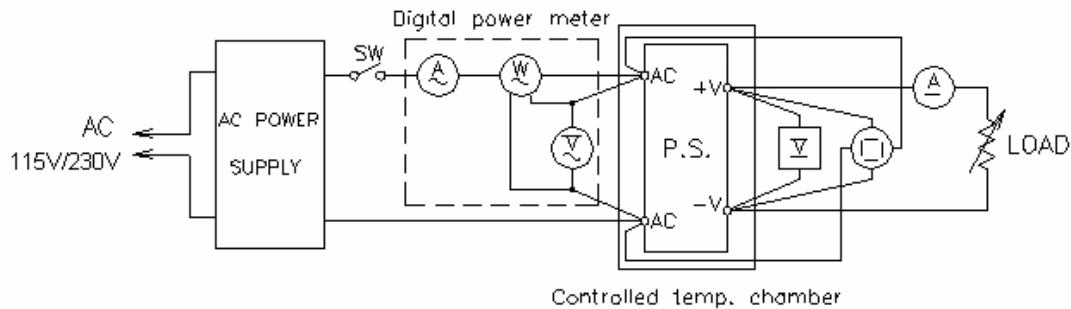

- (2) Warm up voltage drift characteristics

Same as Steady state data


- (3) Over current protection (OCP) characteristics

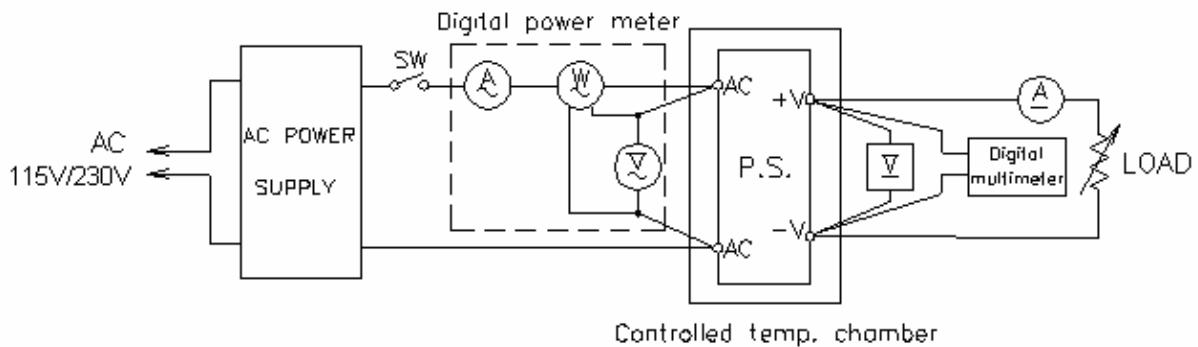

- (4) Over voltage protection (OVP) characteristics

Same as Steady state data


- (5) Output rise characteristics

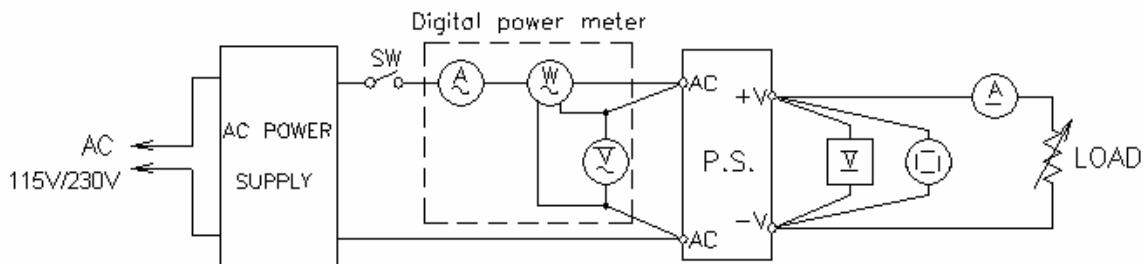

(6) Output fall characteristics

Same as Output rise characteristics


(7) Response to brown out characteristics

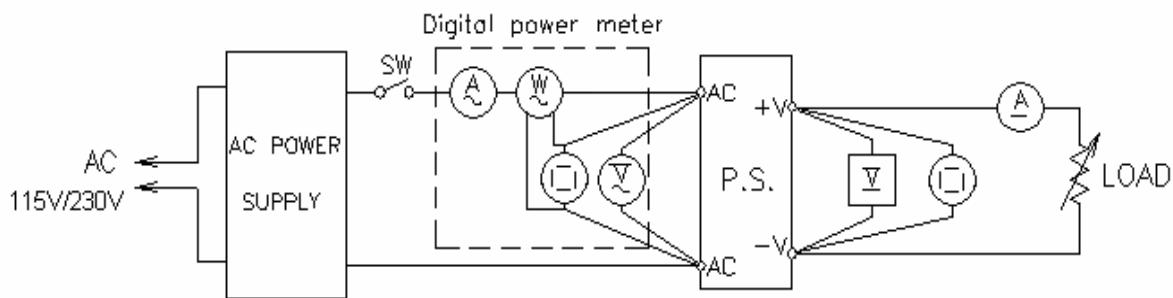


(8) Dynamic line characteristics

Same as Response to brown out characteristics.


(9) Dynamic load response characteristics

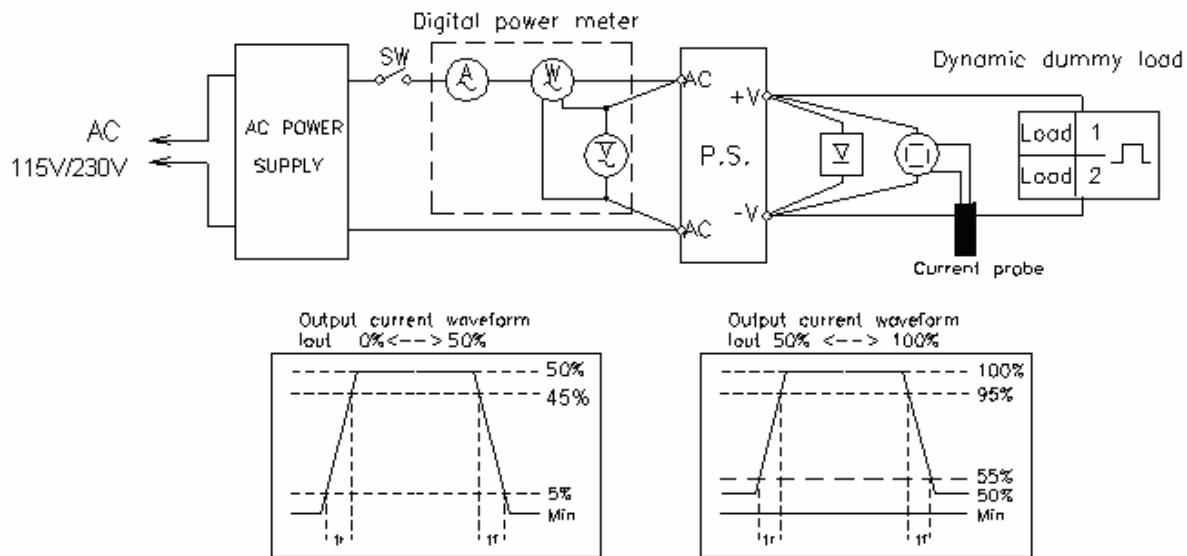

(10) Inrush current characteristics

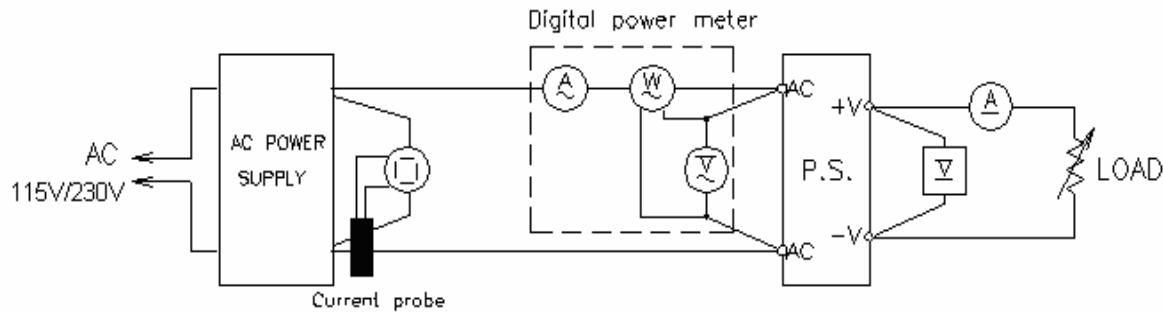


(11) Leakage current characteristics

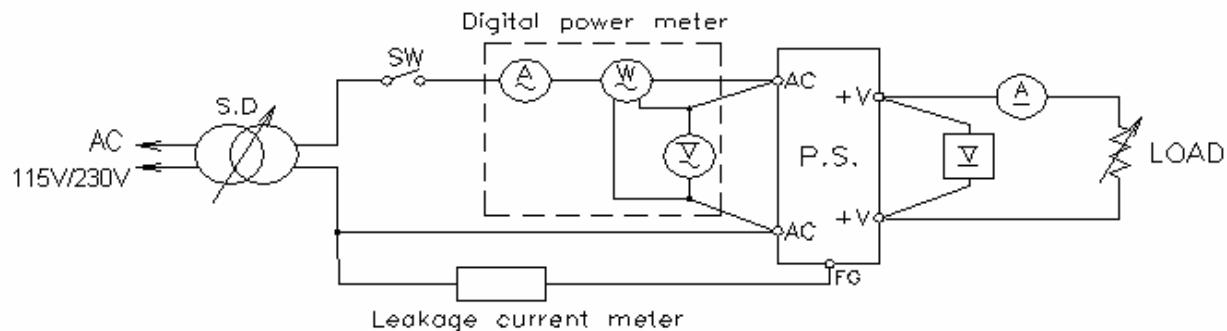


Range used---AC (For SIMPSON TYPE 228)

(12) Output ripple and noise waveform

(a) Normal Mode (using a 12" twisted pair terminated with 0.1uF and 47uF capacitor at 20MHz)

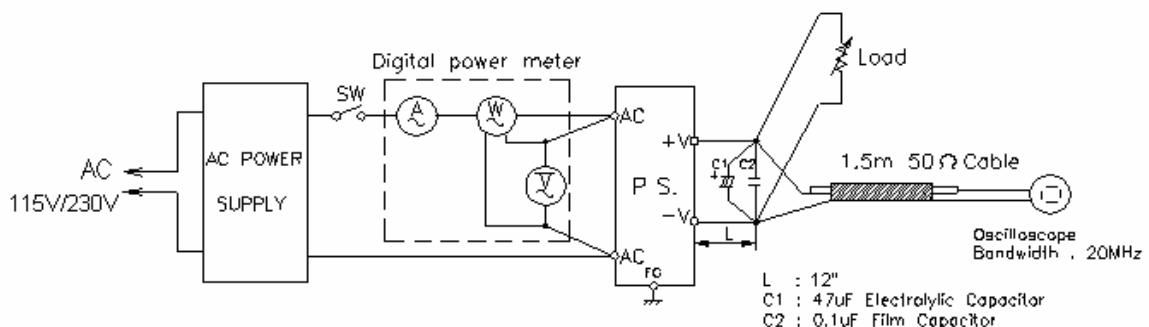


(b) Normal +Common Mode

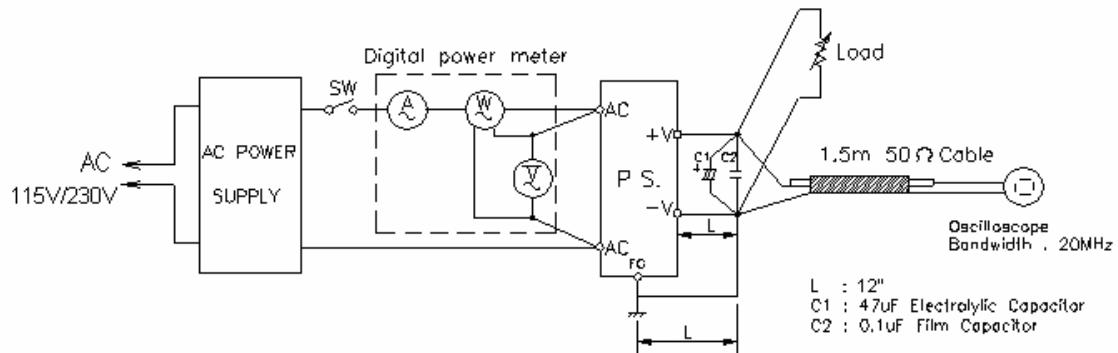


(13) Electro-Magnetic Interference characteristics

(a) Conducted Emission Noise

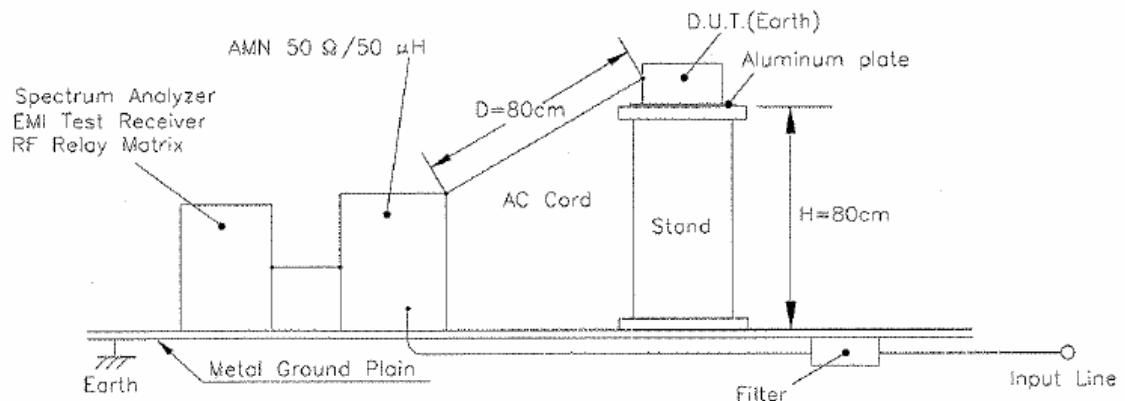

(b) Radiated Emission Noise

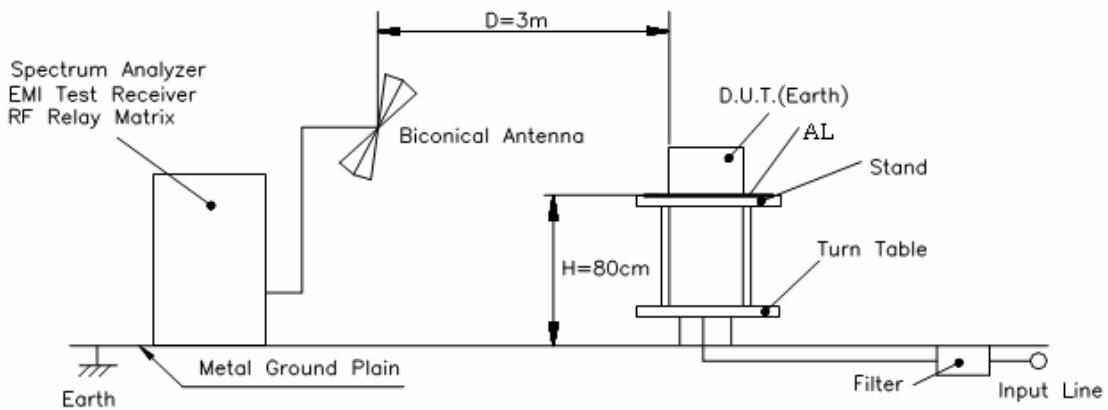

1-2 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA	DL1740/DL1740E
2	DIGITAL MULTIMETER	FLUKE	89 VI
3	DIGITAL POWER METER	YOKOGAWA	WT210
4	CURRENT PROBE/AMPLIFIER	TEKTRONIX	TCP404XL/TCPA400
5	DYNAMIC DUMMY LOAD	CHROMA	63030/63201
6	DYNAMIC DUMMY LOAD	KIKUSUI	PLZ1004W
7	CONTROLLED TEMP. CHAMBER	ESPEC	SU-241
8	LEAKAGE CURRENT METER	SIMPSON	228
9	AC SOURCE	KIKUSUI	PCR-2000L
10	AC SOURCE	CHROMA	6530
11	POWER ANALYZER	CHROMA	6630
12	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI
13	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESI26
14	LISN	ROHDE&SCHWARZ	ENV216
15	ANTENNA	ROHDE&SCHWARZ	HL562

2. Characteristics

2.1 Steady State Data

(1) Regulation - Line and Load, Temperature Drift

5V

1. Regulation-line and load

Condition Ta : 25°C

Iout \ Vin	88VAC	115VAC	230VAC	264VAC	line regulation	
0%	5.011	5.011	5.011	5.011	0.000V	0.000%
50%	5.006	5.006	5.006	5.006	0.000V	0.000%
100%	5.001	5.001	5.002	5.002	0.001V	0.020%
load regulation	0.010V	0.010V	0.009V	0.009V	line regulation	
	0.200%	0.200%	0.180%	0.180%		

2. Temperature drift

Conditions; Vin = 115Vac

Iout = 100%

Ta	-25°C	25°C	40°C	temperature stability
Vout	4.984V	5.001V	4.972V	0.029V

12V

1. Regulation-line and load

Condition Ta : 25°C

Iout \ Vin	88VAC	115VAC	230VAC	264VAC	line regulation	
0%	12.005	12.004	12.004	12.004	0.001V	0.008%
50%	12.001	12.001	12.001	12.001	0.000V	0.000%
100%	11.998	11.998	11.998	11.998	0.000V	0.000%
load regulation	0.007V	0.006V	0.006V	0.006V	line regulation	
	0.058%	0.050%	0.050%	0.050%		

2. Temperature drift

Conditions; Vin = 115Vac

Iout = 100%

Ta	-25°C	25°C	40°C	temperature stability
Vout	11.993V	11.998V	11.992V	0.006V

24V

1. Regulation-line and load

Condition Ta : 25°C

Iout \ Vin	88VAC	115VAC	230VAC	264VAC	line regulation	
0%	23.962	23.962	23.962	23.962	0.000V	0.000%
50%	23.957	23.957	23.957	23.957	0.000V	0.000%
100%	23.957	23.957	23.957	23.957	0.000V	0.000%
load regulation	0.005V	0.005V	0.005V	0.005V	line regulation	
	0.021%	0.021%	0.021%	0.021%		

2. Temperature drift

Conditions; Vin = 115Vac

Iout = 100%


Ta	-25°C	25°C	50°C	temperature stability
Vout	23.995V	23.957V	23.935V	0.060V

2-1 Steady State Data


(2) Output Voltage And Ripple Voltage Vs Input Voltage

Condition : Iout = 100%
 Ta = -25°C
 = 25°C
 = 50°C


5V

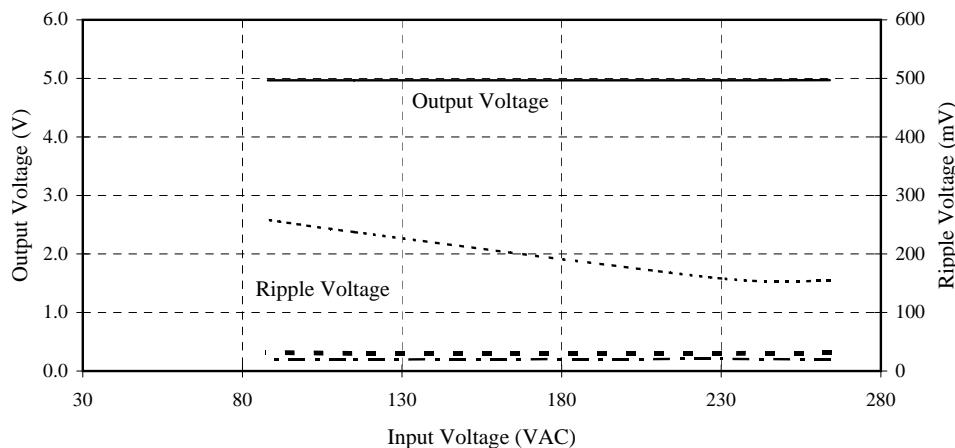

12V

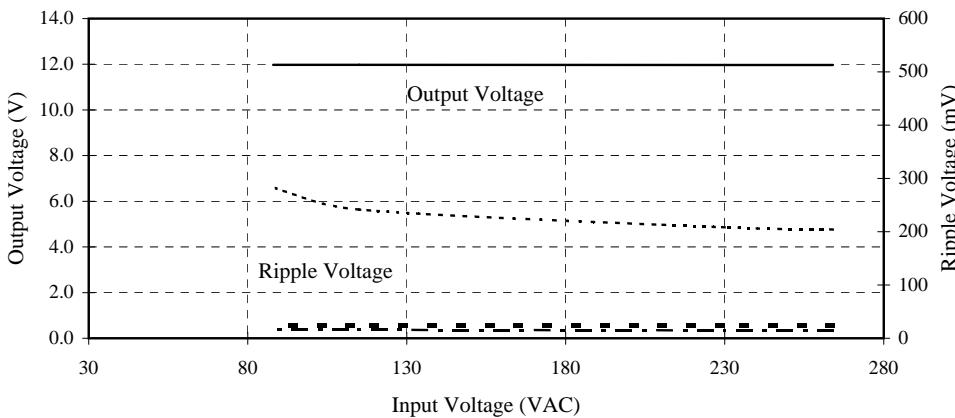


24V

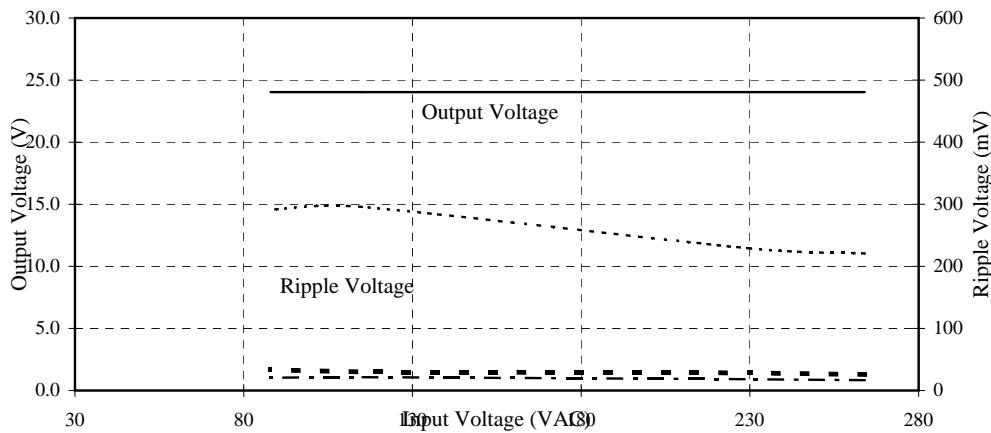


2-1 Steady State Data

(3) Efficiency And Input Current Vs Output Current


Conditions:

 $T_a = 25^\circ C$ $V_{in} = 88\text{ Vac}$ 115 Vac 230 Vac 264 Vac 


5V

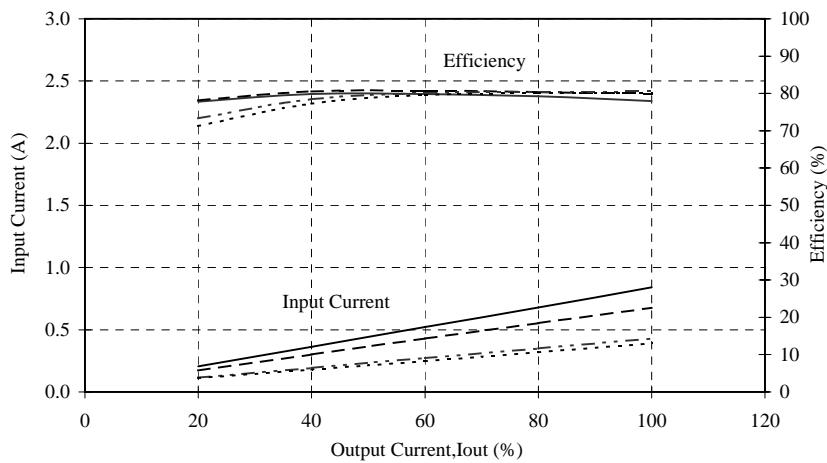

12V

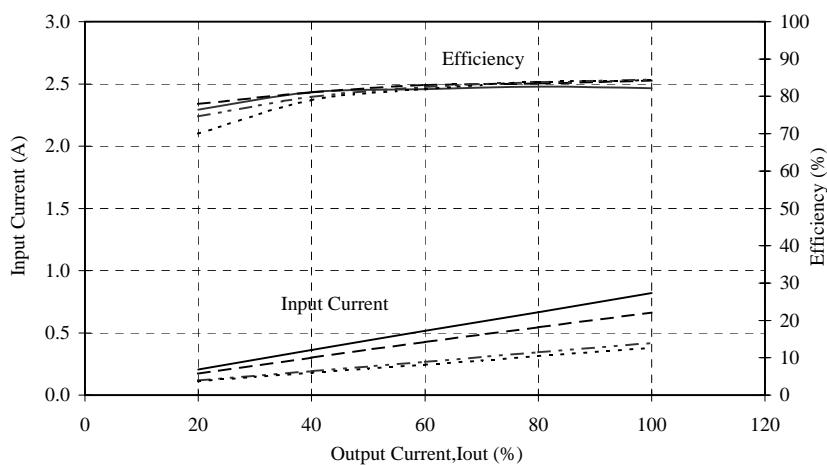

24V



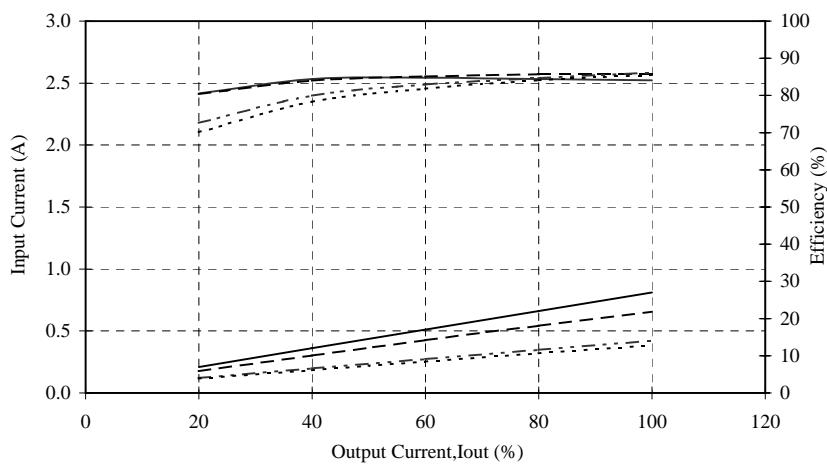


2-2 Warm up voltage drift characteristics


Conditions: Vin : 230VAC

Iout : 100%

Ta : 25°C

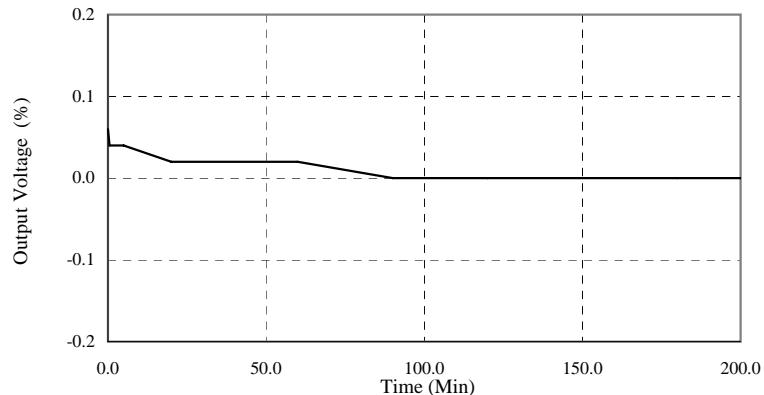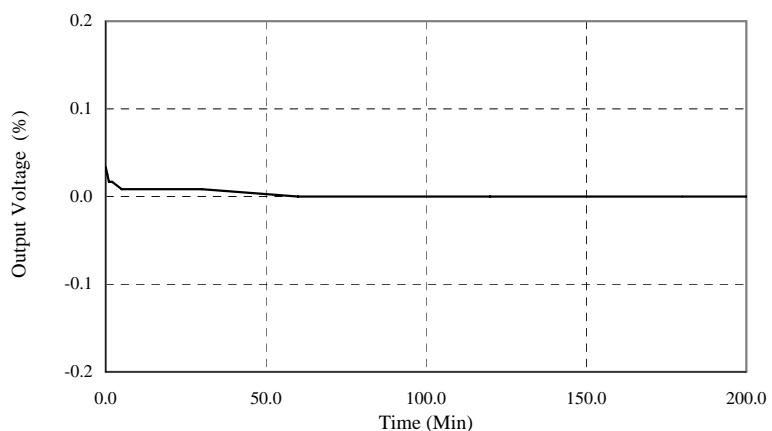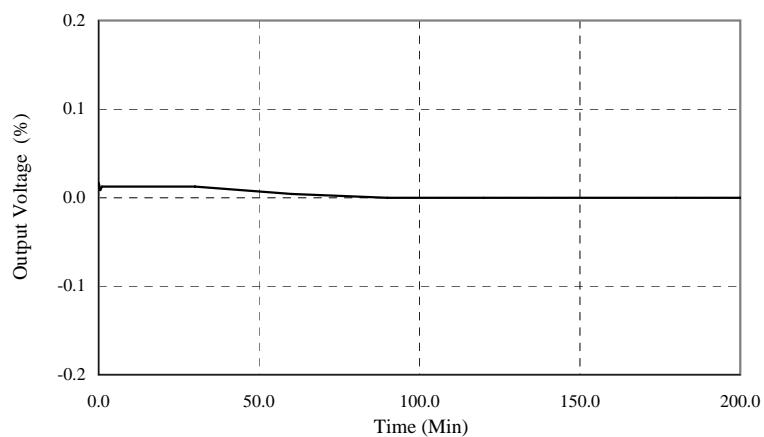
5V**12V****24V**

2-3 Over current protection (OCP) characteristics

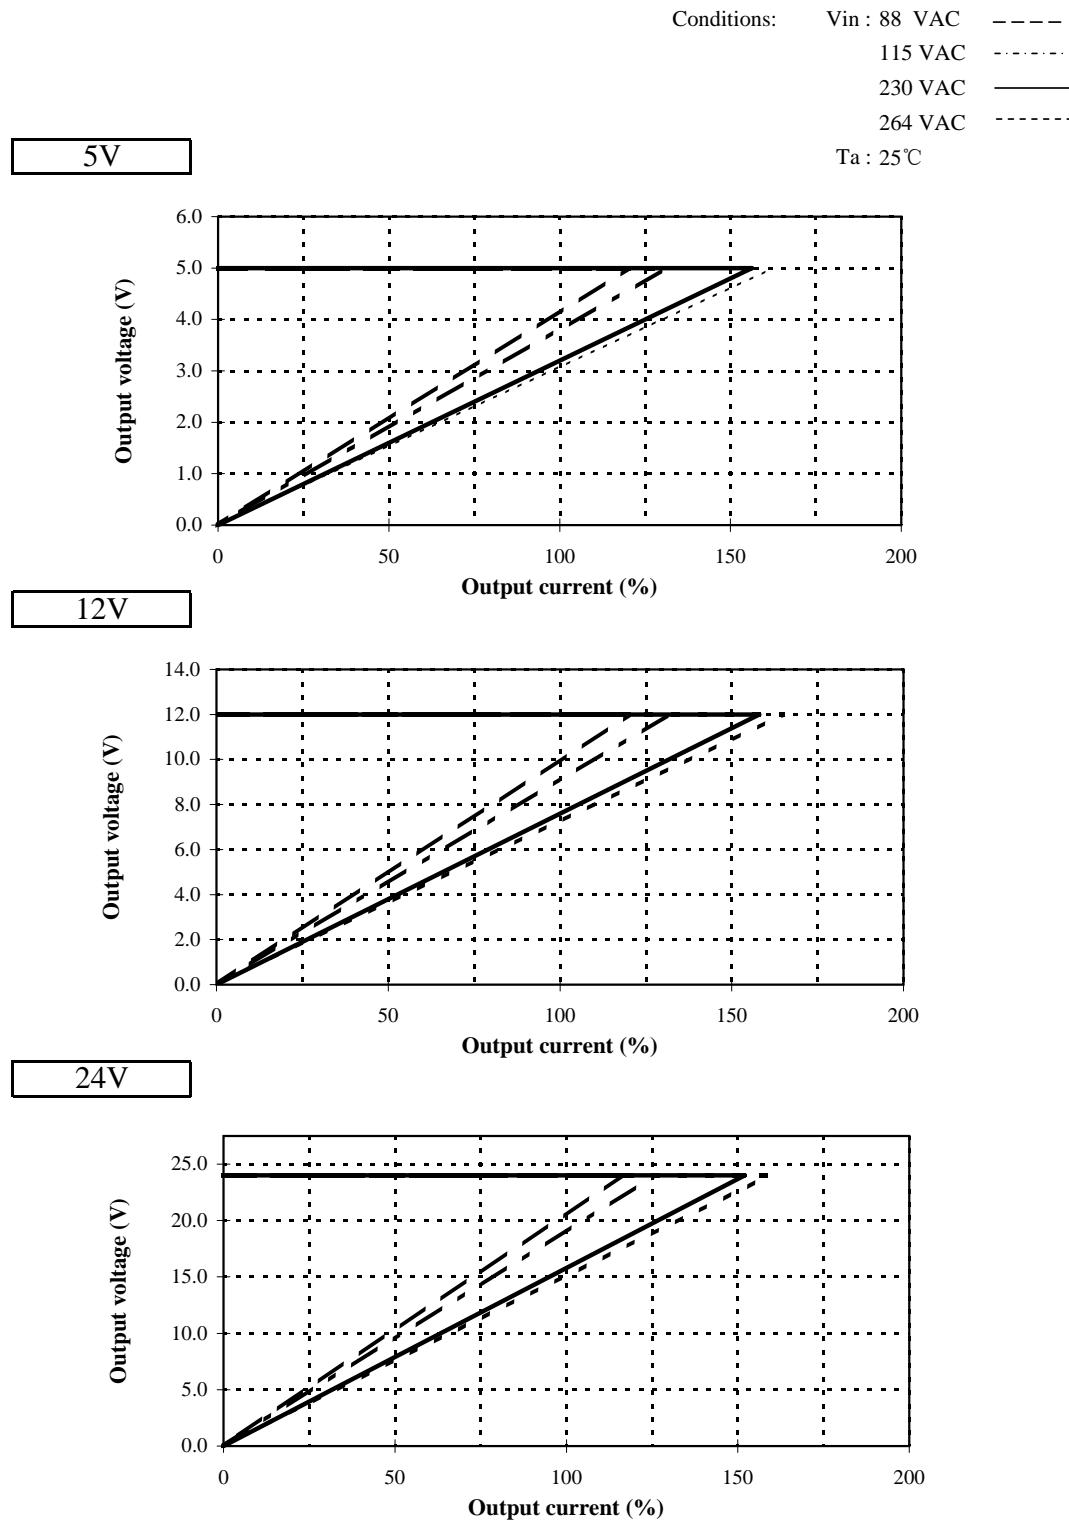


2-3 Over current protection (OCP) characteristics

Conditions: Vin : 115VAC
 Ta : -25°C -----
 25°C -·-·-·-·-
 50°C ———

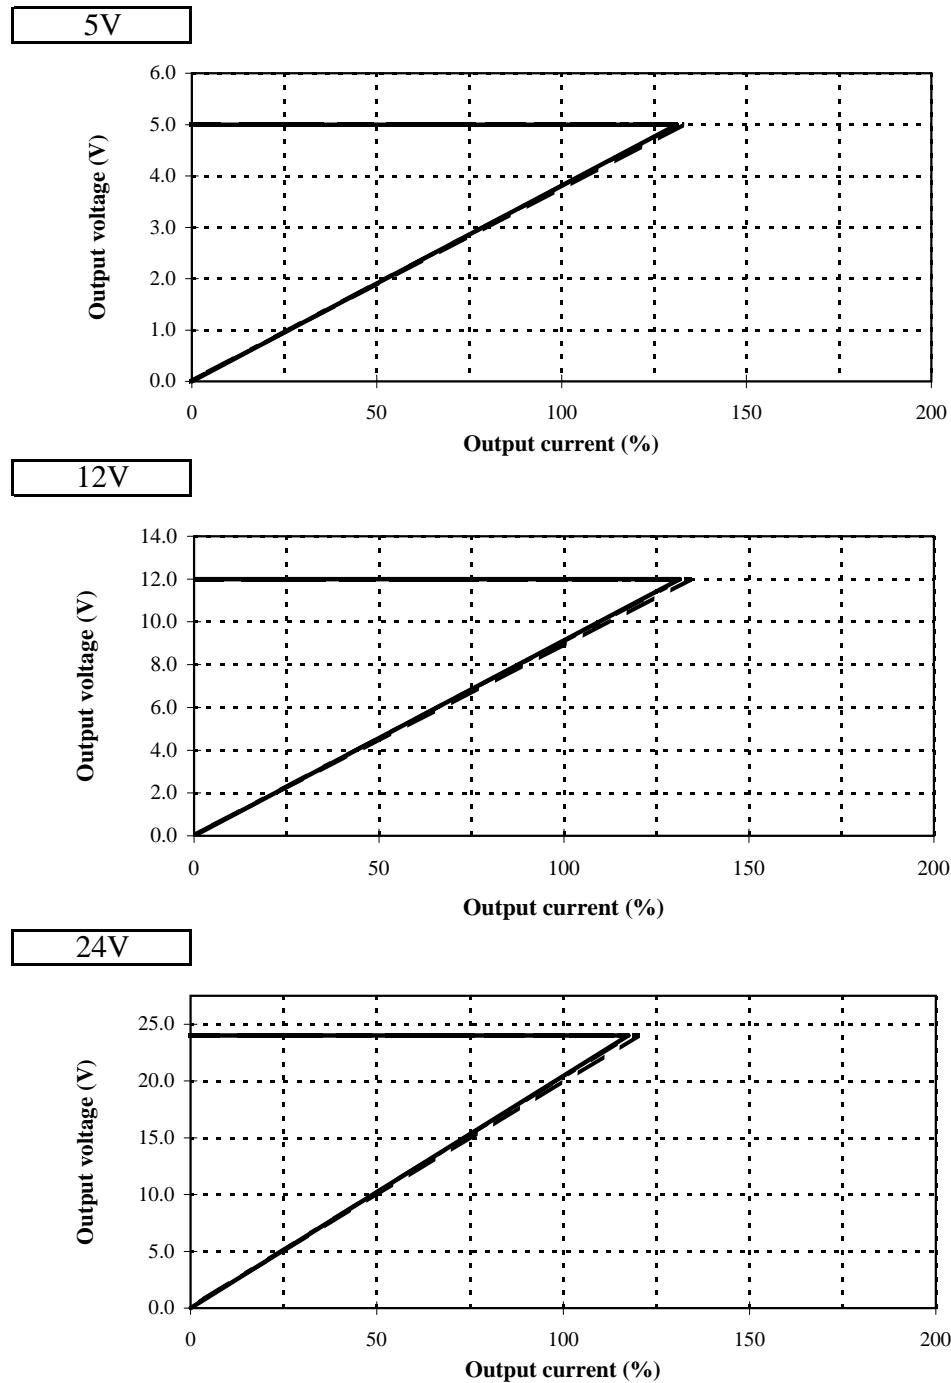

2-3 Over current protection (OCP) characteristics


Conditions: Vin : 230VAC
 Ta : -25°C -----
 25°C -·-·-·-·-
 50°C ———

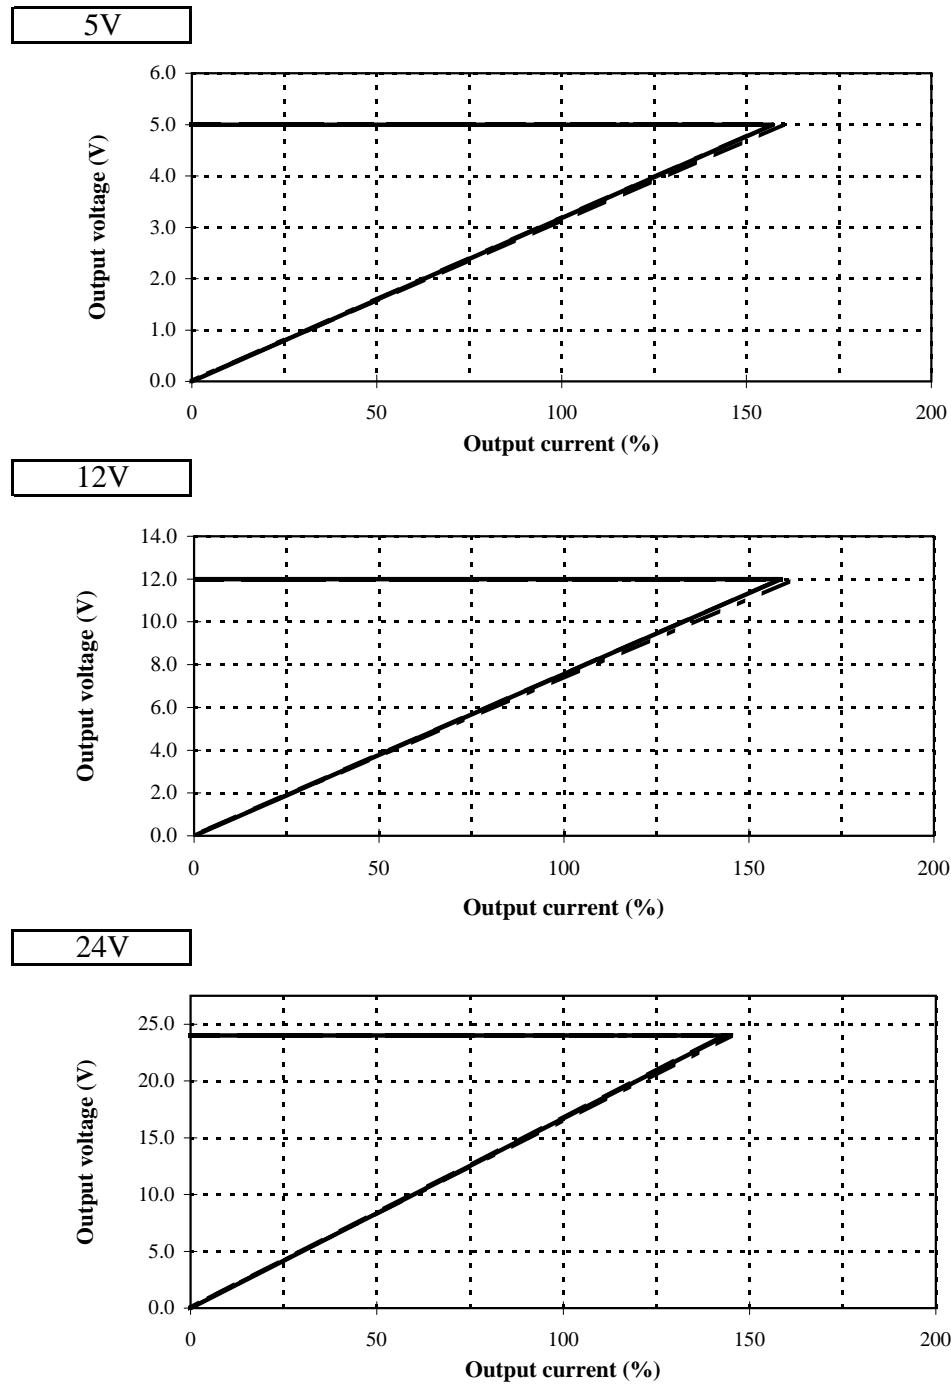


2-4 Over Voltage Protection (OVP) Characteristics

Conditions : $T_a = 25^{\circ}\text{C}$
 $V_{in} = 230\text{VAC}$
 $I_{out} = 0\%$


5V

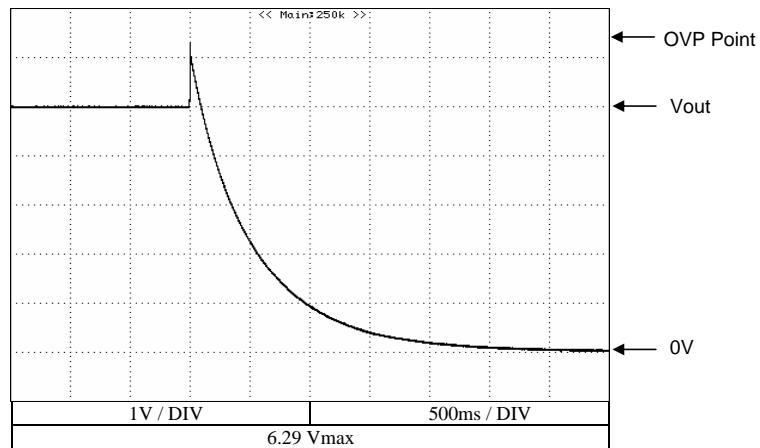

12V

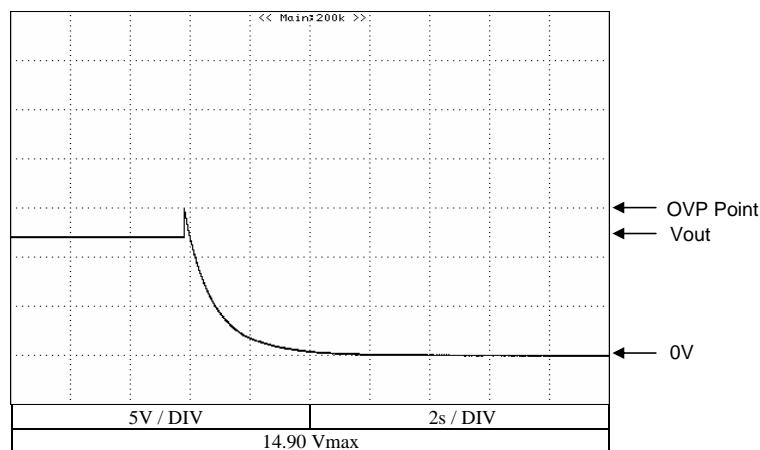




24V

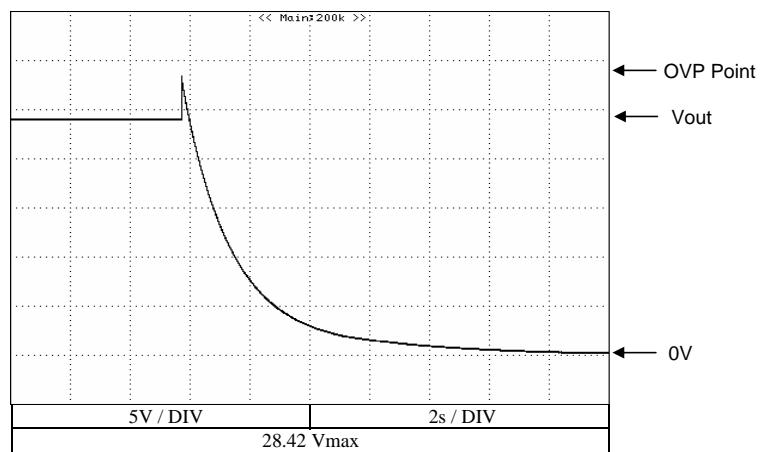

2-5 Output Rise Characteristics

Conditions;

- V_{in} : 88VAC (A)
- : 115VAC (B)
- : 230VAC (C)
- : 264VAC (D)
- I_{out} : 0%
- T_a : 25°C

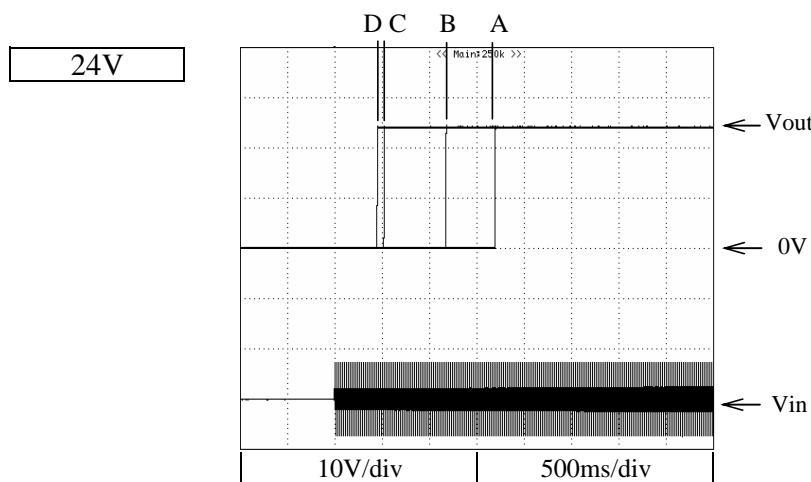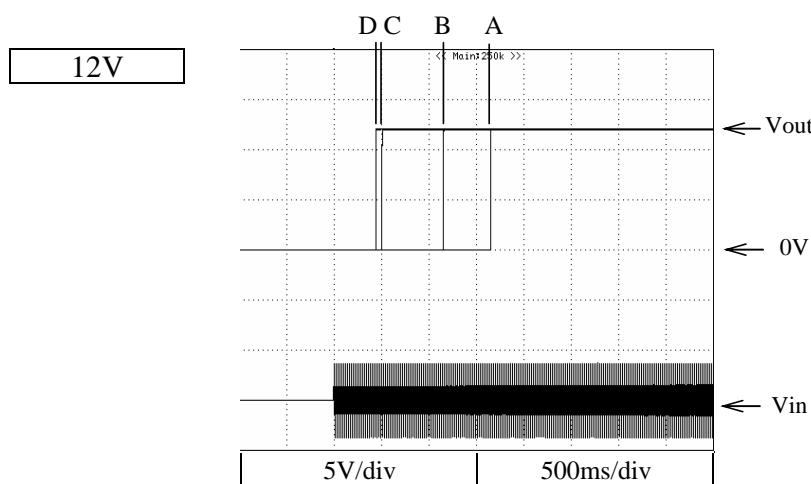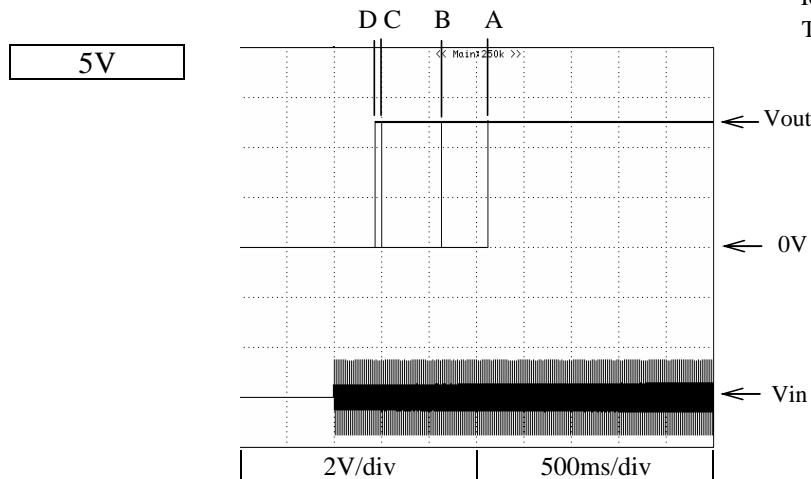

2-5 Output Rise Characteristics

Conditions; Vin : 88VAC (A)




: 115VAC (B)

: 230VAC (C)

: 264VAC (D)

Iout : 100%




Ta : 25°C

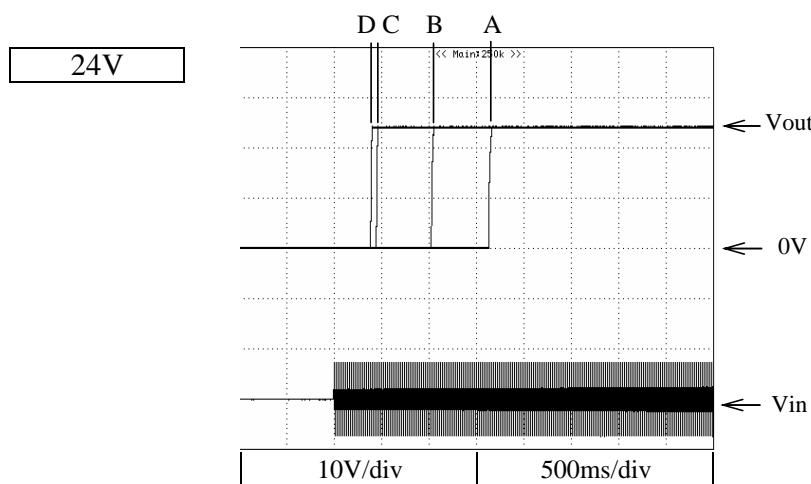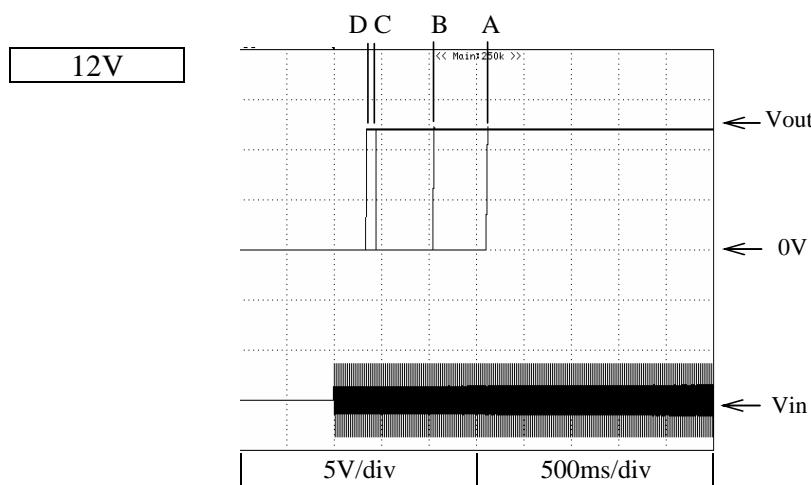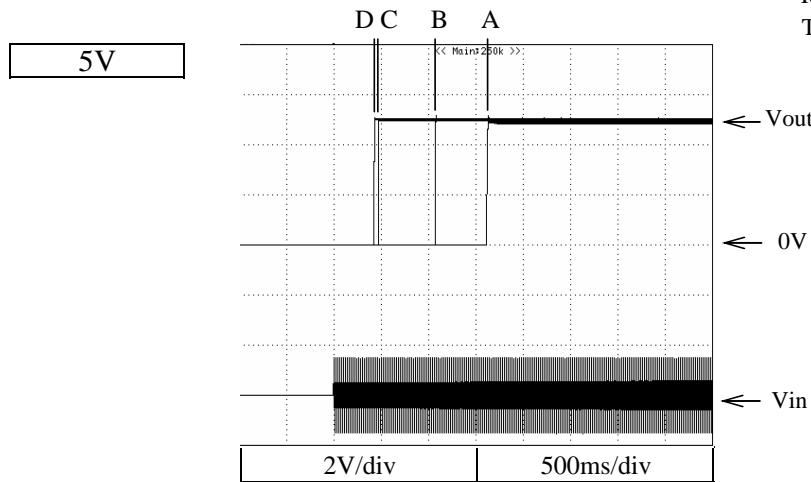

2-6 Output Fall Characteristics

Conditions;

- V_{in} : 88VAC (A)
- : 115VAC (B)
- : 230VAC (C)
- : 264VAC (D)
- I_{out} : 0%
- T_a : 25°C

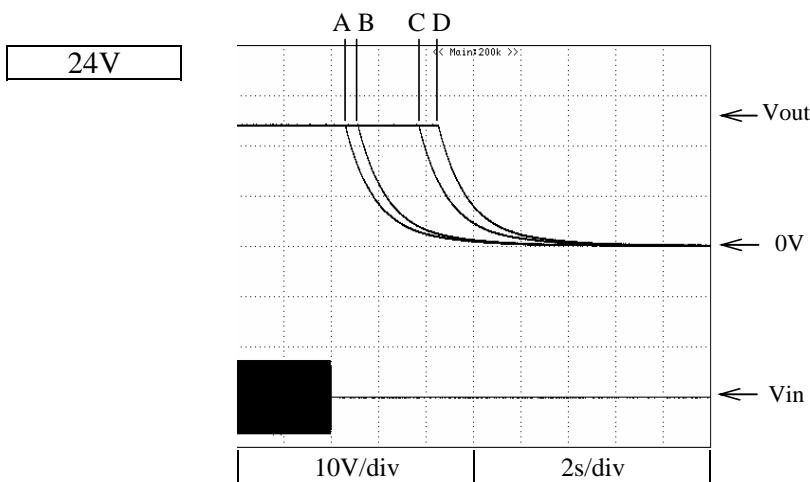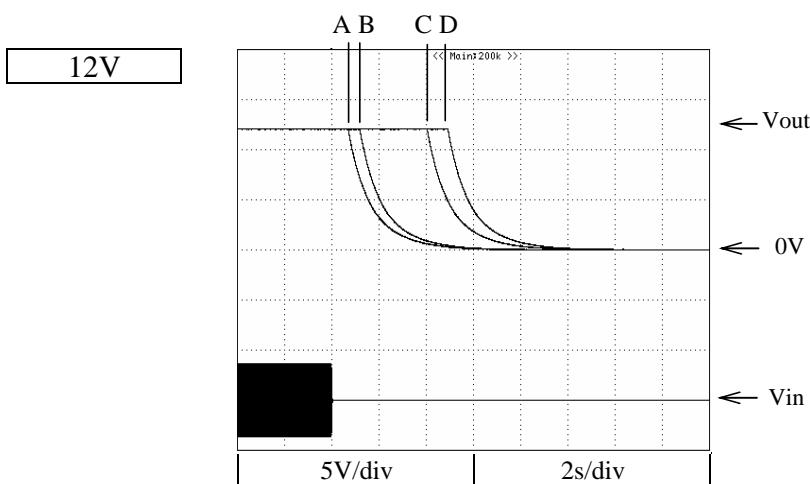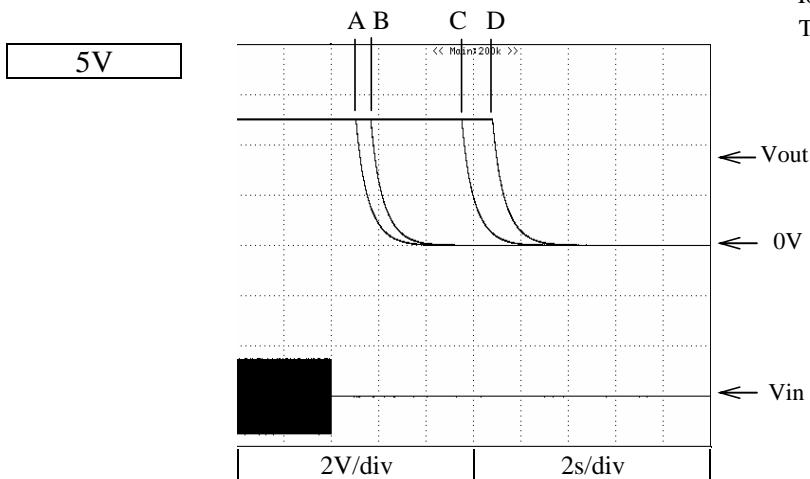

2-6 Output Fall Characteristics

Conditions; Vin : 88VAC (A)




: 115VAC (B)

: 230VAC (C)

: 264VAC (D)

Iout : 100%


Ta : 25°C

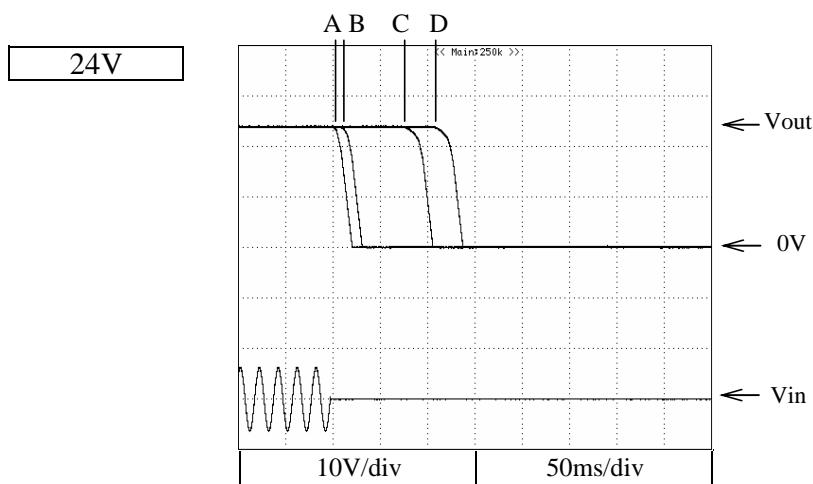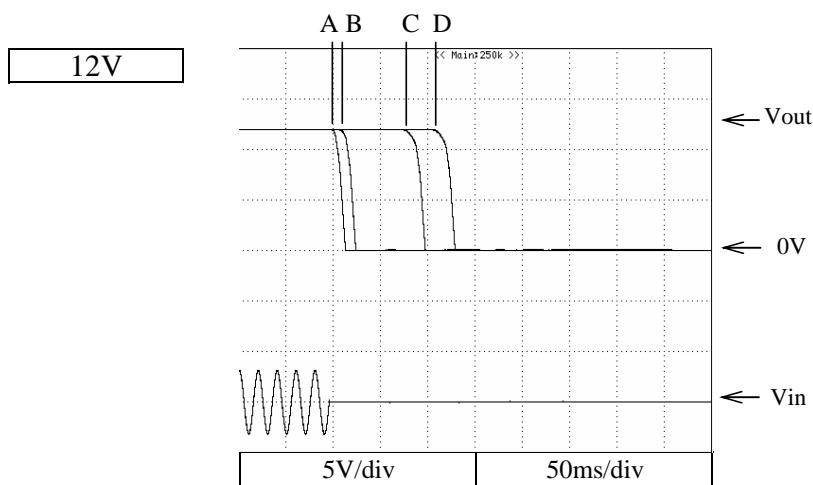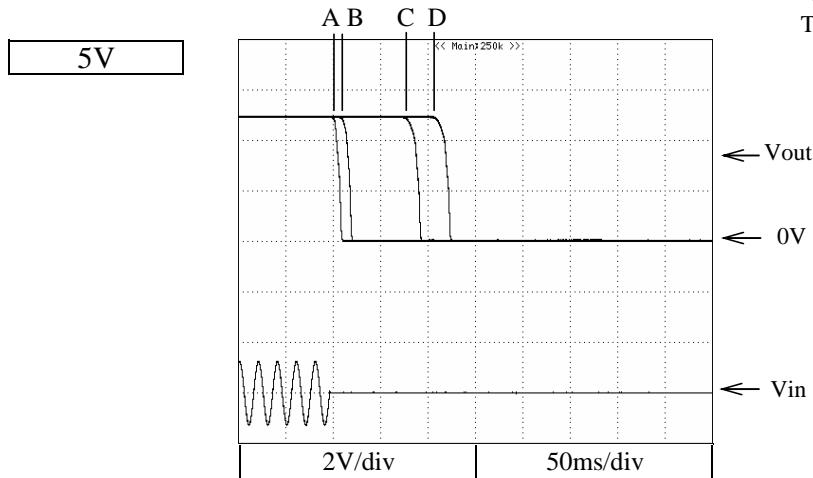


2-7 Hold Up Time Characteristics

Conditions
Vin: 115VAC -----
230VAC ————
Ta: 25°C


5V

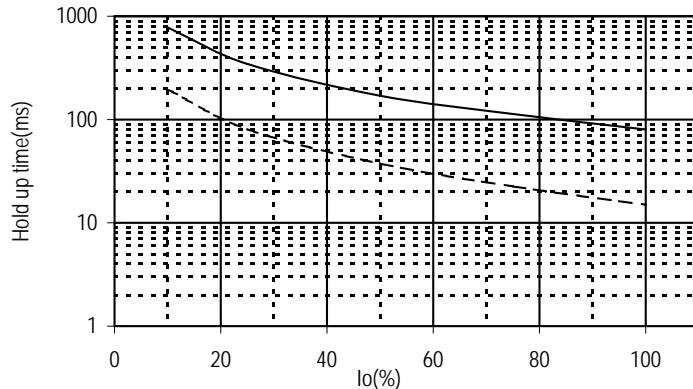

12V

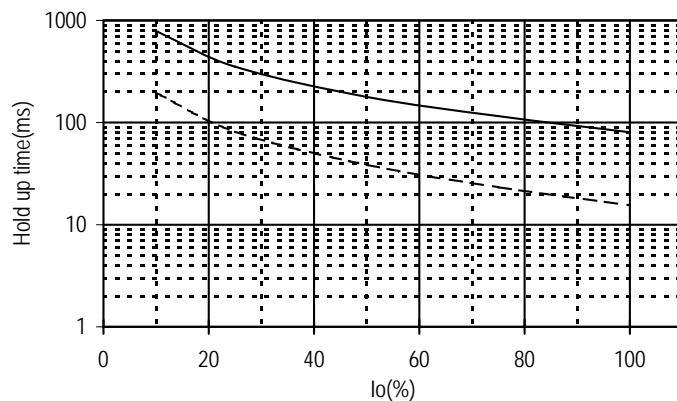


24V

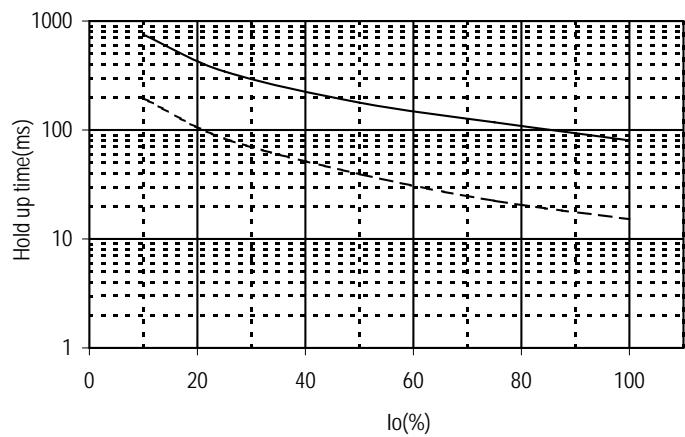


2-8 Dynamic Line Response Characteristics

Conditions : Vin = 88<=>132 VAC (A)
 = 170<=>264 VAC (B)
 Iout = 100%
 Ta = 25°C


5V

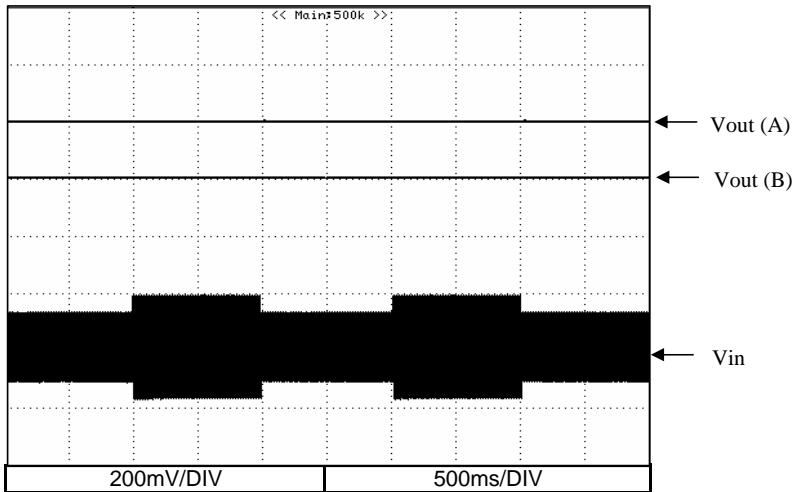

12V

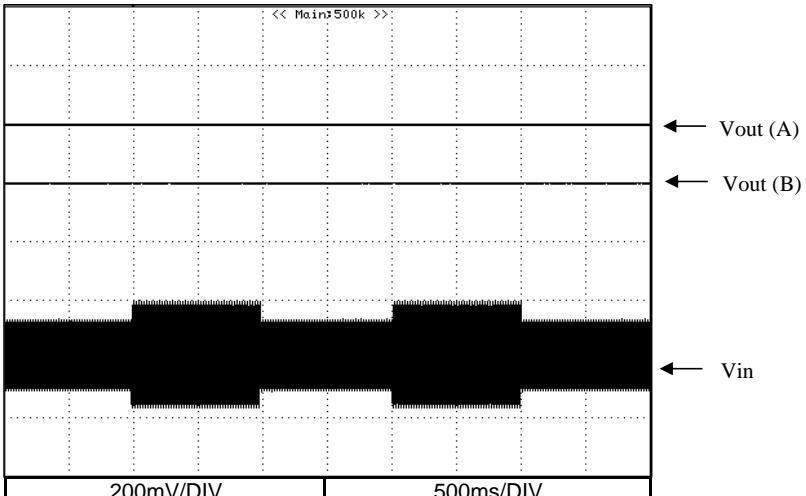

24V

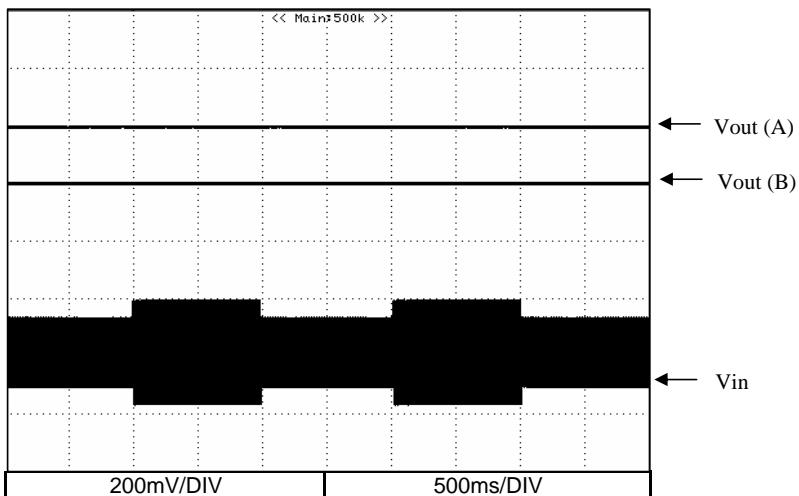


2-9 Dynamic Load Response Characteristics


Conditions : Vin = 115VAC
Ta = 25°C

5V

f=100Hz

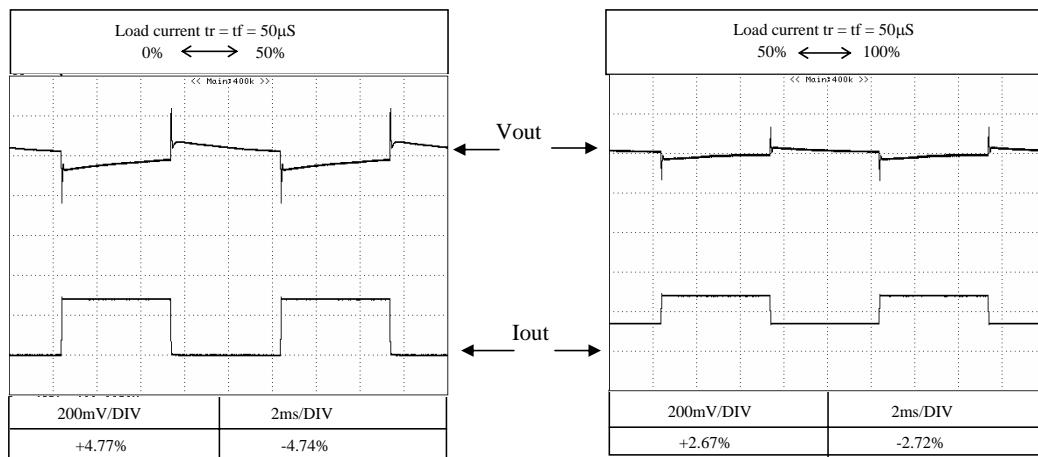

f=1KHz

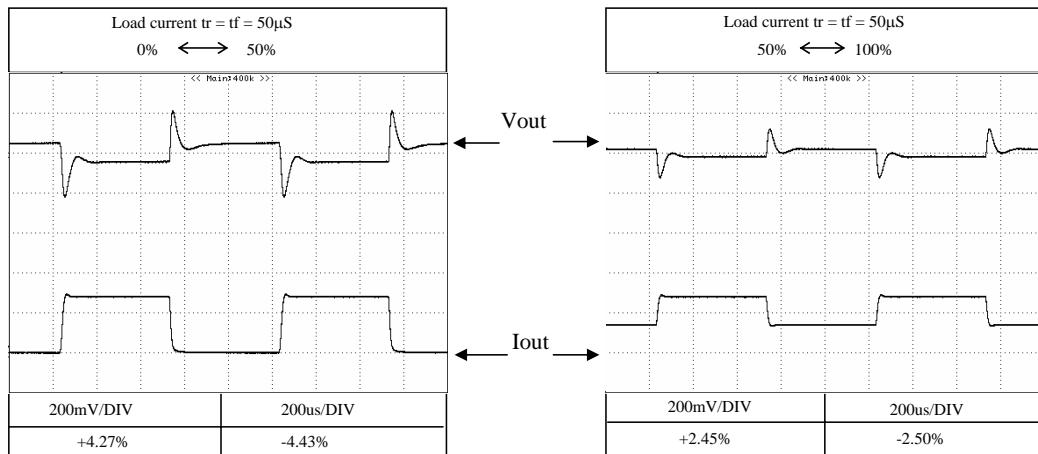


2-9 Dynamic Load Response Characteristics


Conditions :
 $V_{in} = 230V_{AC}$
 $T_a = 25^{\circ}\text{C}$

5V

f=100Hz

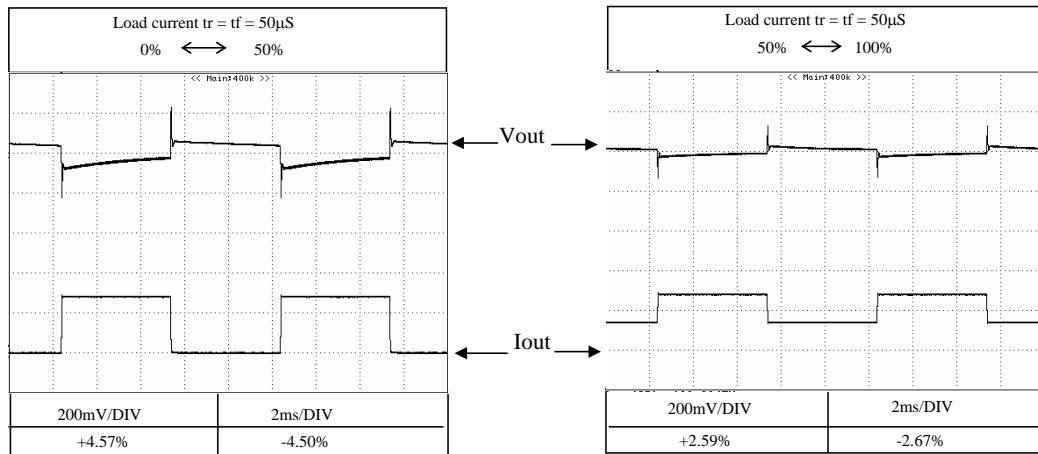



f=1KHz

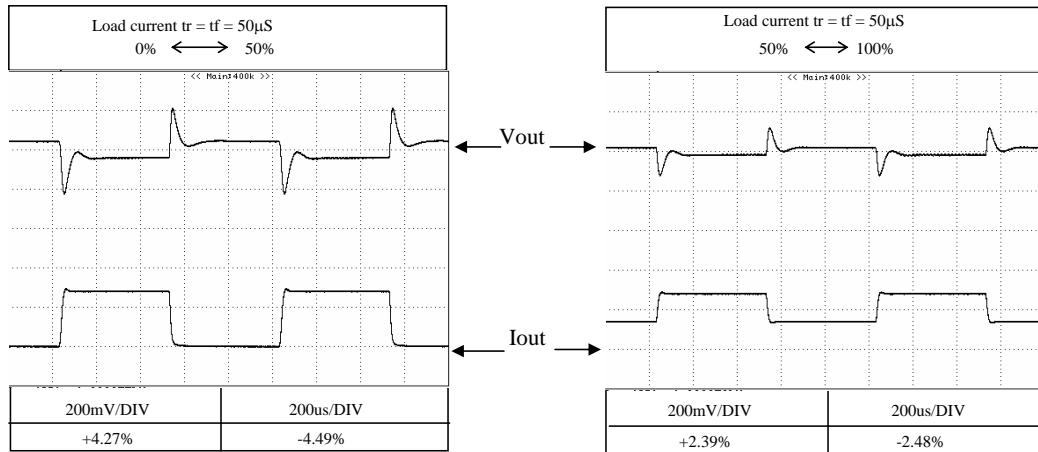

2-9 Dynamic Load Response Characteristics

Conditions : $V_{in} = 115\text{VAC}$
 $T_a = 25^\circ\text{C}$



12V

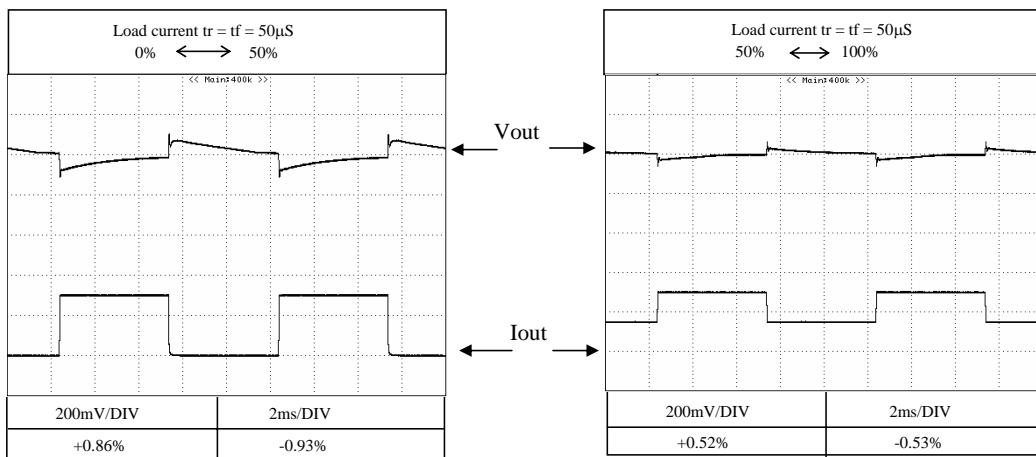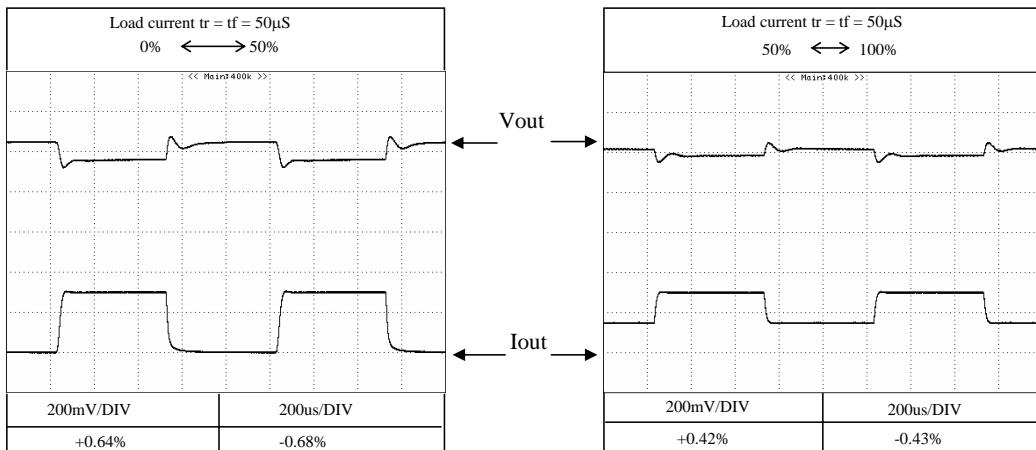f=100Hzf=1KHz

2-9 Dynamic Load Response Characteristics

Conditions :
 Vin = 230VAC
 Ta = 25°C



12V

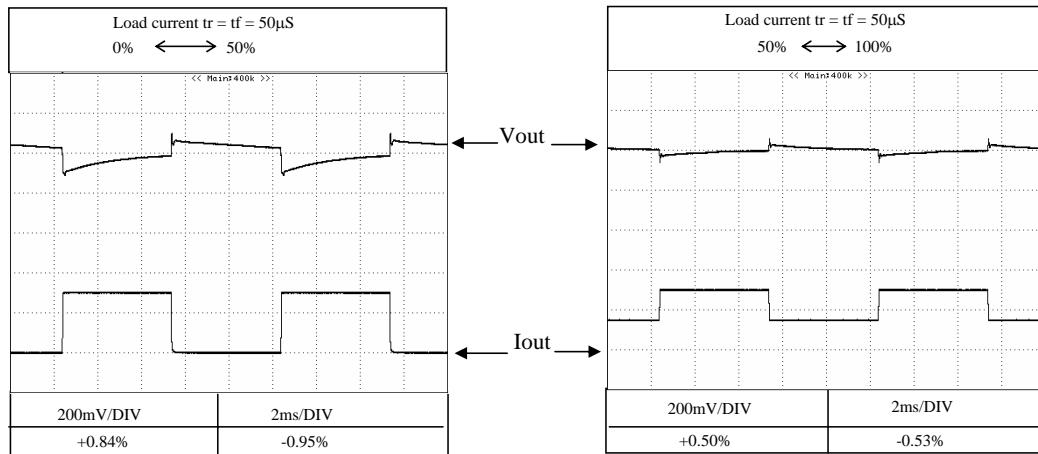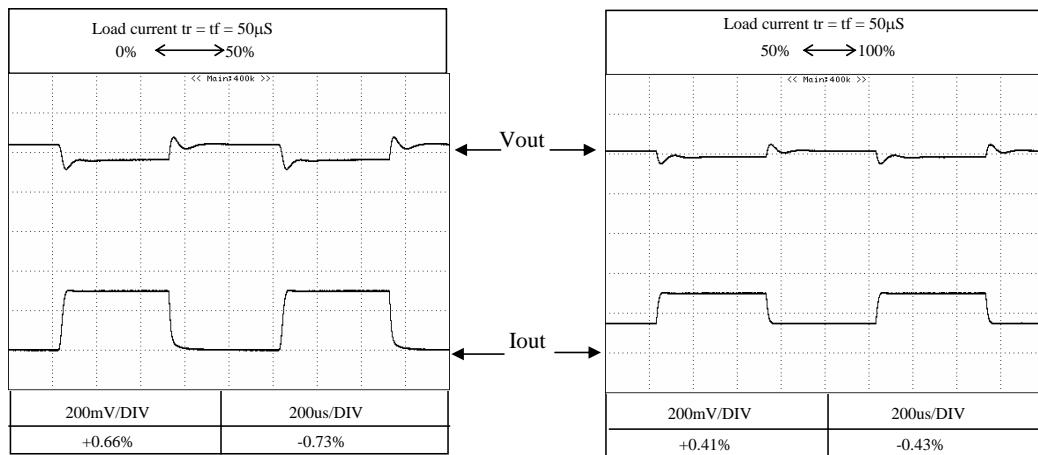f=100Hzf=1KHz

2-9 Dynamic Load Response Characteristics

Conditions : Vin = 115VAC
 Ta = 25°C



24V

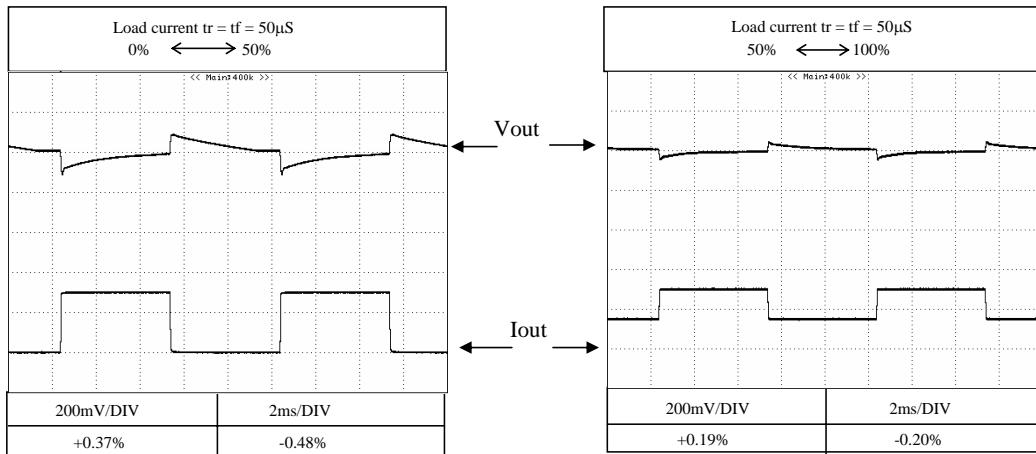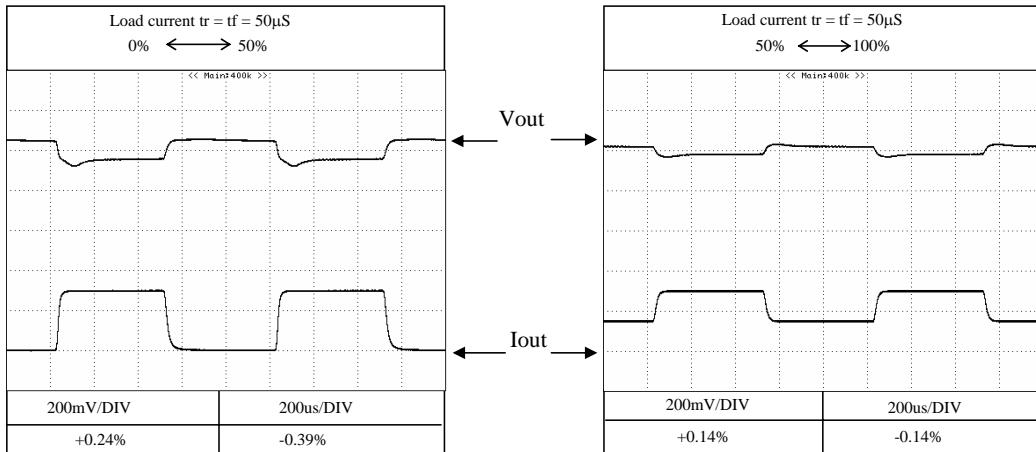f=100Hzf=1KHz

2-9 Dynamic Load Response Characteristics

Conditions :
 Vin = 230VAC
 Ta = 25°C

24V

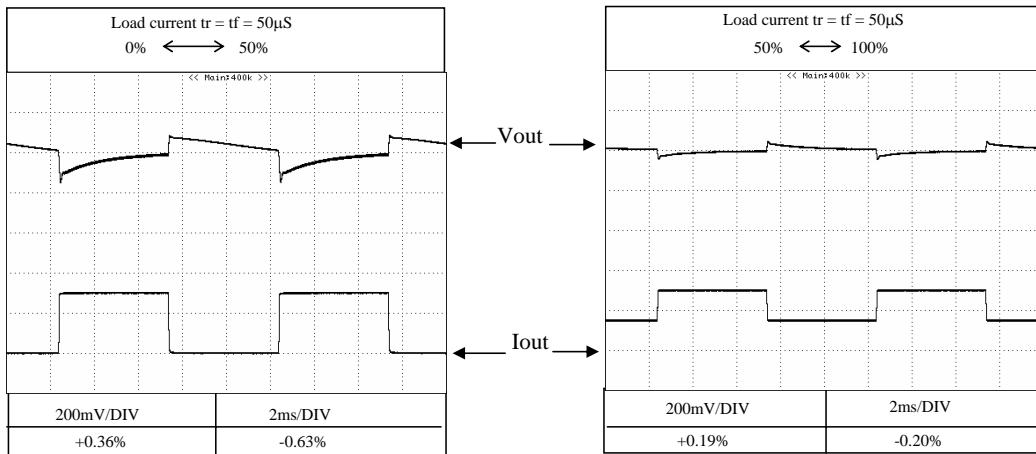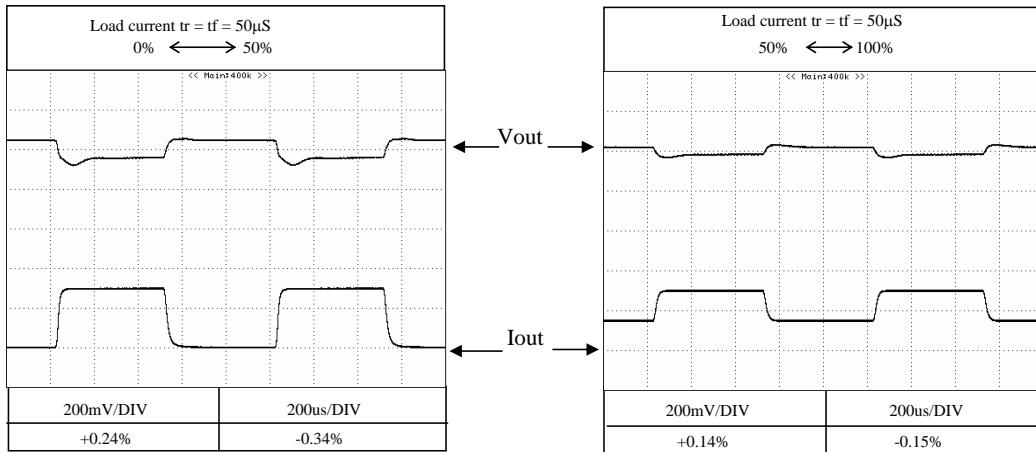f=100Hzf=1KHz

2-10 Response to Brown Out Characteristics


Conditions:

Vin : 115VAC


Iout : 100%

Ta : 25°C


5V

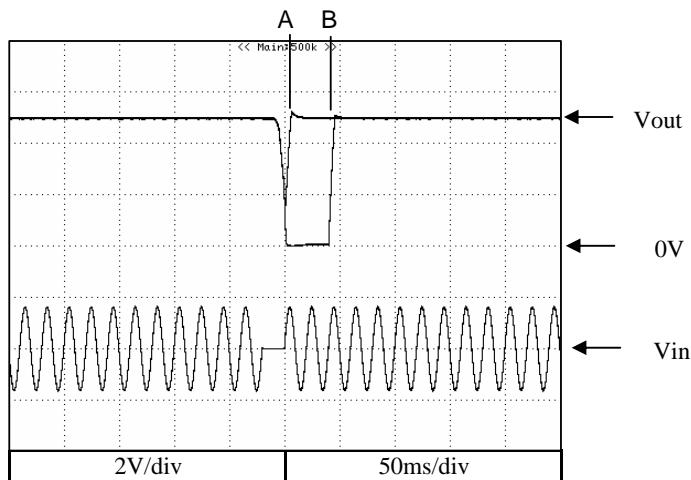A = 20.0 ms
B = 60.0 ms

12V

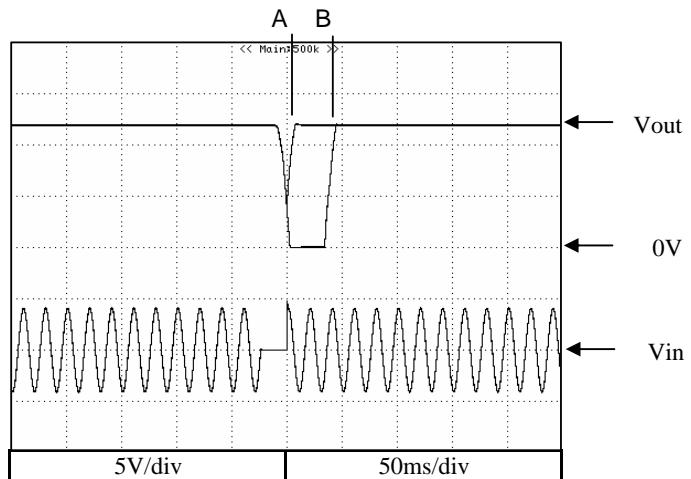A = 23.5 ms
B = 58.0 ms

24V

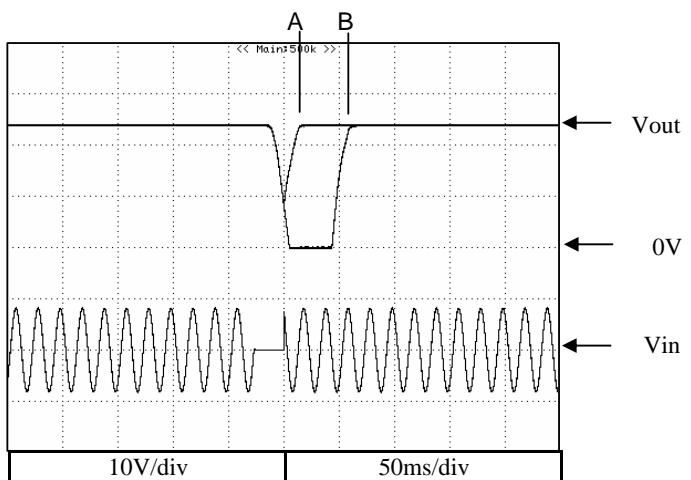A = 27.0 ms
B = 70.0 ms


2-10 Response to Brown Out Characteristics

Conditions:



Vin : 230VAC

Iout : 100%



Ta : 25°C




A = 91.5 ms
B = 120.0 ms

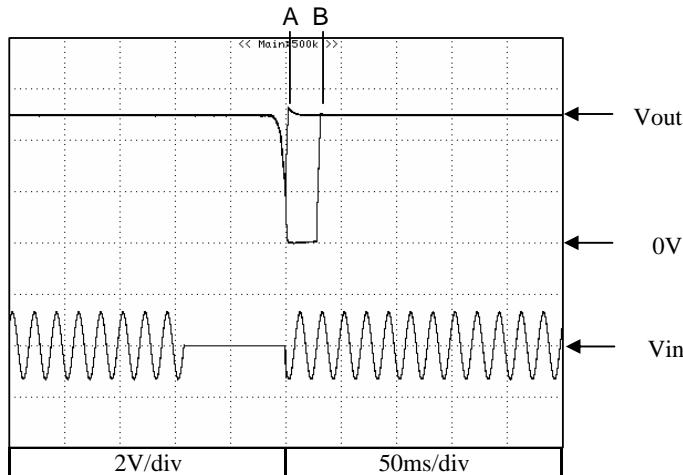

A = 97.0 ms
B = 125.0 ms

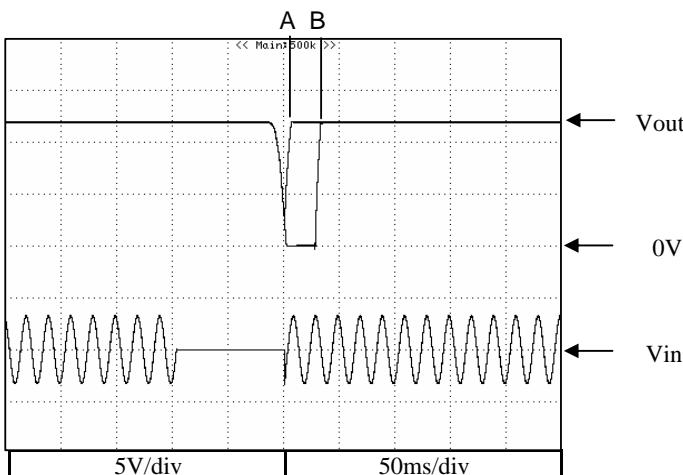



A = 100 ms
B = 130 ms

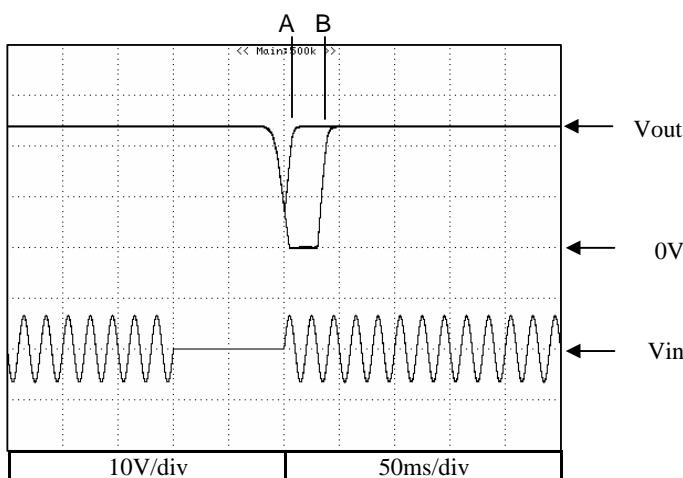

2-11 Inrush Current

Conditions : Vin = 115VAC
Iout = 100%
Ta = 25°C



5V

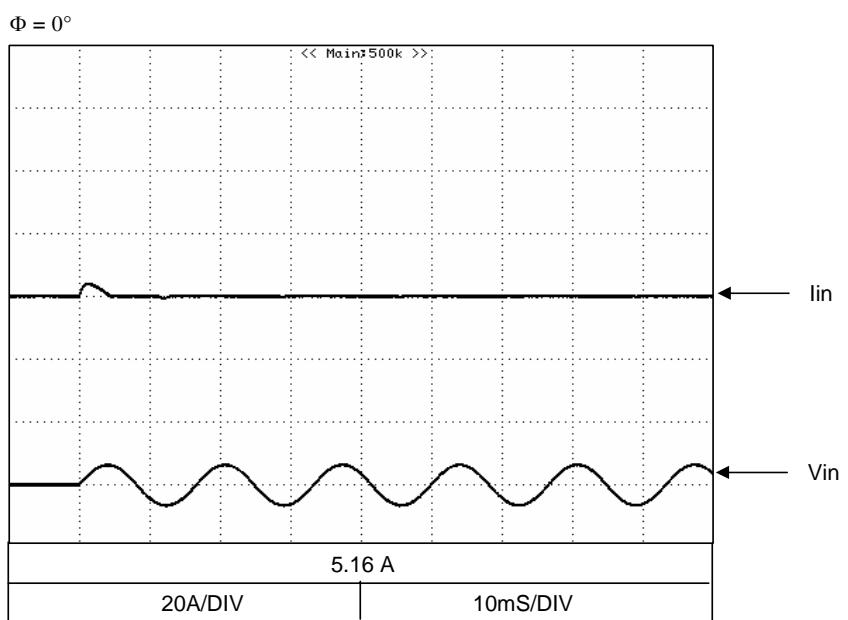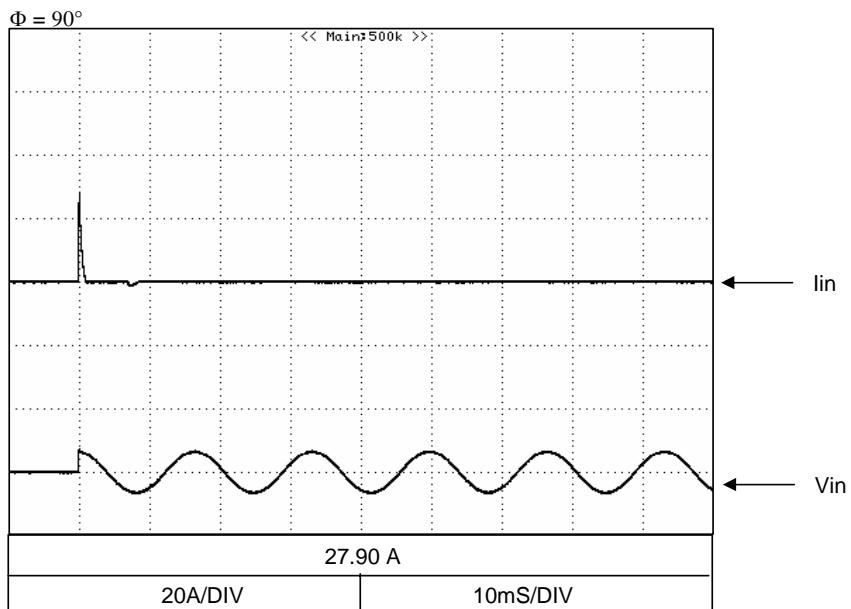

2-11 Inrush Current

Conditions : Vin = 230VAC
Iout = 100%
Ta = 25°C


5V

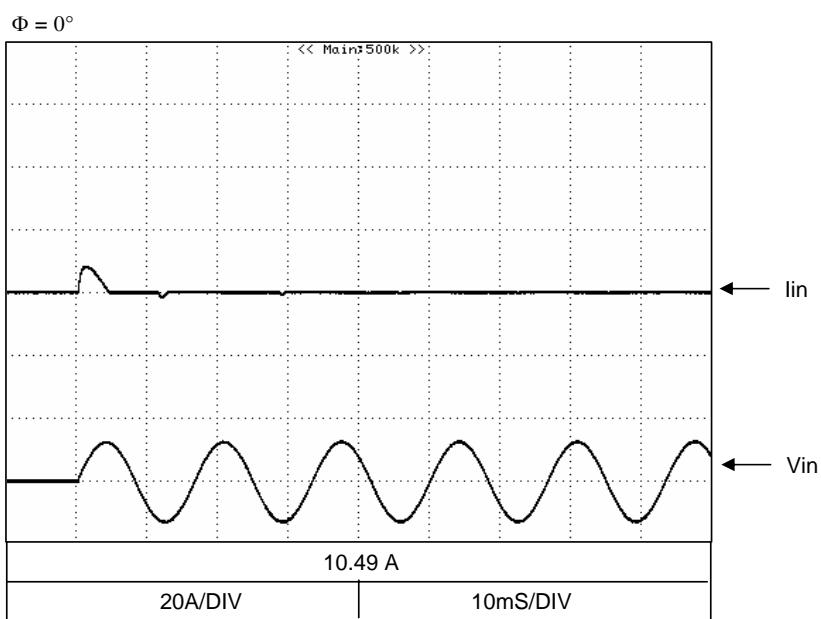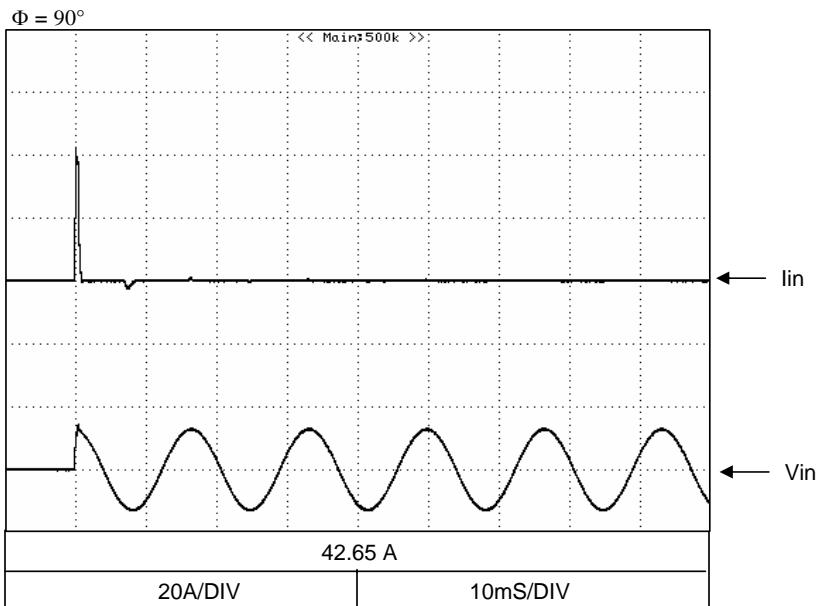

2-12 Input Current Harmonics

Conditions :
Vin = 230VAC
Iout = 100%
Ta = 25°C
F = 60Hz

5V

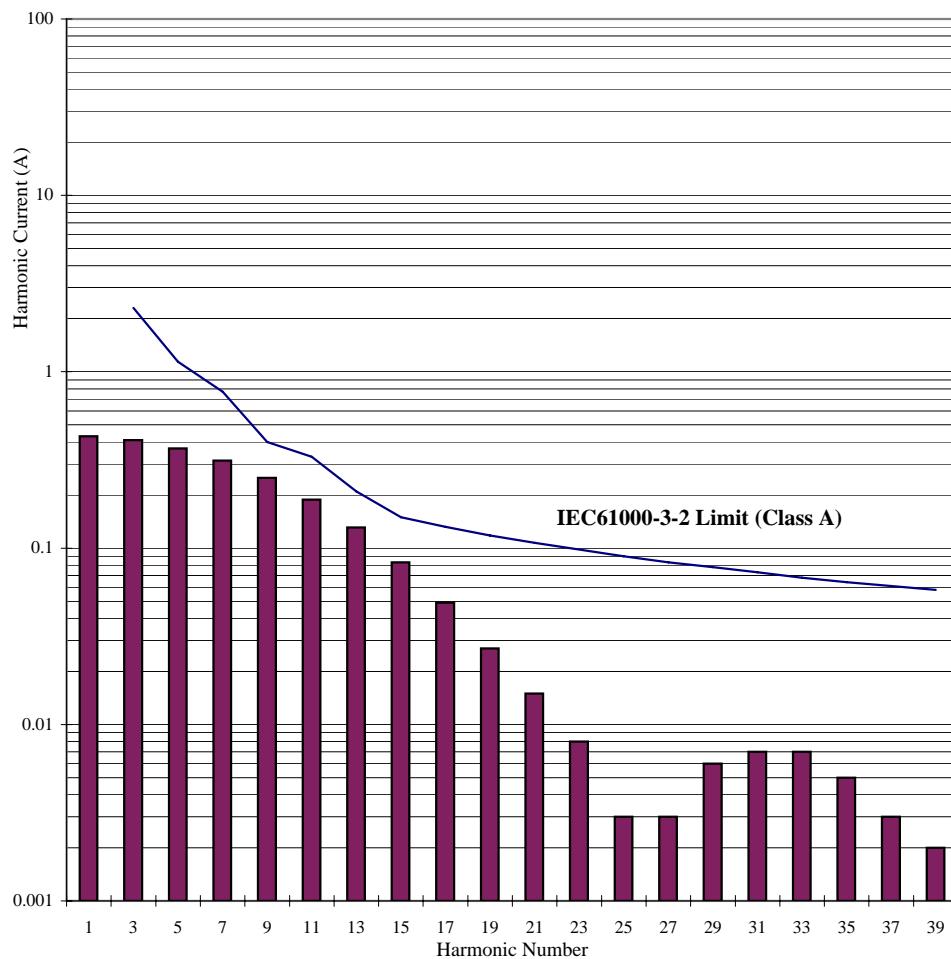


2-13 Leakage Current Characteristics


Conditions :

- Iout = 0% ———
- = 100% -----
- Ta = 25°C
- f = 50Hz


5V

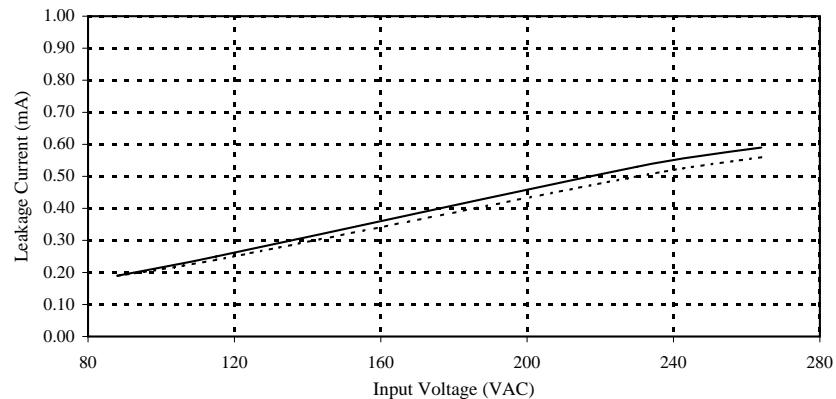

12V

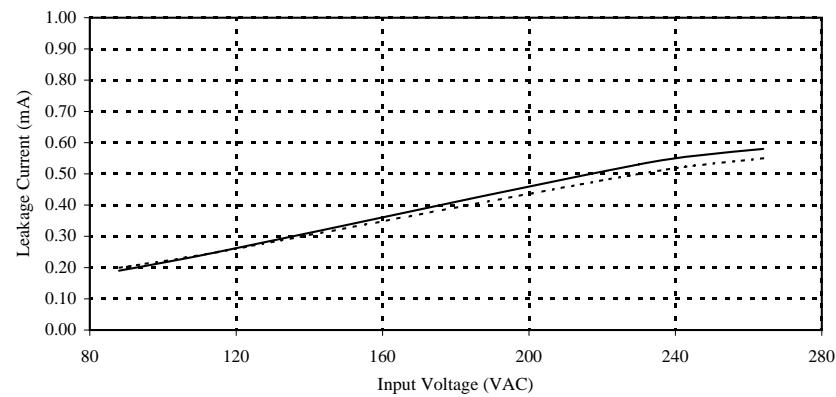

24V

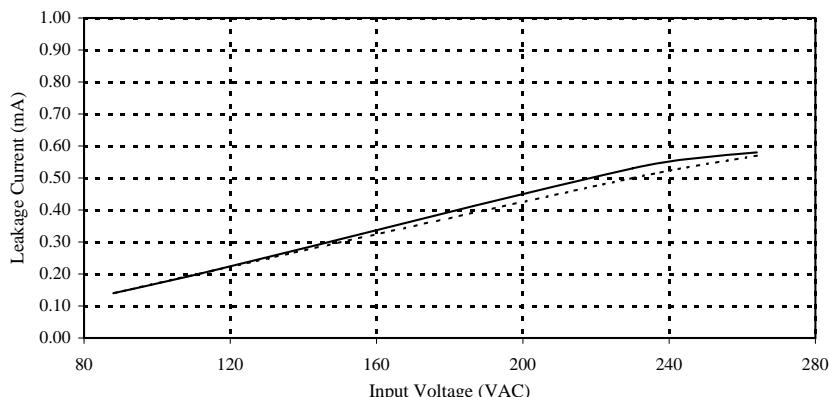


2-14 Output Ripple And Noise Waveform

Conditions


V_{in} = 230VAC
 I_{out} = 100%
 T_a = 25°C

NORMAL MODE


5V

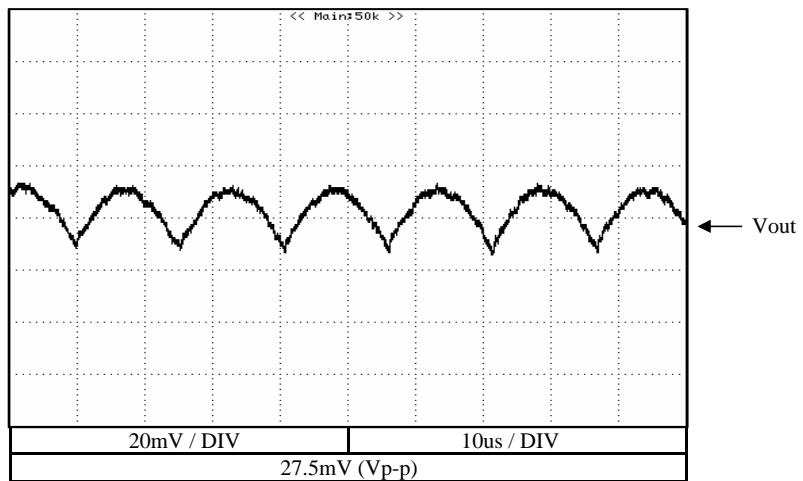

12V

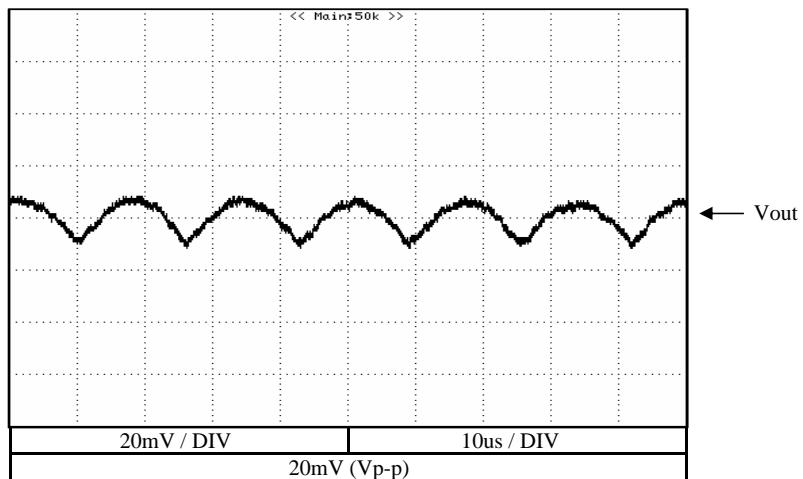

24V

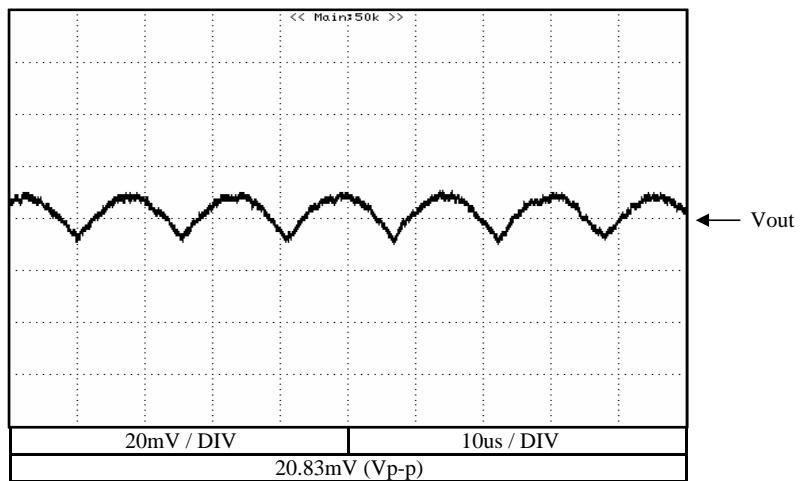


2-14 Output Ripple And Noise Waveform

Conditions


V_{in} = 230VAC
I_{out} = 100%
T_a = 25°C

NORMAL + COMMON MODE


5V

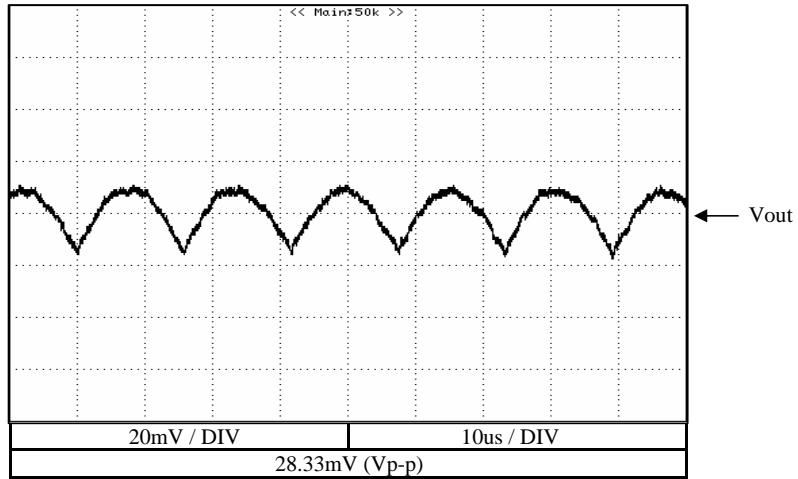

12V

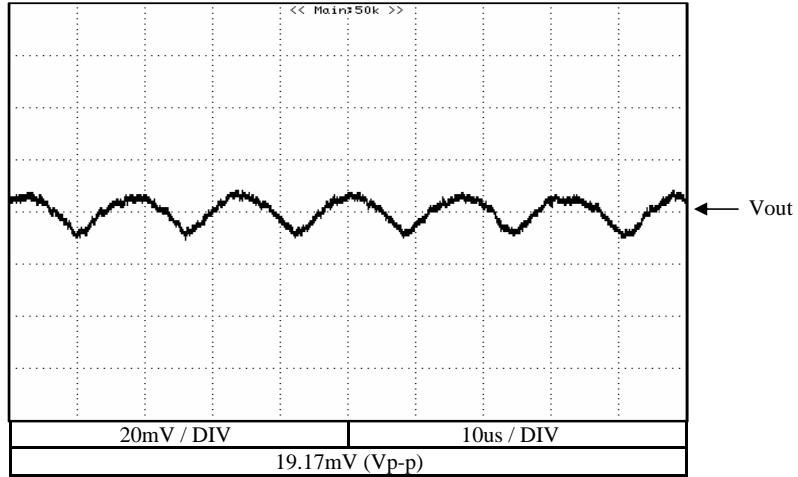

24V

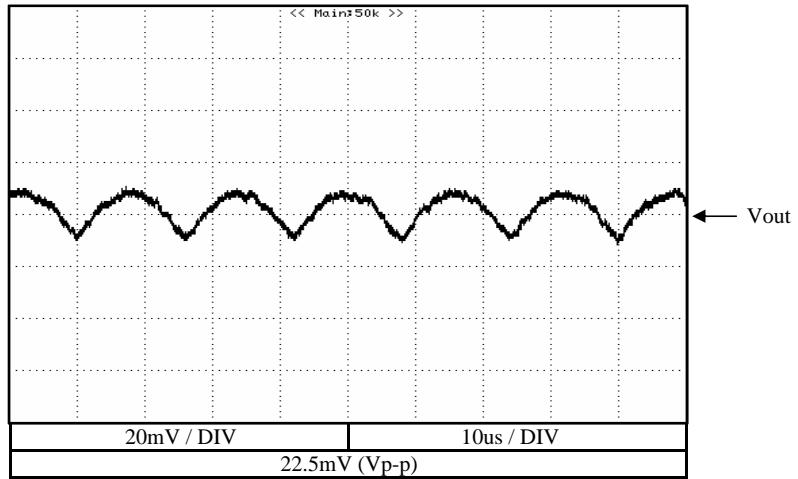


2-15 Electro-Magnetic Interference characteristics


Conditions: Vin : 115VAC
Iout : 100%

Conducted Emission

5V

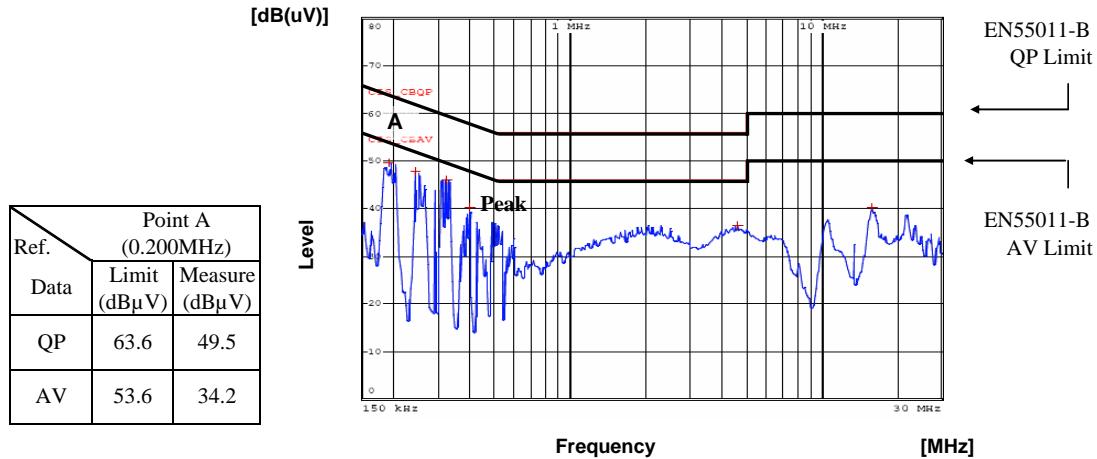

Phase : N

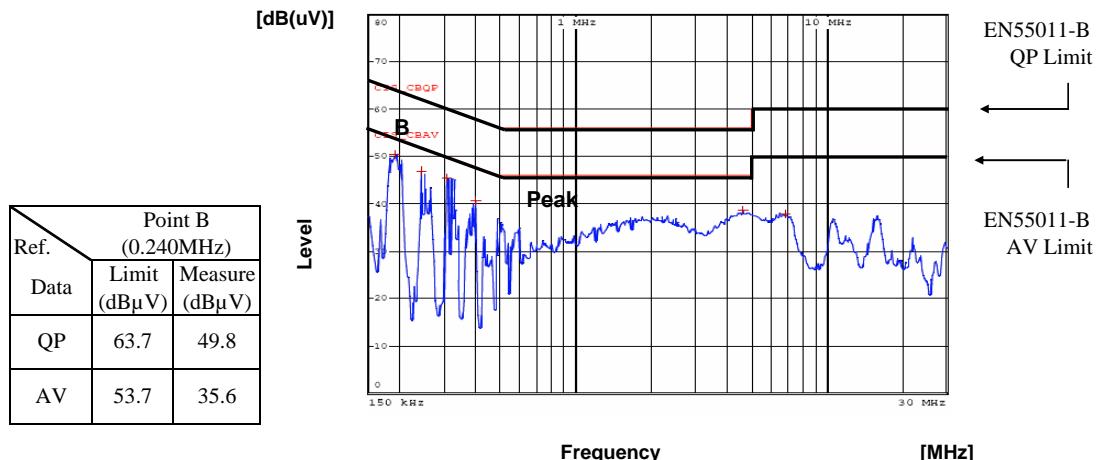


Phase : L

2-14 Electro-Magnetic Interference characteristics


Conditions: Vin : 230VAC
Iout : 100%

Conducted Emission

5V

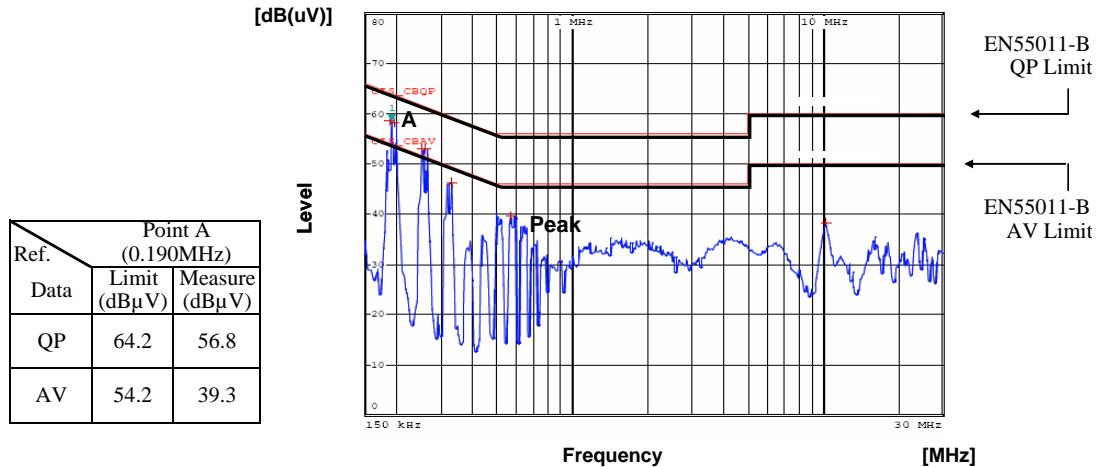

Phase : N

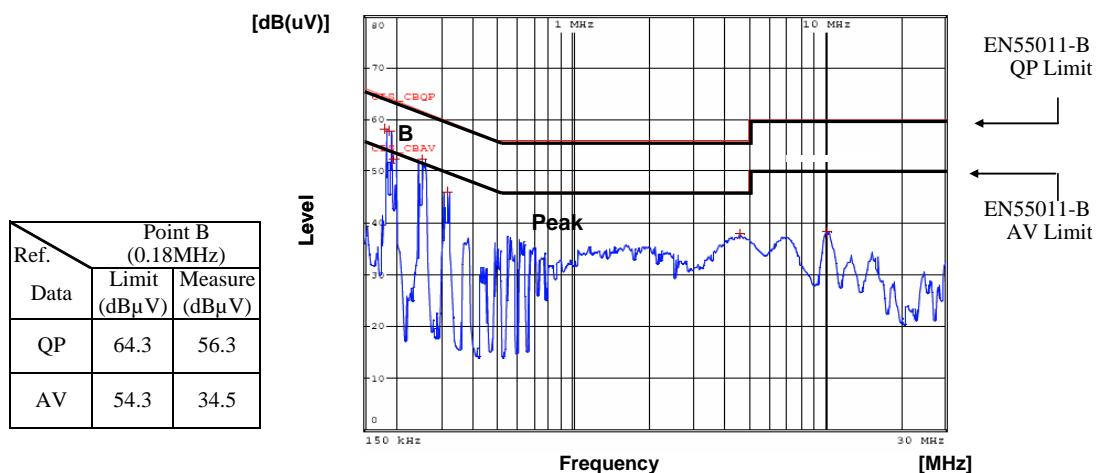



Phase : L

2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC
Iout : 100%

Conducted Emission

12V

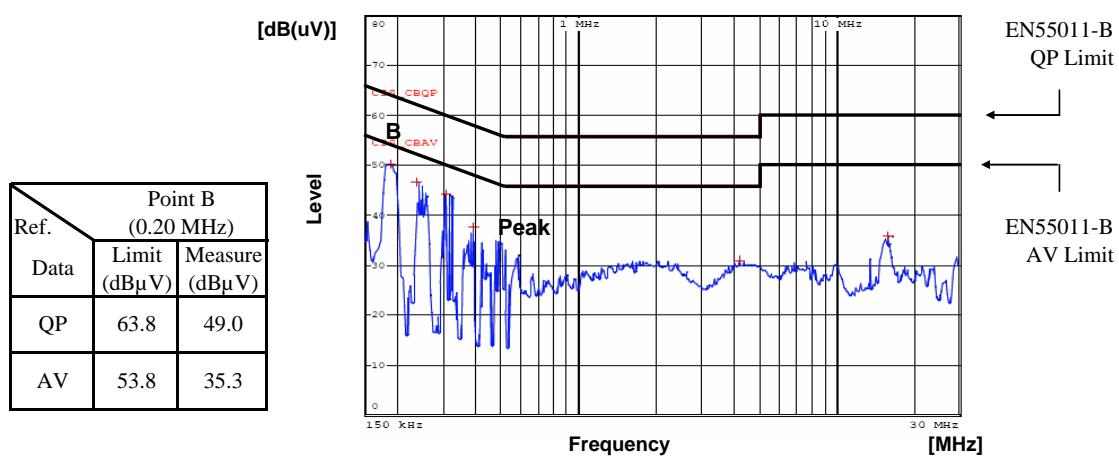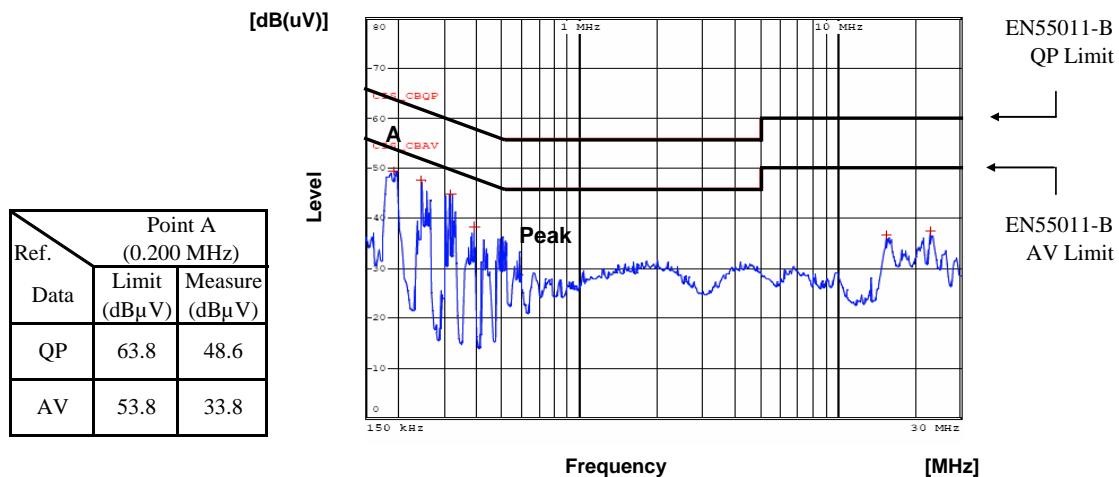


2-14 Electro-Magnetic Interference characteristics


Conditions: Vin : 230VAC
Iout : 100%

Conducted Emission

12V

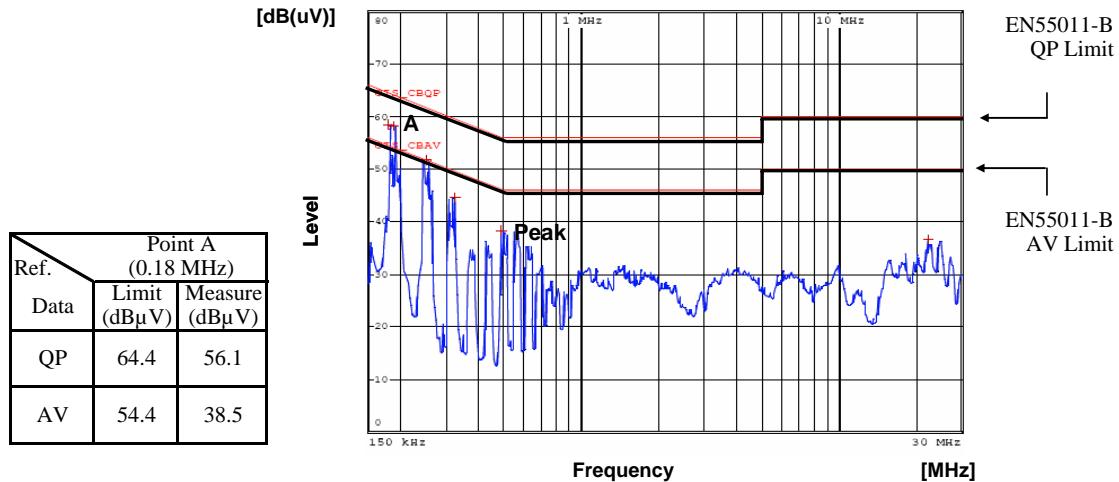

Phase : N

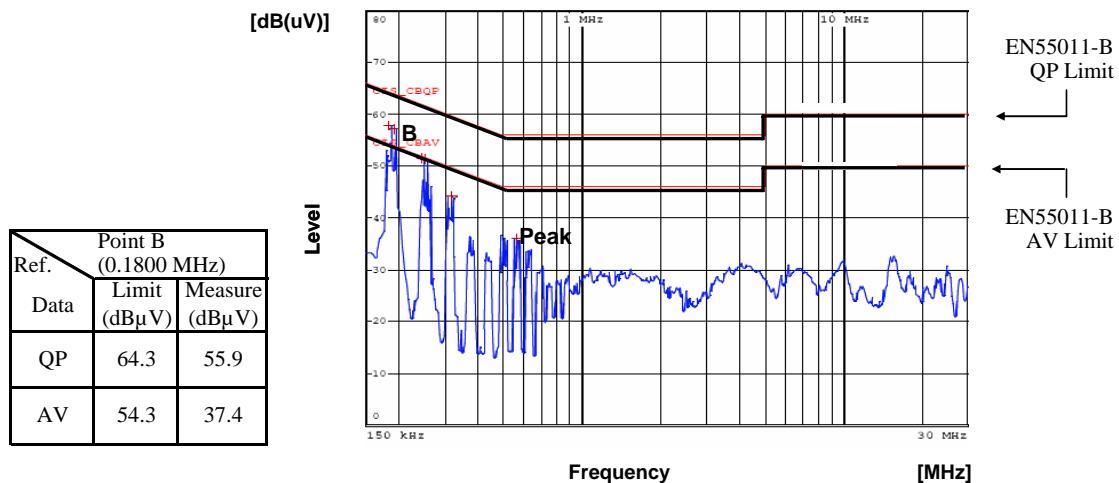



Phase : L

2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC
Iout : 100%

Conducted Emission

24V

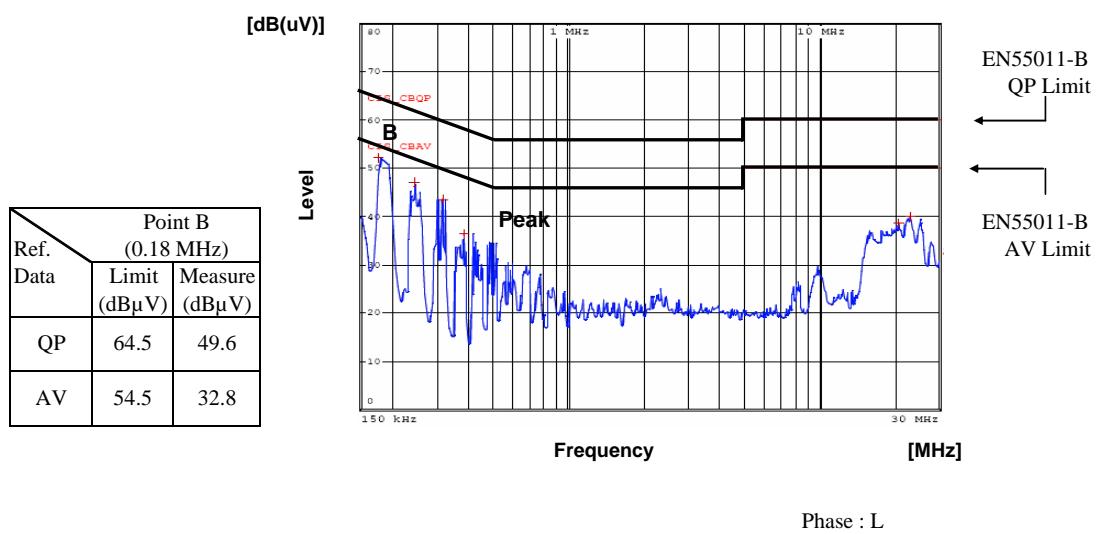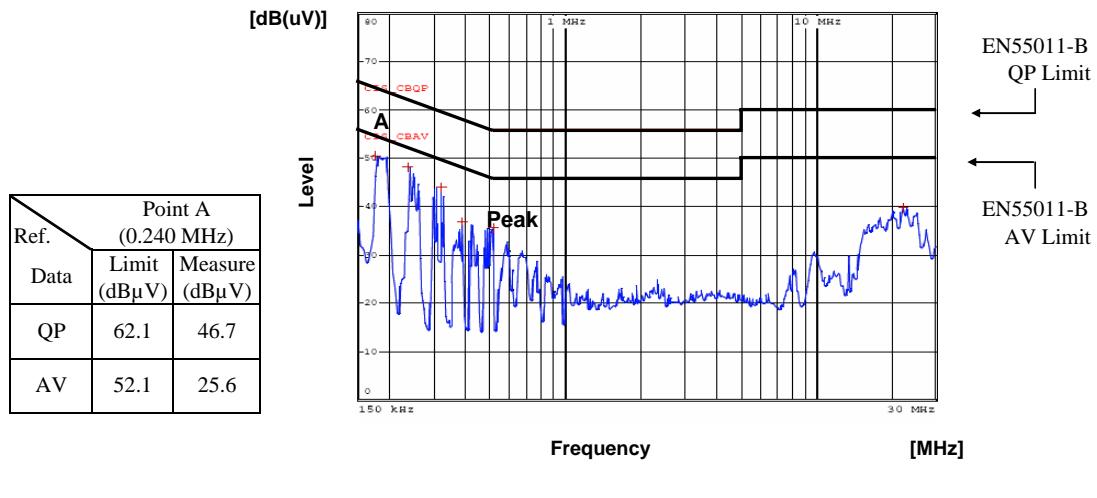


2-14 Electro-Magnetic Interference characteristics


Conditions:
Vin : 230VAC
Iout : 100%

Conducted Emission

24V

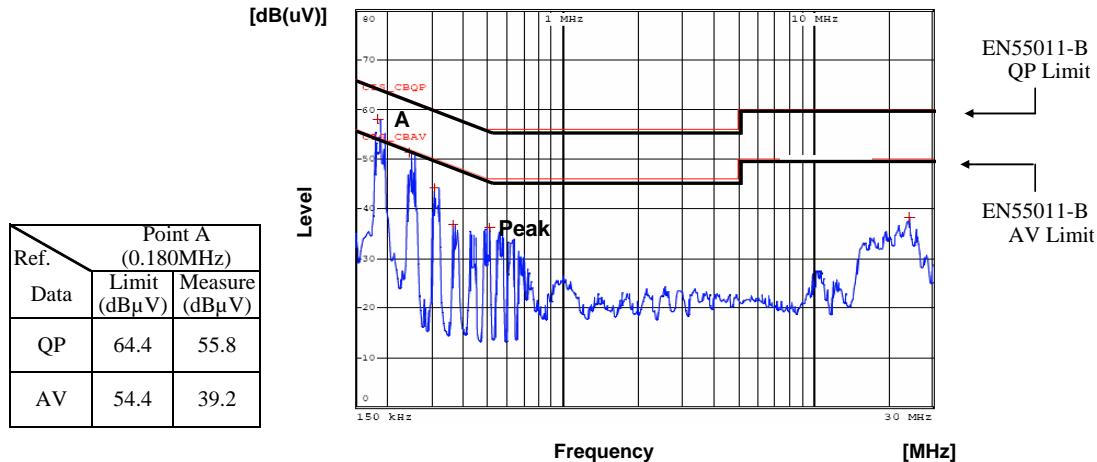

Phase : N

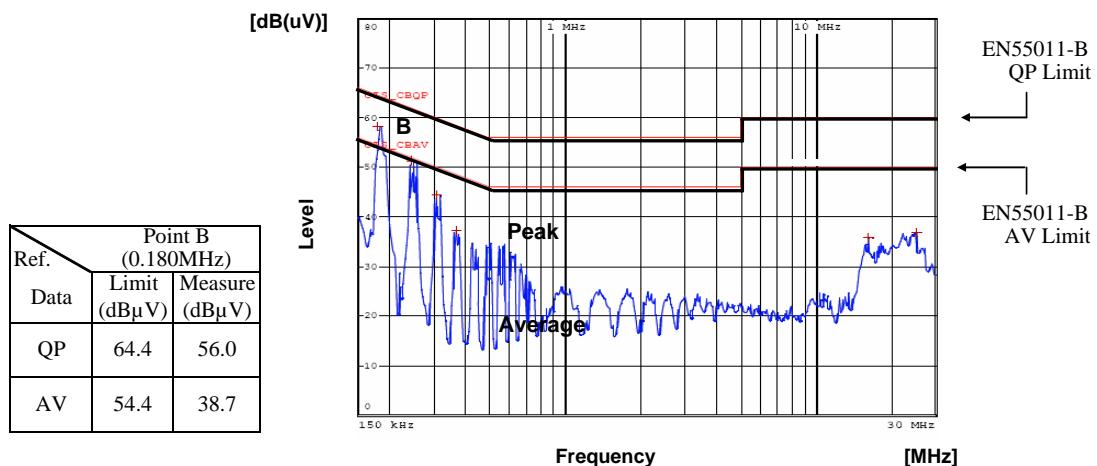

Phase : L

2-15 Electro-Magnetic Interference characteristics



Conditions:

Vin : 115VAC

Iout : 100%

Radiated Emission

5V

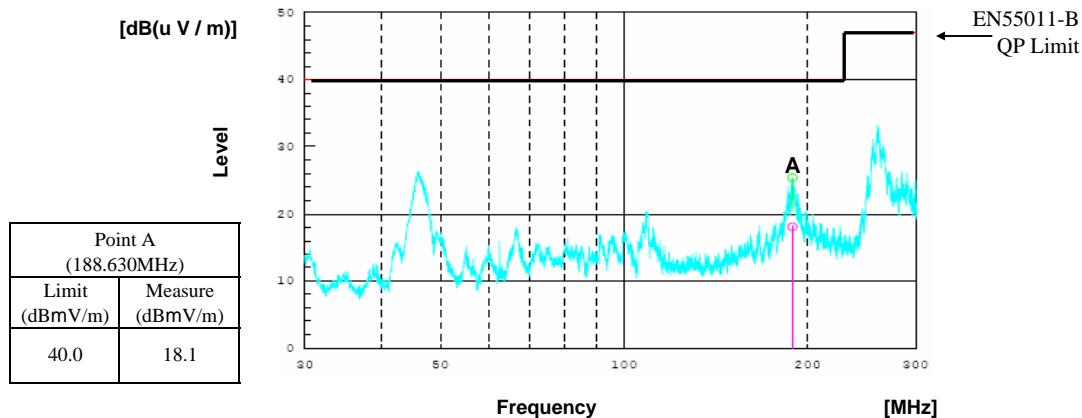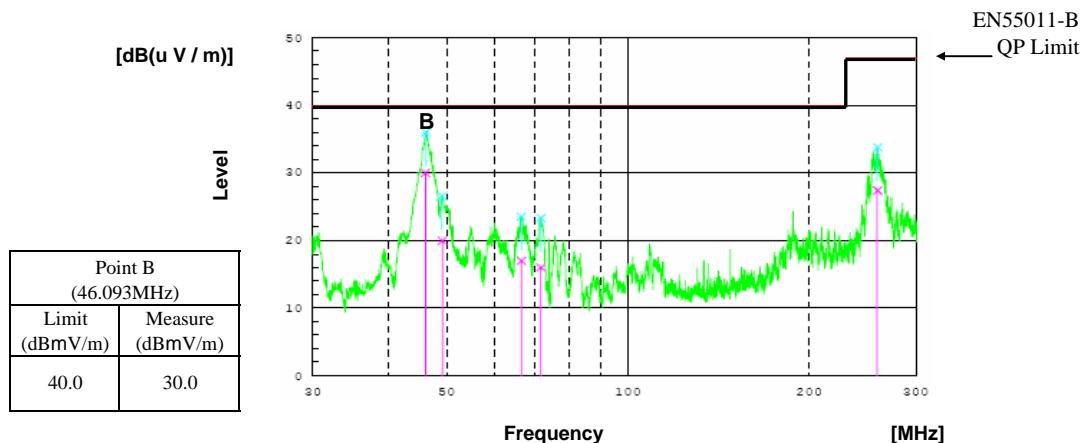HORIZONTAL**VERTICAL**

2-15 Electro-Magnetic Interference characteristics



Conditions:

Vin : 230VAC

Iout : 100%

Radiated Emission

5V

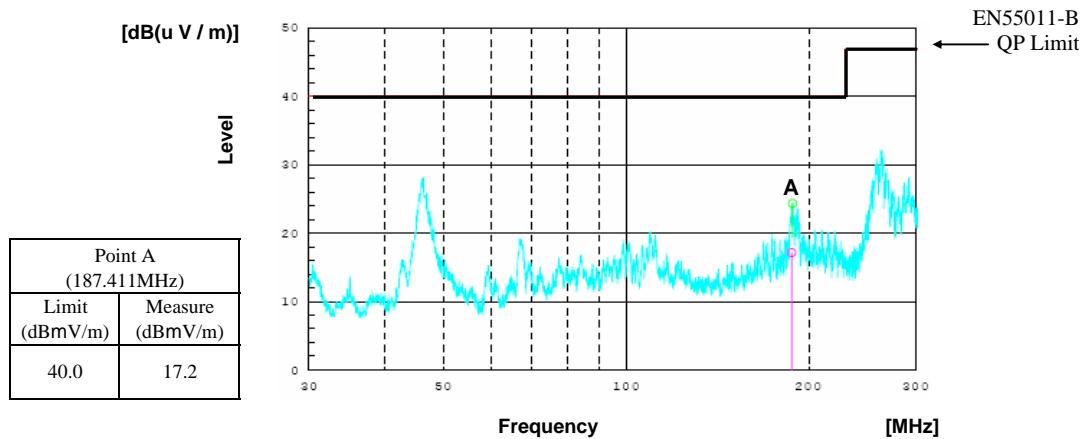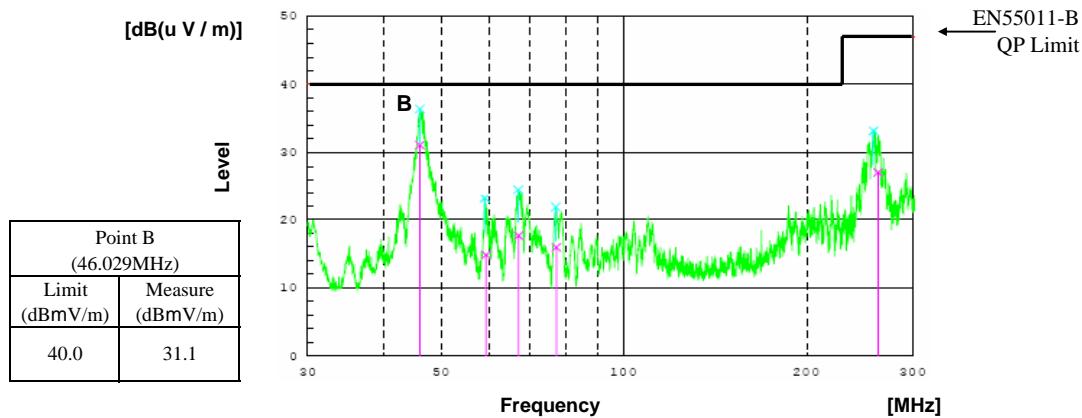HORIZONTAL**VERTICAL**

2-15 Electro-Magnetic Interference characteristics



Conditions:

Vin : 115VAC

Iout : 100%

Radiated Emission

12V

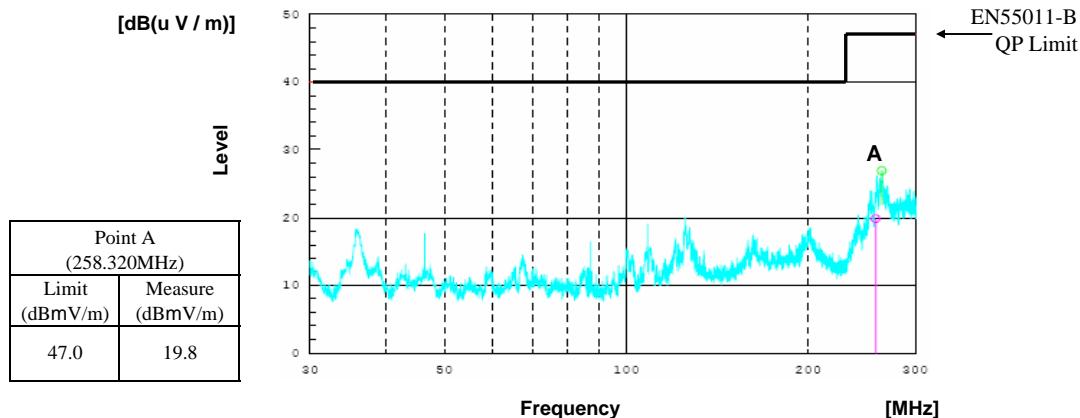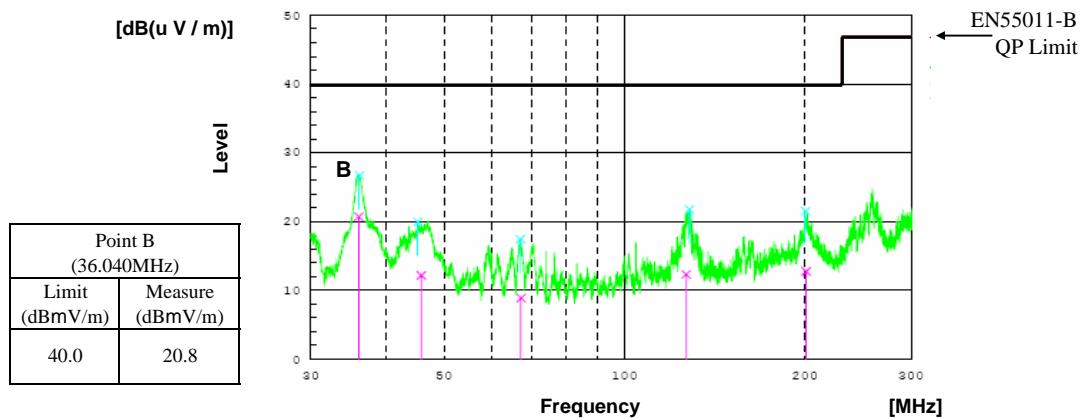HORIZONTAL**VERTICAL**

2-15 Electro-Magnetic Interference characteristics



Conditions:

Vin : 230VAC

Iout : 100%

Radiated Emission

12V

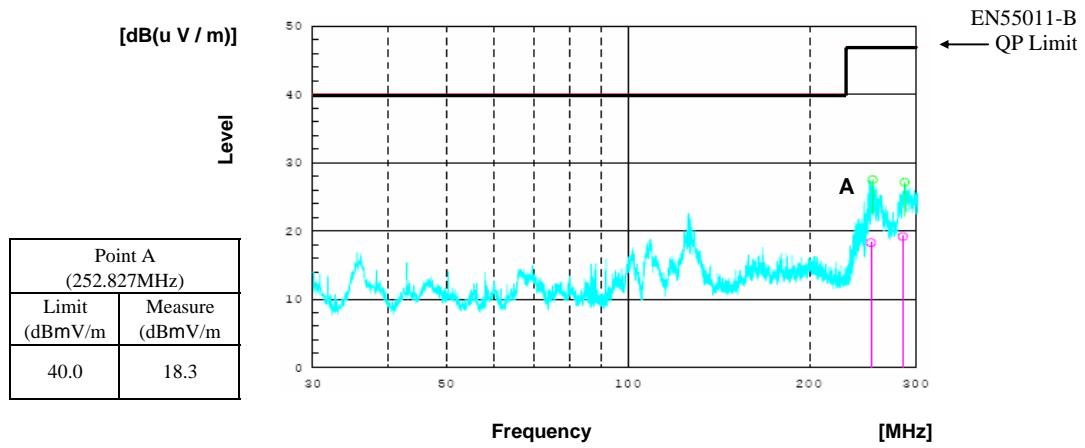
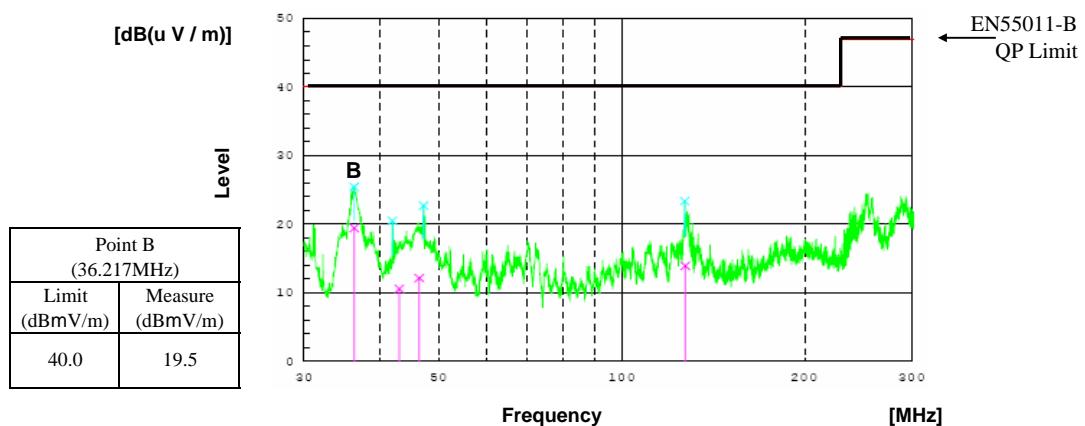
HORIZONTAL**VERTICAL**

2-15 Electro-Magnetic Interference characteristics

Conditions:
Vin : 115VAC
Iout : 100%

Radiated Emission

24V

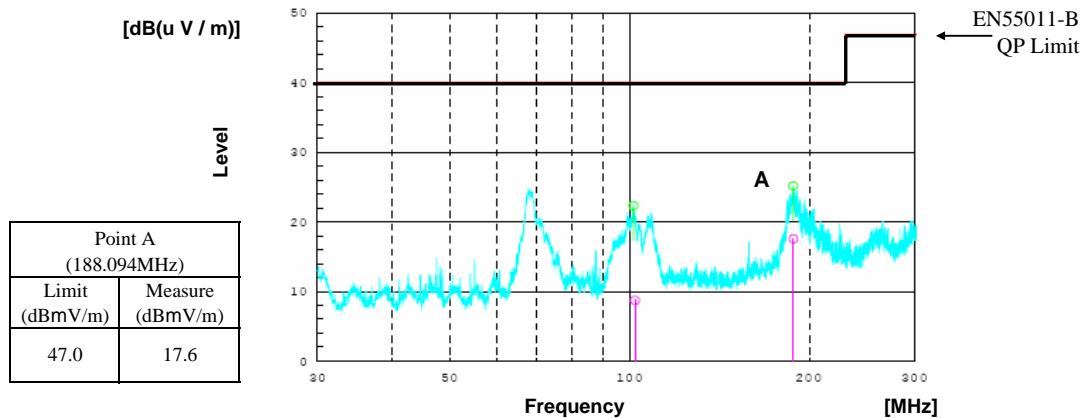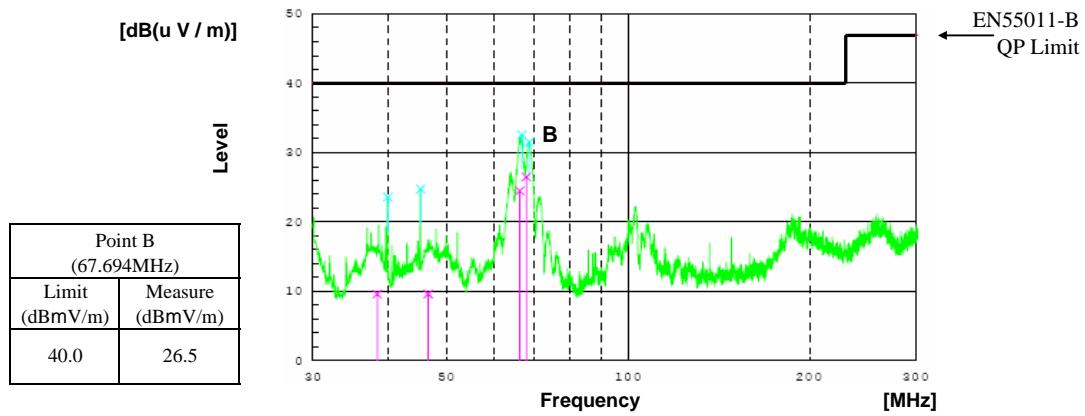HORIZONTAL**VERTICAL**

2-15 Electro-Magnetic Interference characteristics


Conditions:

Vin : 230VAC

Iout : 100%

Radiated Emission

24V

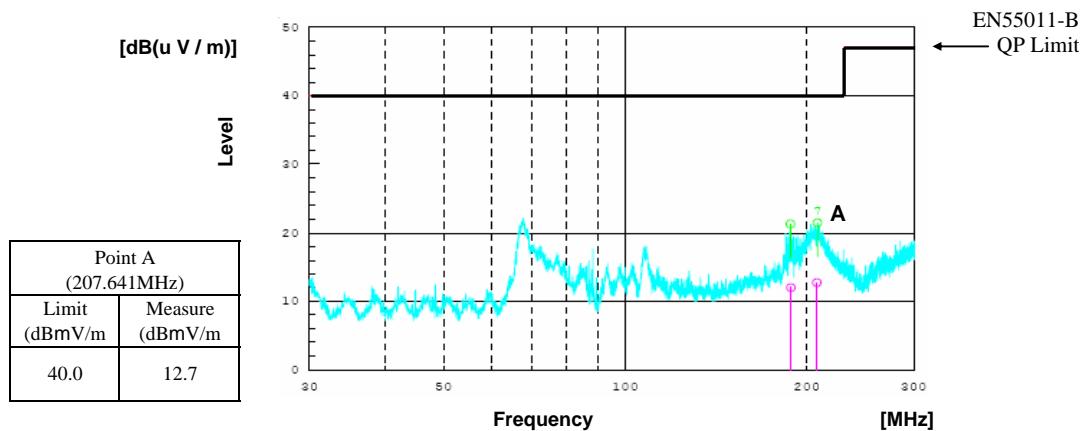HORIZONTAL**VERTICAL**