

# LS75

## EVALUATION DATA

DWG.No PA583-53-01		
APPD	CHK	DWG
<i>ZPB</i> 7 Apr 08	<i>Revised</i> 7-Apr-08	<i>Zh</i> 07 April 08

DENSEI-LAMBDA

INDEX

1. Evaluation Method	PAGE
1-1 Circuit used for determination . . . . .	T-1~5
(1) Steady state data	
(2) Warm up voltage drift characteristics	
(3) Over current protection (OCP) characteristics	
(4) Over voltage protection (OVP) characteristics	
(5) Output rise characteristics	
(6) Output fall characteristics	
(7) Response to brown out characteristics	
(8) Dynamic line response characteristics	
(9) Dynamic load response characteristics	
(10) Inrush current characteristics	
(11) Leakage current characteristics	
(12) Output ripple and noise waveform	
(13) Electro-Magnetic Interference characteristics	
1-2 List of equipment used . . . . .	T-6
2. Characteristics	
2-1 Steady state data	
(1) Regulation - line and load, temperature drift . . . . .	T-7
(2) Output voltage and Ripple voltage vs. input voltage . . . . .	T-8
(3) Efficiency and Input current vs. Output current . . . . .	T-9
2-2 Warm up voltage drift characteristics . . . . .	T-10
2-3 Over current protection (OCP) characteristics . . . . .	T-11
2-4 Over voltage protection (OVP) characteristics . . . . .	T-14
2-5 Output rise characteristics . . . . .	T-15
2-6 Output fall characteristics . . . . .	T-17
2-7 Hold up time characteristics . . . . .	T-19
2-8 Dynamic line response characteristics . . . . .	T-20
2-9 Dynamic load response characteristics . . . . .	T-21
2-10 Response to brown out characteristics . . . . .	T-28
2-11 Inrush current waveform . . . . .	T-29
2-12 Input current harmonics . . . . .	T-31
2-13 Leakage current characteristics . . . . .	T-32
2-14 Output ripple and noise waveform . . . . .	T-33
2-15 Electro-Magnetic Interference characteristics . . . . .	T-35


Terminology Used

	Definition
Vin	. . . . . Input voltage
Vout	. . . . . Output Voltage
Iin	. . . . . Input Current
Iout	. . . . . Output Current
Ta	. . . . . Ambient temperature

1. Evaluation Method


1-1 Circuit used for determination

(1) Steady state data

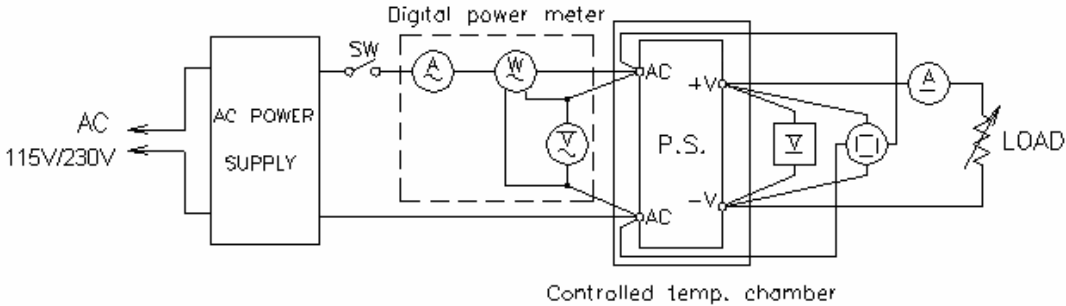


(2) Warm up voltage drift characteristics  
Same as Steady state data

(3) Over current protection (OCP) characteristics

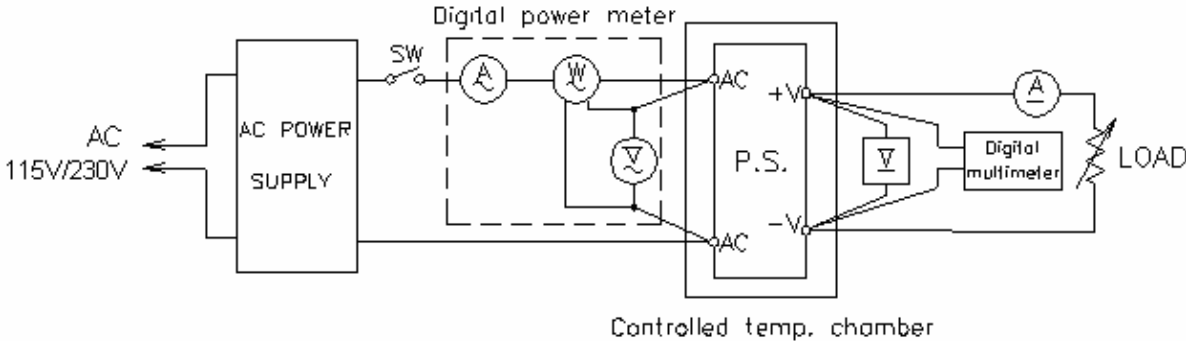


(4) Over voltage protection (OVP) characteristics  
Same as Steady state data

(5) Output rise characteristics

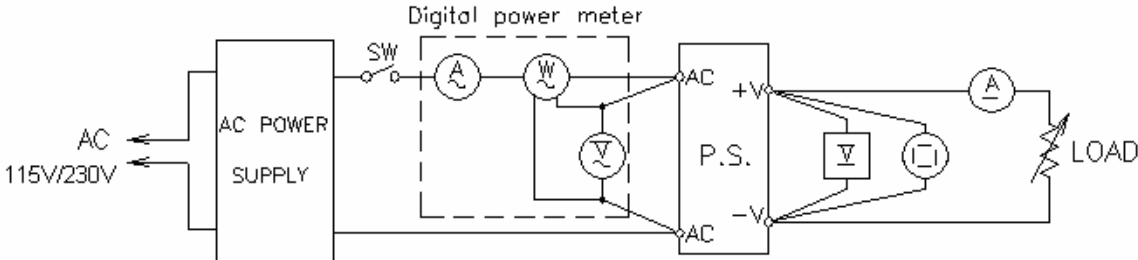




- (6) Output fall characteristics  
Same as Output rise characteristics

- (7) Response to brown out characteristics

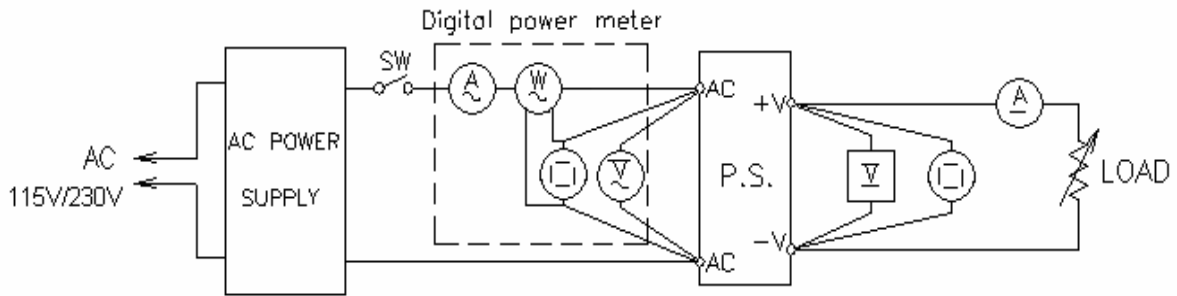


- (8) Dynamic line characteristics  
Same as Response to brown out characteristics.


- (9) Dynamic load response characteristics

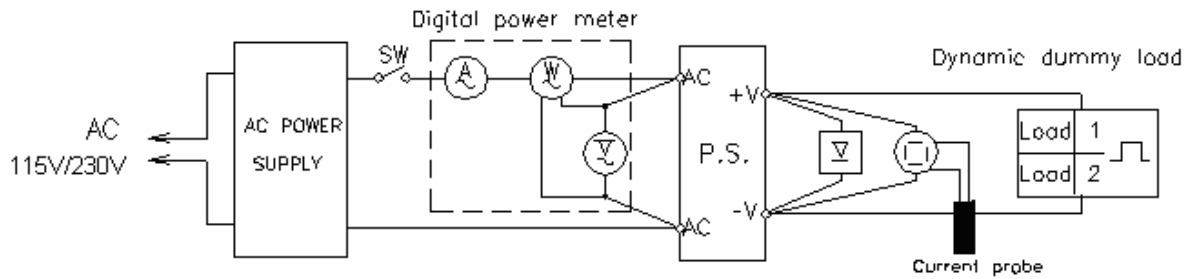

(10) Inrush current characteristics

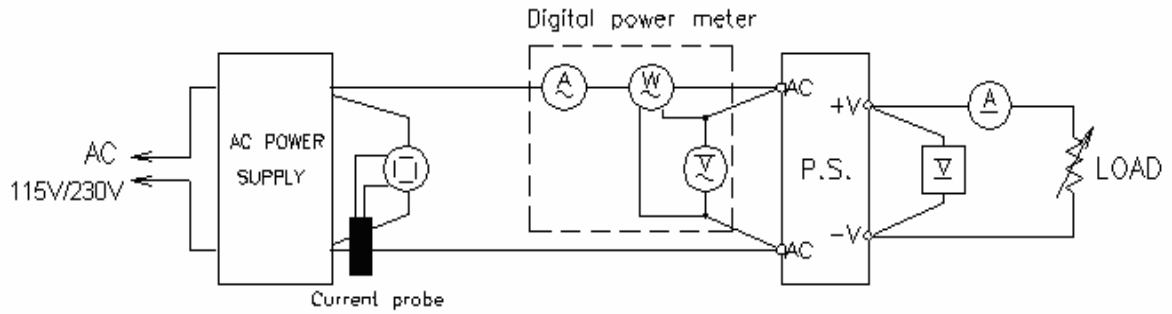


(11) Leakage current characteristics

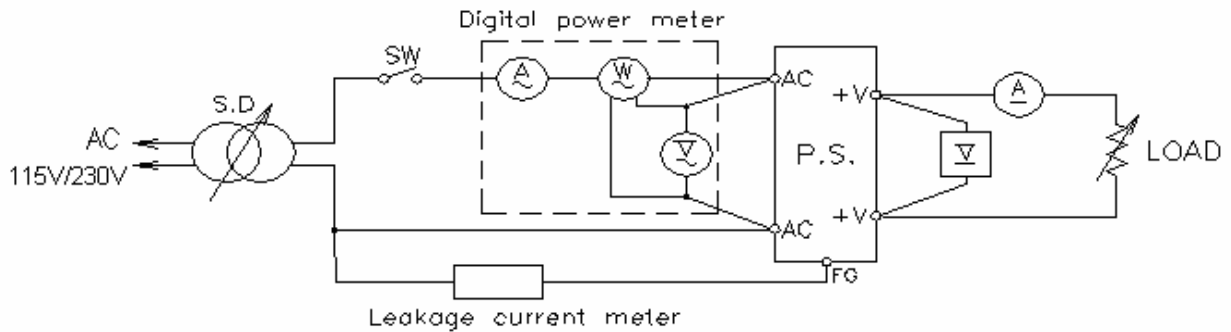


Range used---AC (For SIMPSON TYPE 228)

(12) Output ripple and noise waveform

(a) Normal Mode (using a 12" twisted pair terminated with 0.1uF and 47uF capacitor at 20MHz)

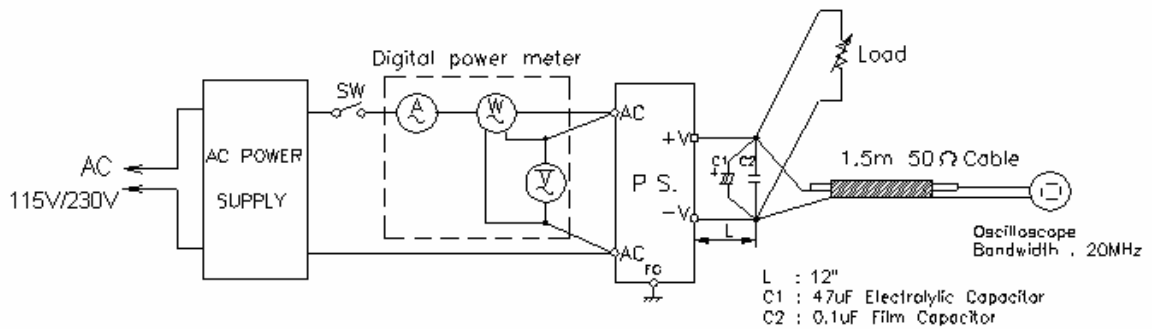


(b) Normal +Common Mode

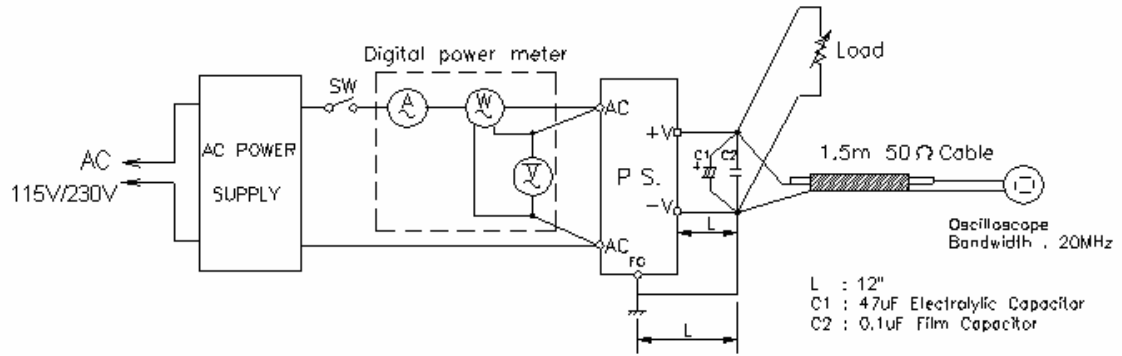


(13) Electro-Magnetic Interference characteristics

(a) Conducted Emission Noise

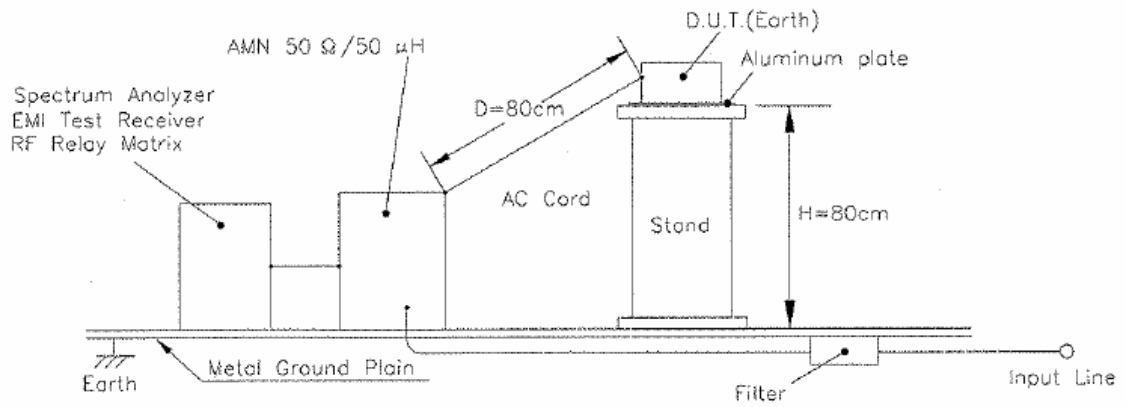

(b) Radiated Emission Noise

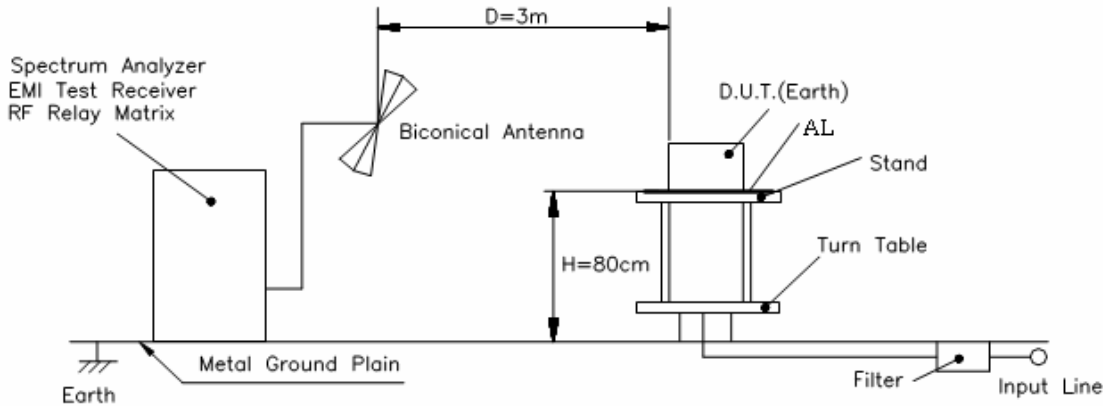

**1-2 List of equipment used**

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	DIGITAL STORAGE OSCILLOSCOPE	YOKOGAWA	DL1740/DL1740E
2	DIGITAL MULTIMETER	FLUKE	89 VI
3	DIGITAL POWER METER	YOKOGAWA	WT210
4	CURRENT PROBE/AMPLIFIER	TEKTRONIX	TCP404XL/TCPA400
5	DYNAMIC DUMMY LOAD	CHROMA	63030/63201
6	DYNAMIC DUMMY LOAD	KIKUSUI	PLZ1004W
7	CONTROLLED TEMP. CHAMBER	ESPEC	SU-241
8	LEAKAGE CURRENT METER	SIMPSON	228
9	AC SOURCE	KIKUSUI	PCR-2000L
10	AC SOURCE	CHROMA	6530
11	POWER ANALYZER	CHROMA	6630
12	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI
13	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESI26
14	LISN	ROHDE&SCHWARZ	ENV216
15	ANTENNA	ROHDE&SCHWARZ	HL562



## 2. Characteristics

### 2-1 Steady state data

#### (1) Regulation - line and load, Temperature drift

5V

##### 1. Regulation-line and load

Condition Ta : 25°C

Iout \ Vin	88VAC	115VAC	230VAC	264VAC	line regulation	
0%	5.015	5.015	5.018	5.019	0.004V	0.080%
50%	5.007	5.007	5.008	5.008	0.001V	0.020%
100%	5.000	5.000	5.000	5.000	0.000V	0.000%
load regulation	0.015V	0.015V	0.018V	0.019V		
	0.300%	0.300%	0.360%	0.380%		

##### 2. Temperature drift

Conditions Vin = 115VAC

Iout = 100%

Ta	-25°C	25°C	50°C	temperature stability	
Vout	5.002V	5.000V	4.996V	0.006V	0.12%

12V

##### 1. Regulation-line and load

Condition Ta : 25°C

Iout \ Vin	88VAC	115VAC	230VAC	264VAC	line regulation	
0%	12.007	12.007	12.007	12.007	0.000V	0.000%
50%	12.001	12.002	12.002	12.002	0.001V	0.008%
100%	11.996	11.996	11.997	11.997	0.001V	0.008%
load regulation	0.011V	0.011V	0.010V	0.010V		
	0.092%	0.092%	0.083%	0.083%		

##### 2. Temperature drift

Conditions Vin = 115VAC

Iout = 100%

Ta	-25°C	25°C	50°C	temperature stability	
Vout	12.021V	11.996V	11.964V	0.057V	0.48%

24V

##### 1. Regulation-line and load

Condition Ta : 25°C

Iout \ Vin	88VAC	115VAC	230VAC	264VAC	line regulation	
0%	24.007	24.006	24.005	24.004	0.003V	0.013%
50%	23.999	23.998	23.998	23.998	0.001V	0.004%
100%	23.992	23.992	23.993	23.992	0.001V	0.004%
load regulation	0.015V	0.014V	0.012V	0.012V		
	0.063%	0.058%	0.050%	0.050%		

##### 2. Temperature drift

Conditions Vin = 115VAC




Iout = 100%

Ta	-25°C	25°C	50°C	temperature stability	
Vout	24.031V	23.992V	23.980V	0.051V	0.213%

2-1 Steady State Data

(2) Output Voltage And Ripple Voltage Vs Input Voltage

Condition : Iout = 100%  
 Ta = -25°C .....  
 = 25°C - - - -  
 = 50°C - . . . .

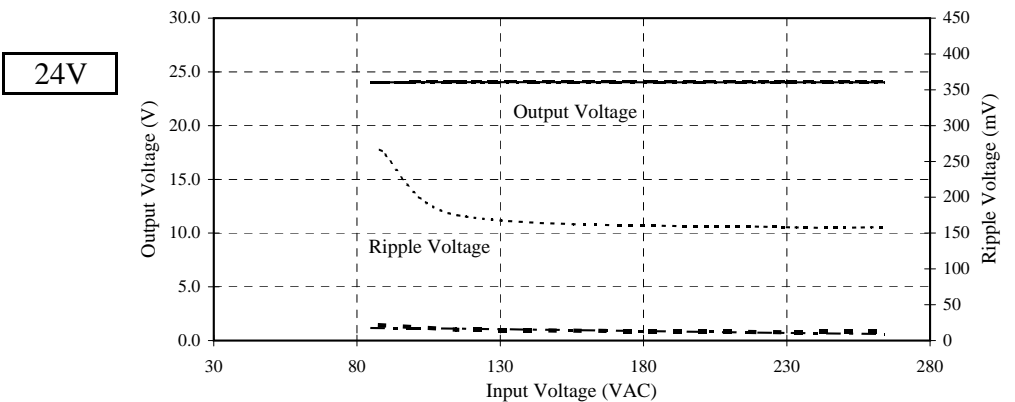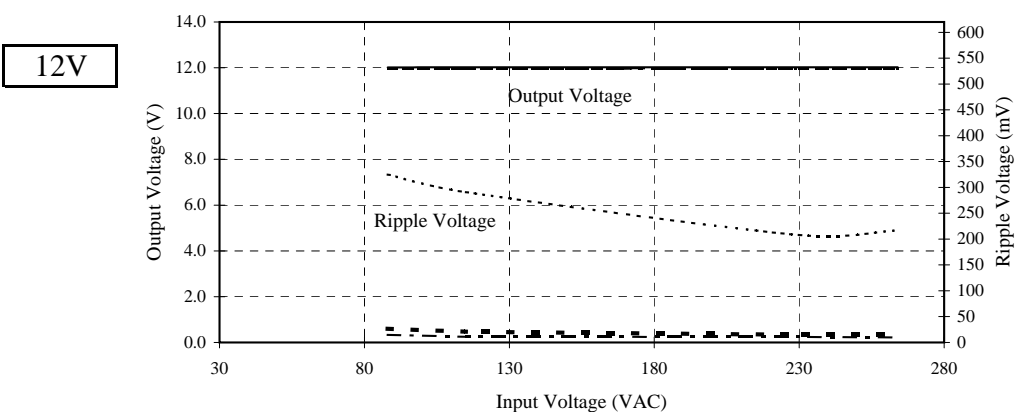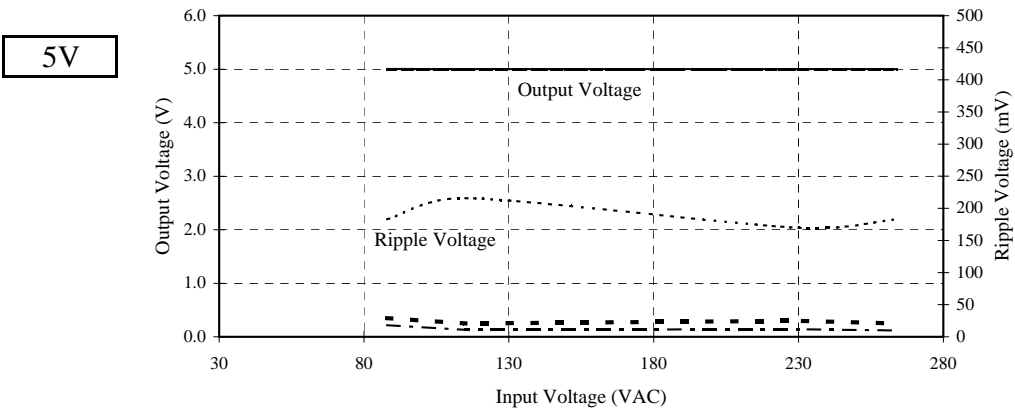


2-1 Steady State Data


(3) Efficiency And Input Current Vs Output Current

Conditions:  $T_a = 25^\circ\text{C}$   
 $V_{in} = 88\text{VAC}$   
 115VAC  
 230VAC  
 264VAC


5V

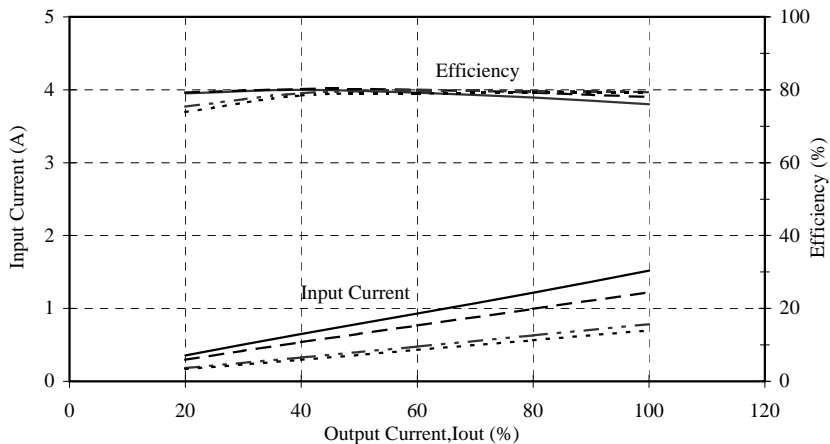

12V

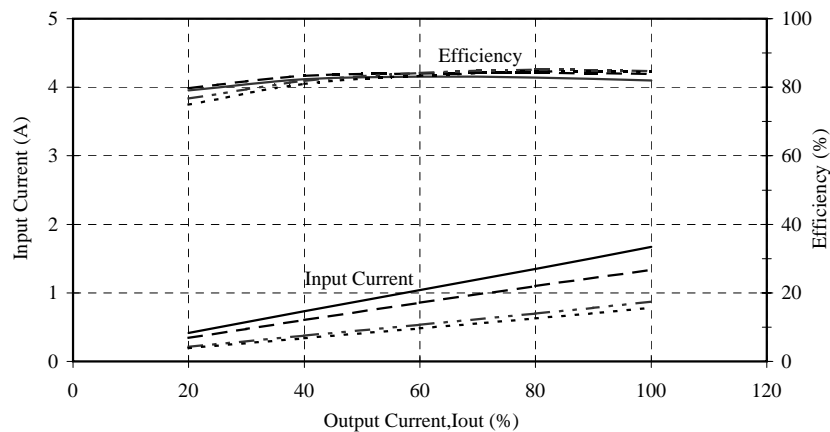


24V

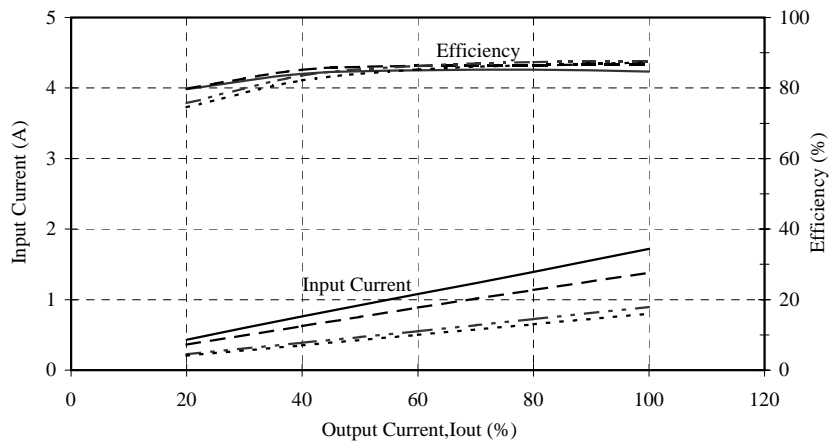


2-2 Warm up voltage drift characteristics

Conditions: Vin : 230VAC  
Iout : 100%  
Ta : 25°C


5V

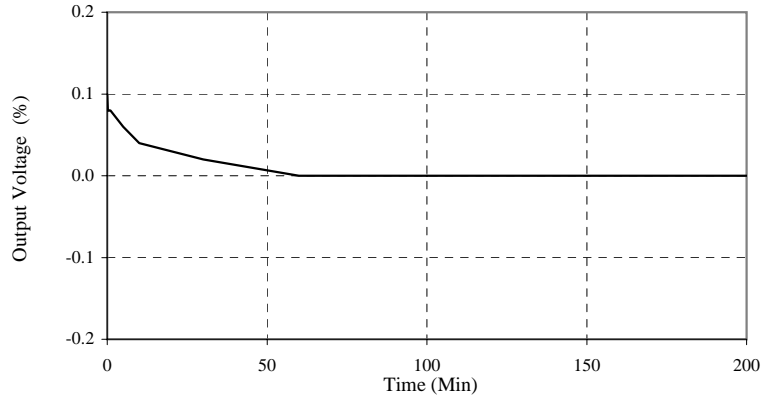

12V

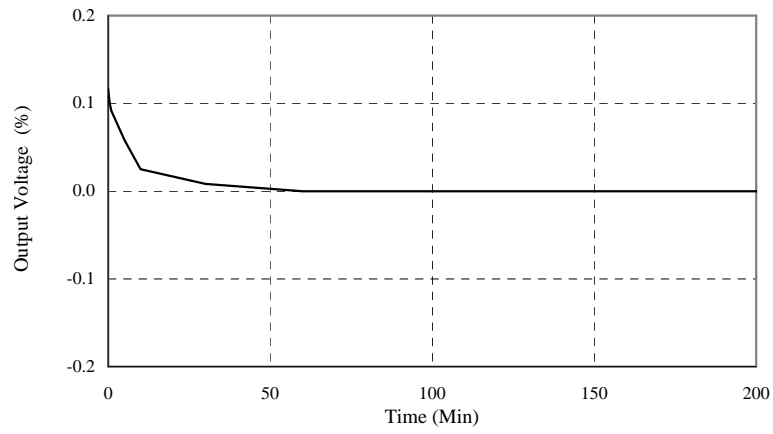


24V

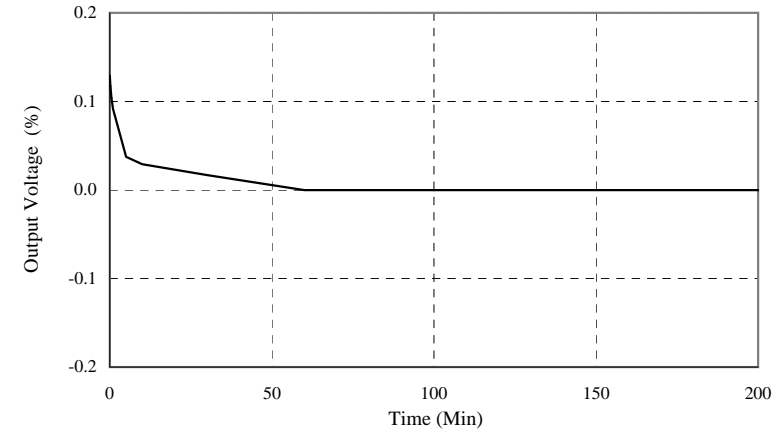


2-3 Over current protection (OCP) characteristics

Conditions: Vin : 88 VAC -----  
 115 VAC -.-.-.-.-  
 230 VAC —————  
 264 VAC -.-.-.-.-  
 Ta : 25°C


5V

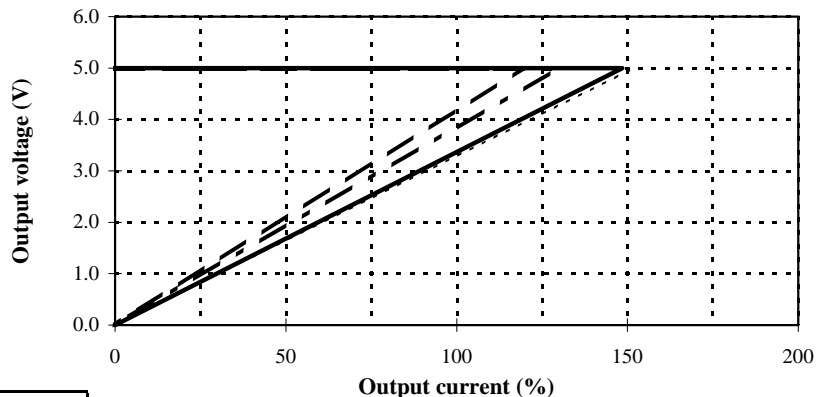

12V

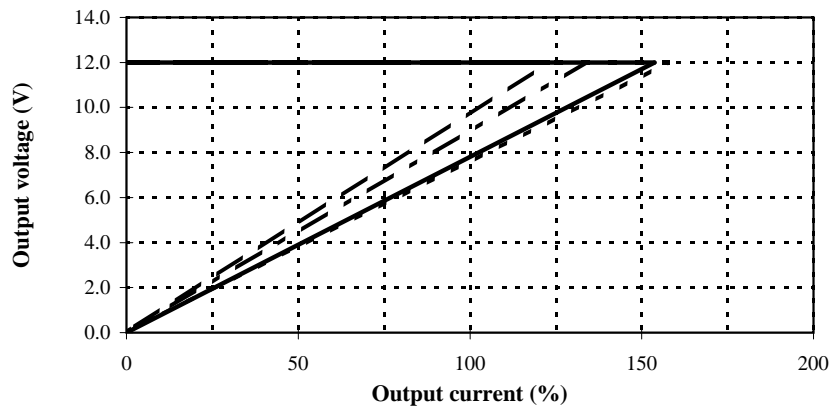


24V

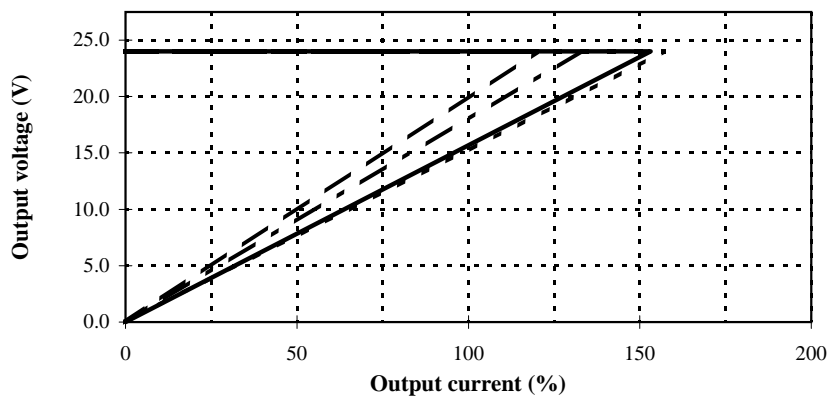


2-3 Over current protection (OCP) characteristics

Conditions: Vin : 115VAC  
 Ta : -25°C - - - - -  
 25°C - ·····  
 50°C - ———


5V

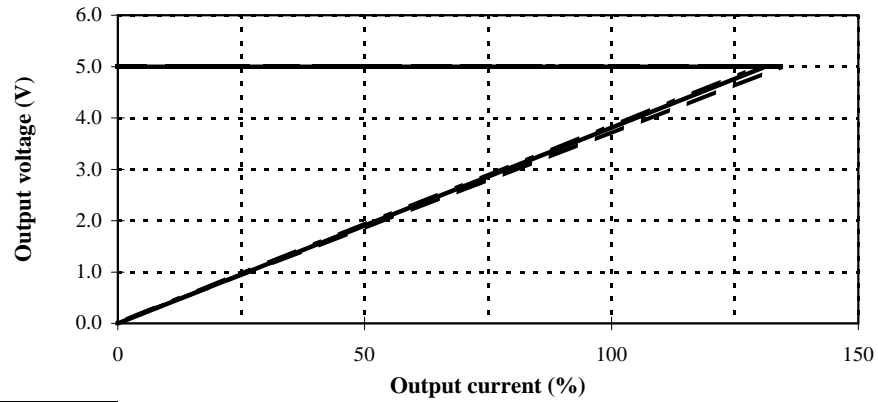

12V

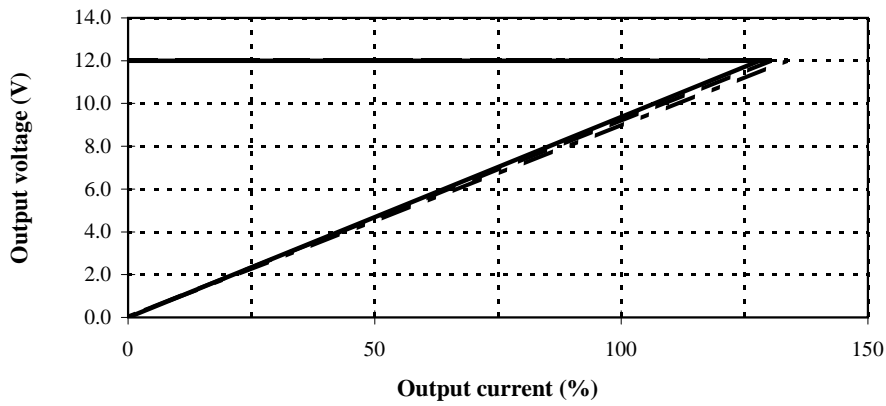


24V

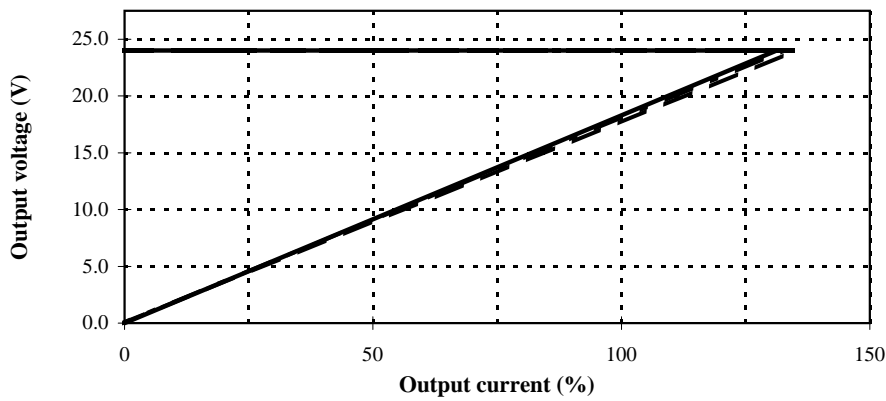


2-3 Over current protection (OCP) characteristics

Conditions: Vin : 230VAC  
 Ta : -25°C -----  
 25°C .....  
 50°C ———


5V

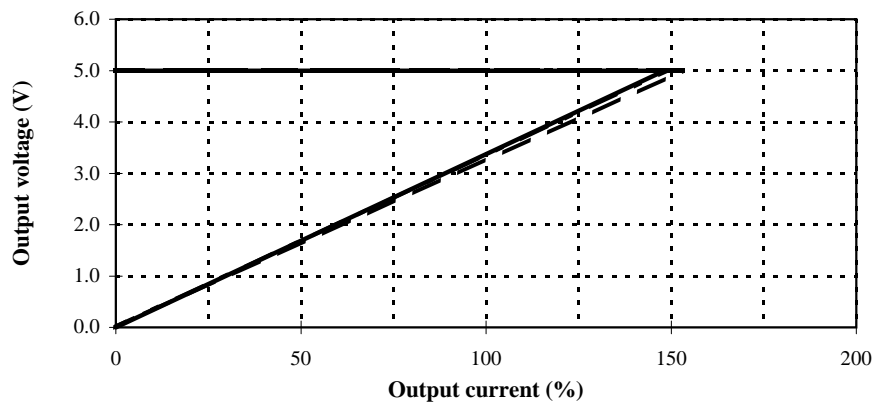

12V

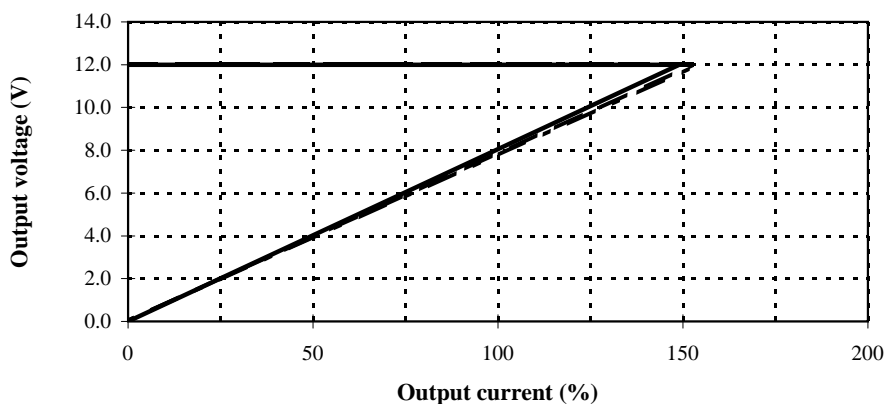


24V

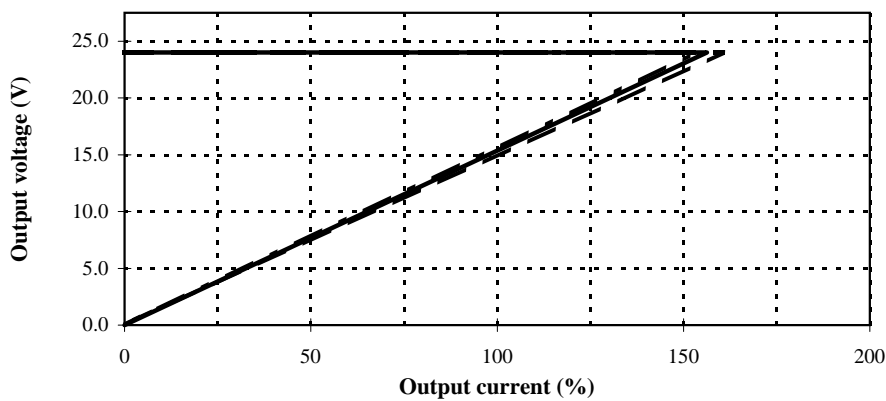


2-4 Over voltage protection (OVP) characteristics

Conditions : Ta = 25°C  
Vin = 230VAC  
Iout = 0%


5V

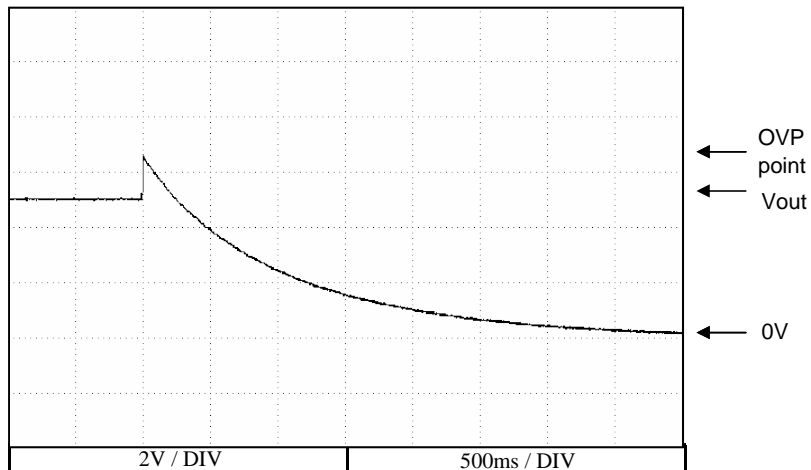

12V

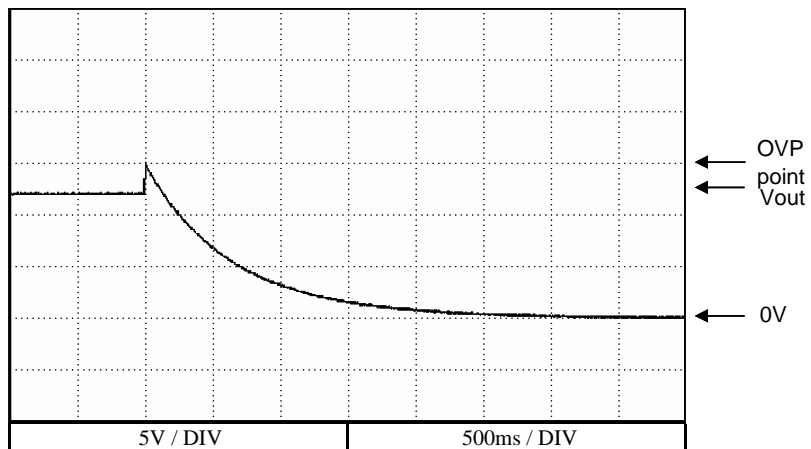

24V

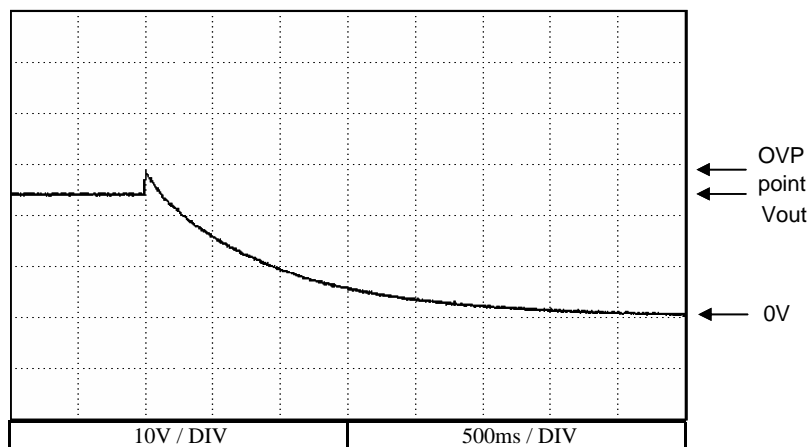





2-5 Output Rise Characteristics

Conditions: Vin : 88VAC (A)  
 : 115VAC (B)  
 : 230VAC (C)  
 : 264VAC (D)  
 Iout : 0%  
 Ta : 25°C


5V

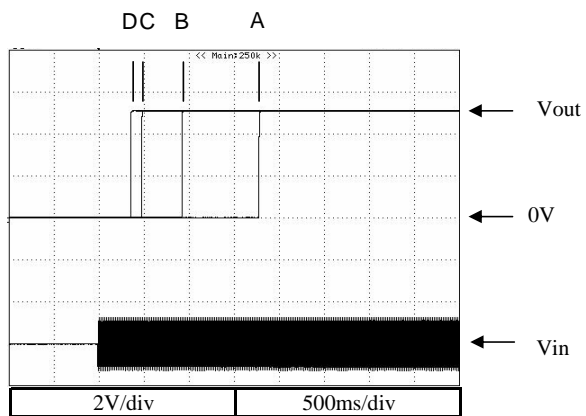

12V

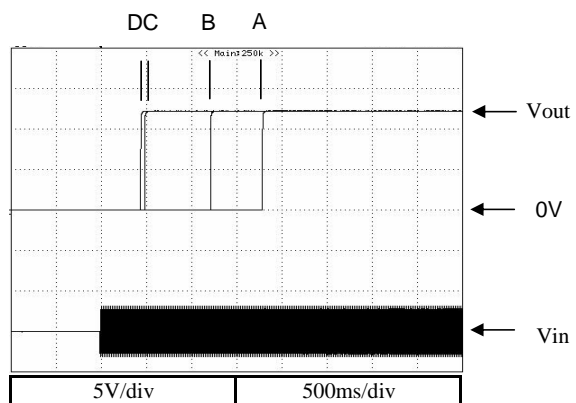


24V

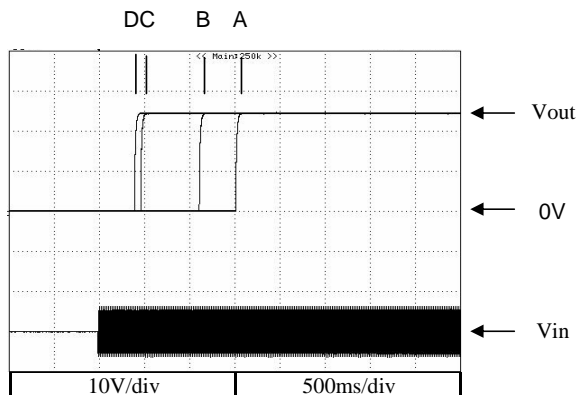


2-5 Output Rise Characteristics

Conditions: Vin : 88VAC (A)  
 : 115VAC (B)  
 : 230VAC (C)  
 : 264VAC (D)  
 Iout : 100%  
 Ta : 25°C


5V

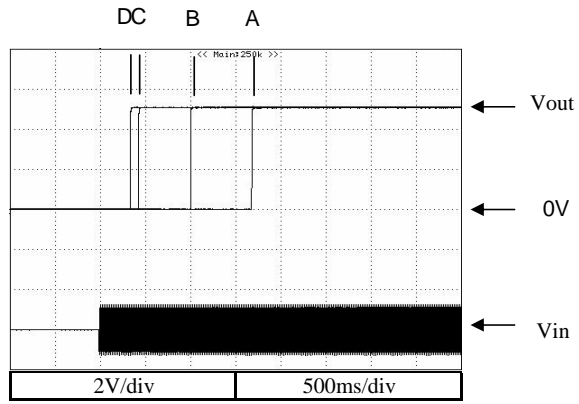

12V

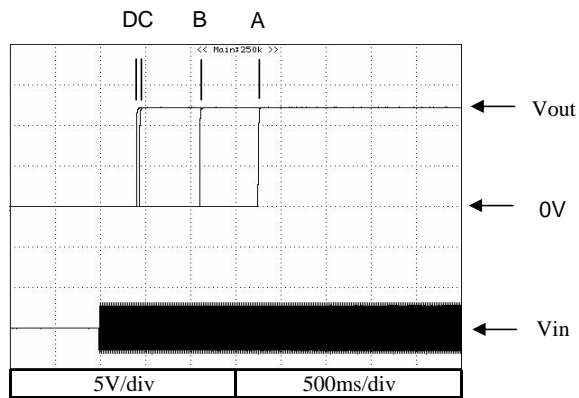


24V

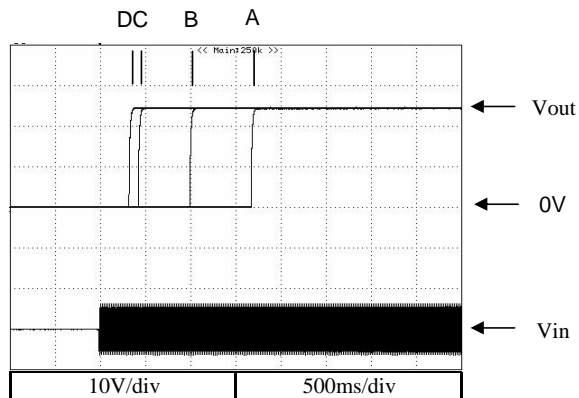


2-6 Output Fall Characteristics

Conditions: Vin : 88VAC (A)  
                  : 115VAC (B)  
                  : 230VAC (C)  
                  : 264VAC (D)  
Iout : 0%  
Ta : 25°C


5V

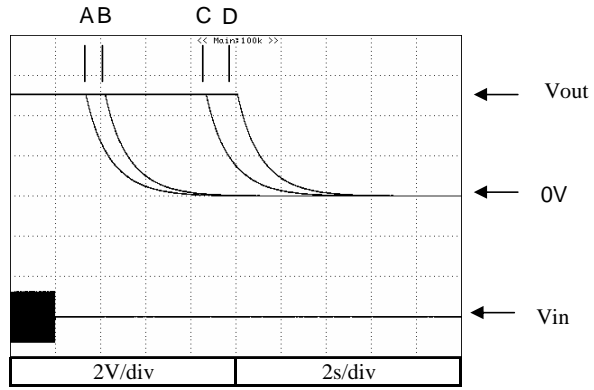

12V

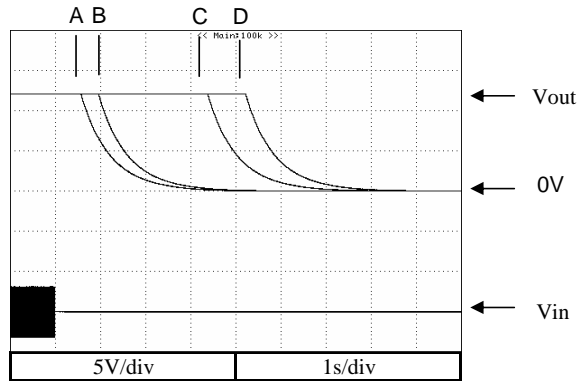


24V

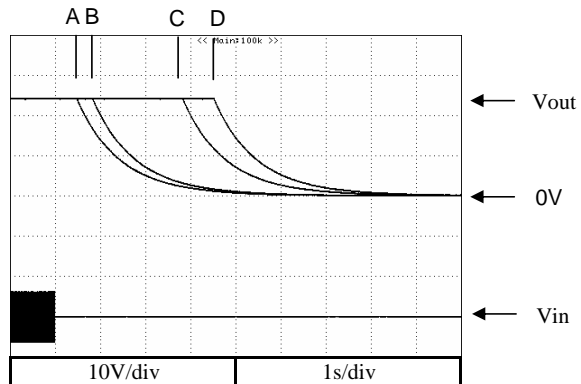


2-6 Output Fall Characteristics

Conditions: Vin : 88VAC (A)  
 : 115VAC (B)  
 : 230VAC (C)  
 : 264VAC (D)  
 Iout : 100%  
 Ta : 25°C


5V

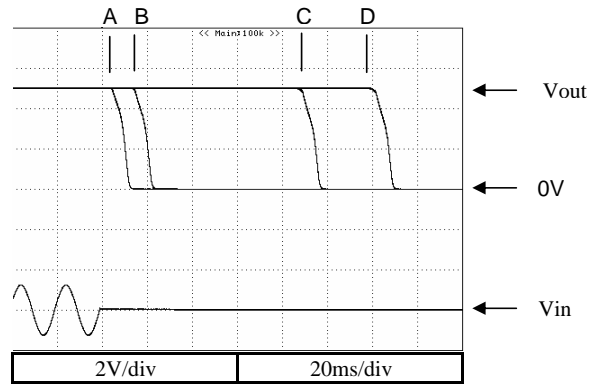

12V

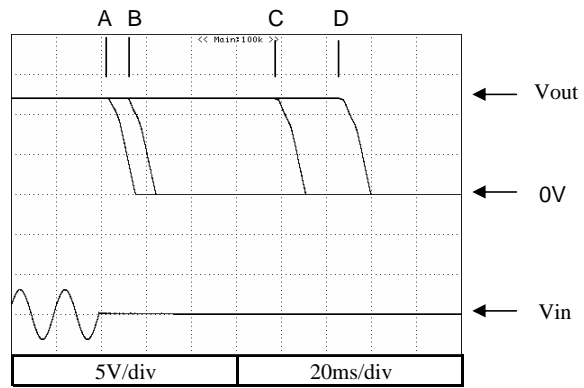


24V

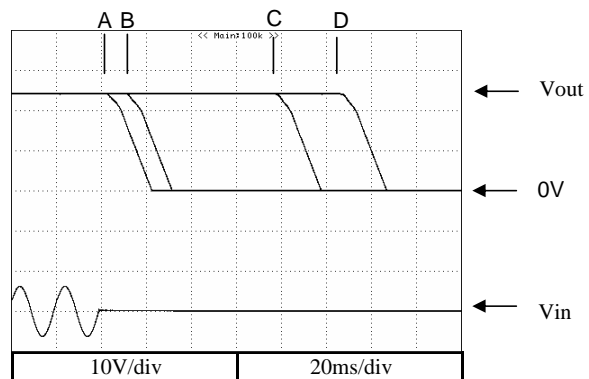


2-7 Hold Up Time Characteristics

Conditions Vin: 115VAC -----  
 230VAC ————  
 Ta: 25°C


5V

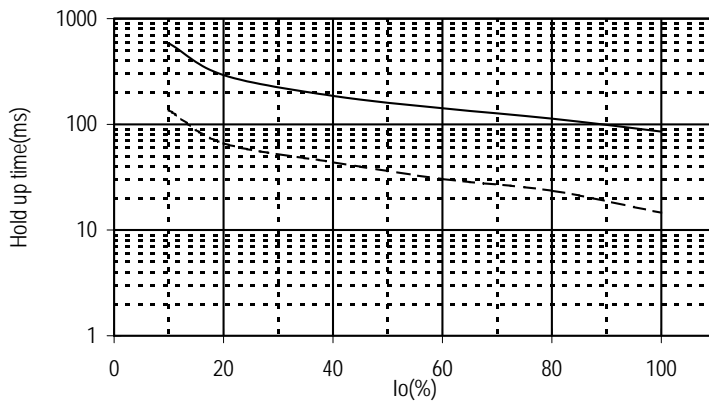

12V

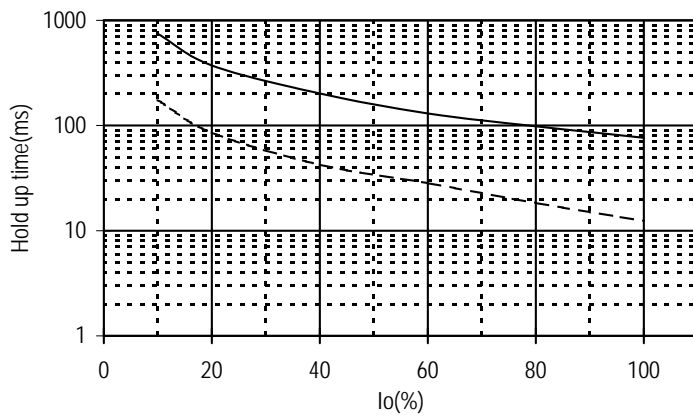


24V

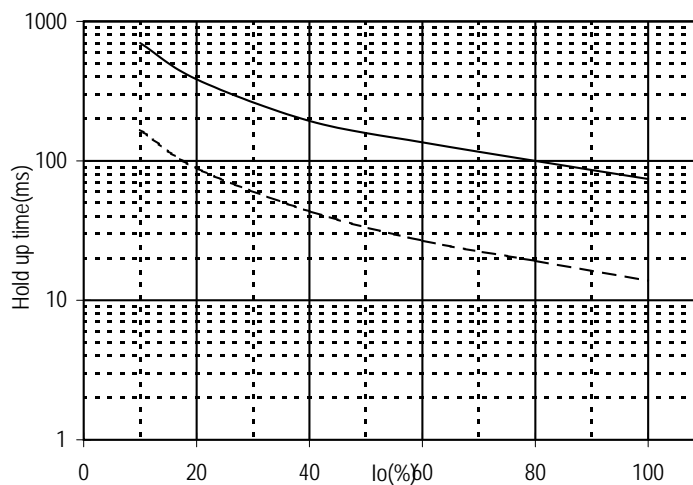


2-8 Dynamic Line Response Characteristics

Conditions :  $V_{in} = 88 \leq 132$  VAC (A)  
 $= 170 \leq 264$  VAC (B)  
 $I_{out} = 100\%$   
 $T_a = 25^{\circ}\text{C}$


5V

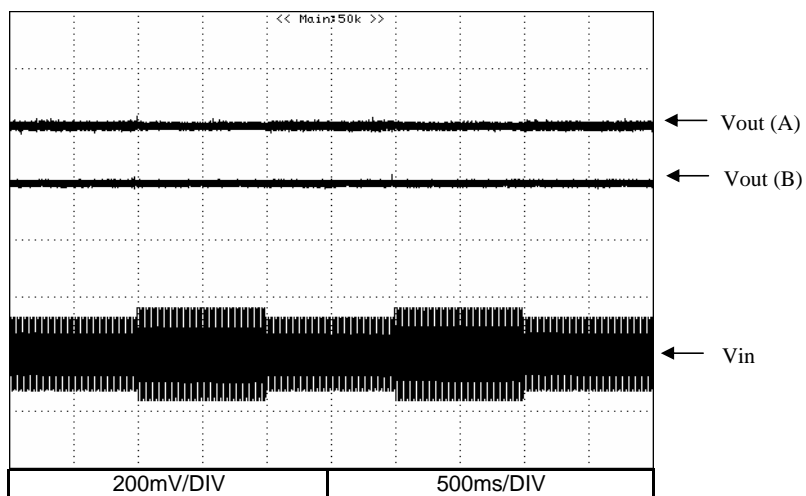

12V

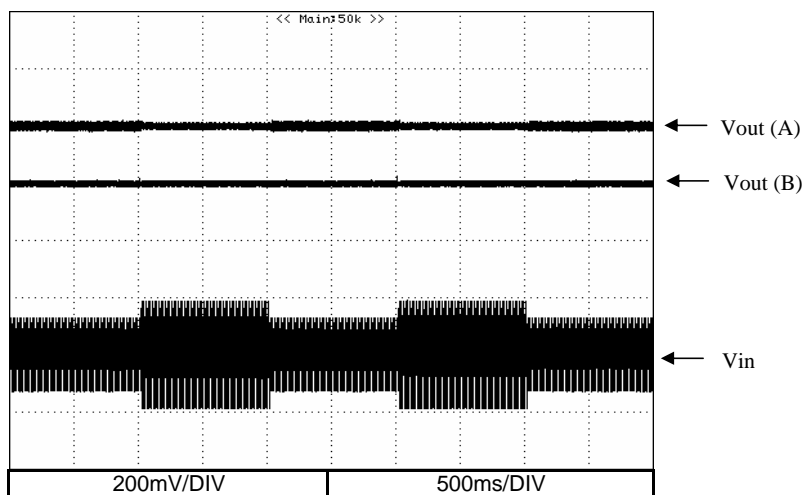

24V

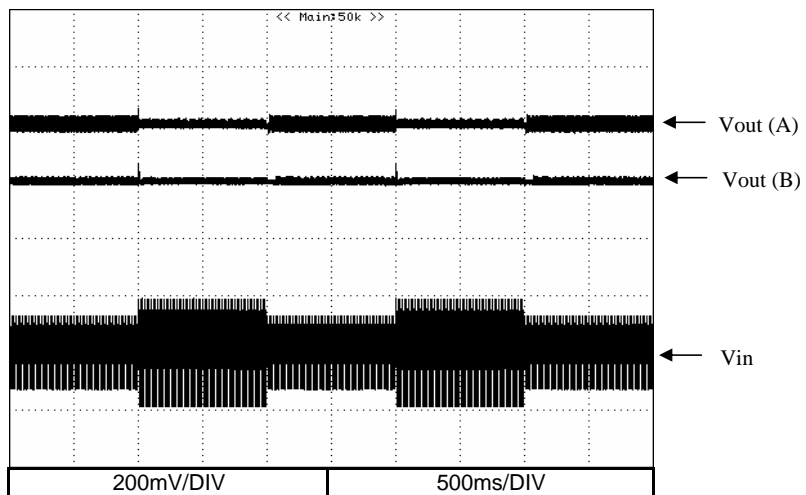


2-9 Dynamic Load Response Characteristics


Conditions :  $V_{in} = 115VAC$   
 $T_a = 25^{\circ}C$

5V

$f=100Hz$

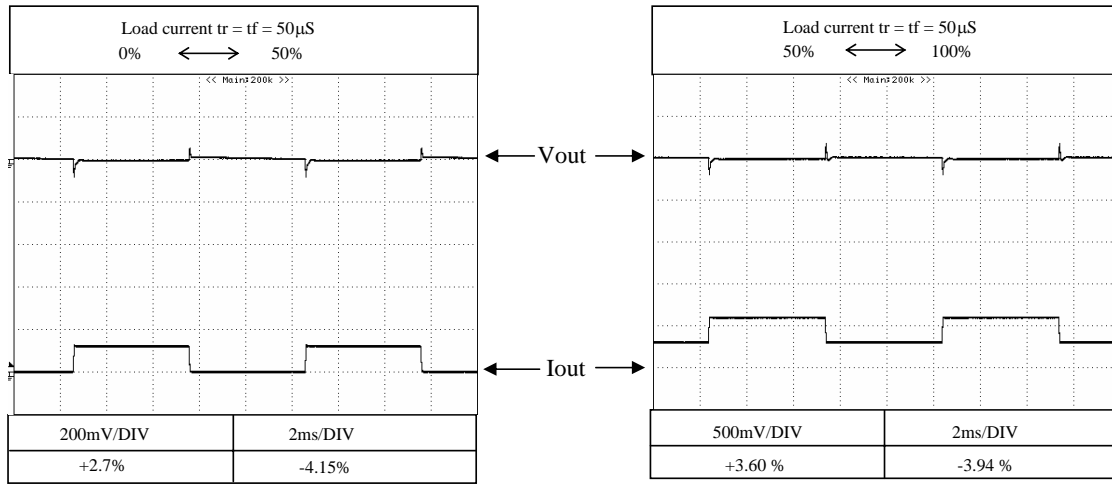

$f=1KHz$

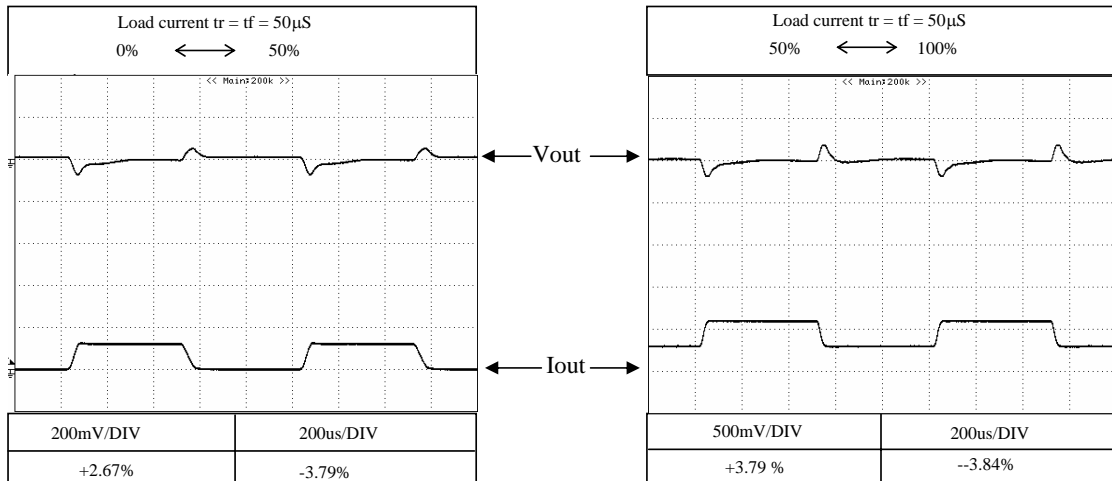


2-9 Dynamic Load Response Characteristics


Conditions :  $V_{in} = 230VAC$   
 $T_a = 25^{\circ}C$

5V

$f=100Hz$

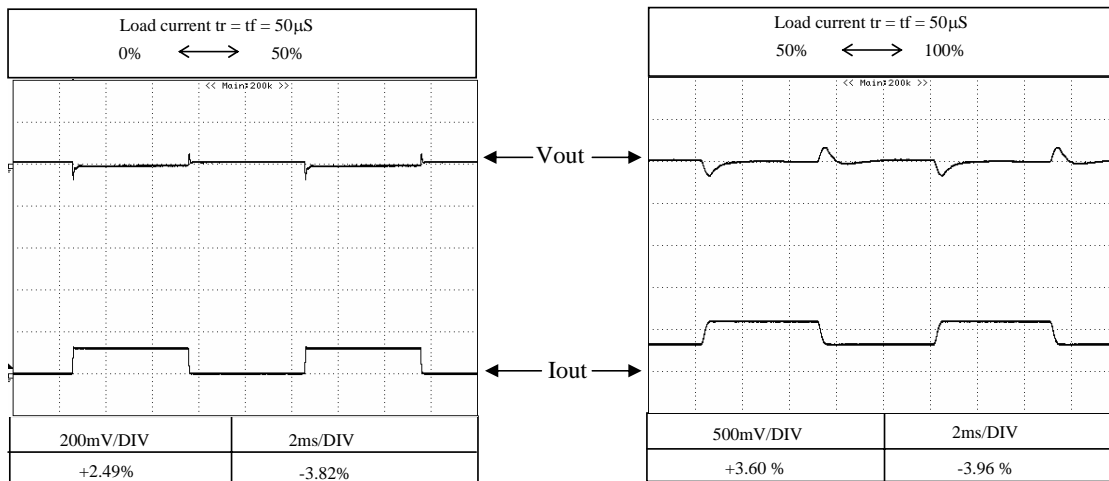

$f=1KHz$

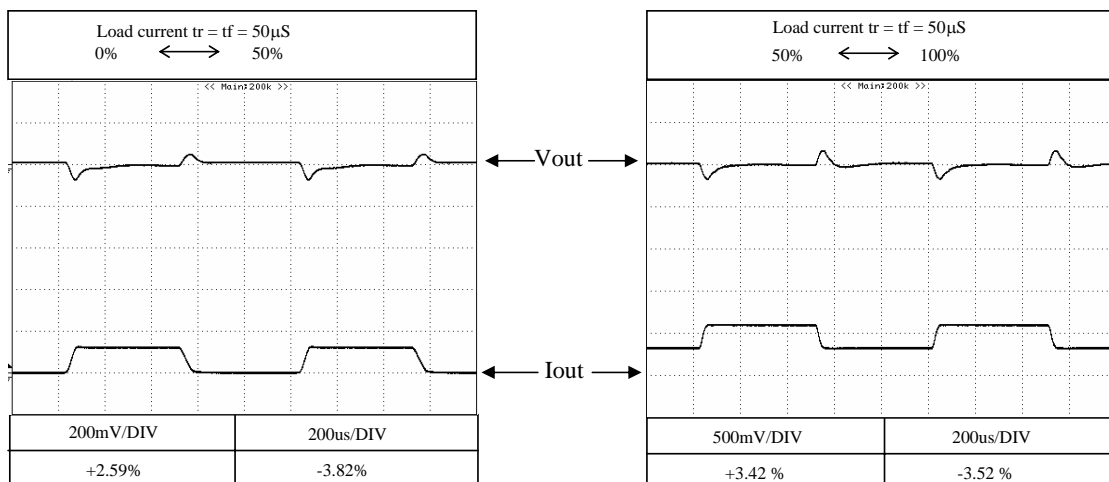




2-9 Dynamic Load Response Characteristics


Conditions :  $V_{in} = 115VAC$   
 $T_a = 25^{\circ}C$

12V

$f=100Hz$

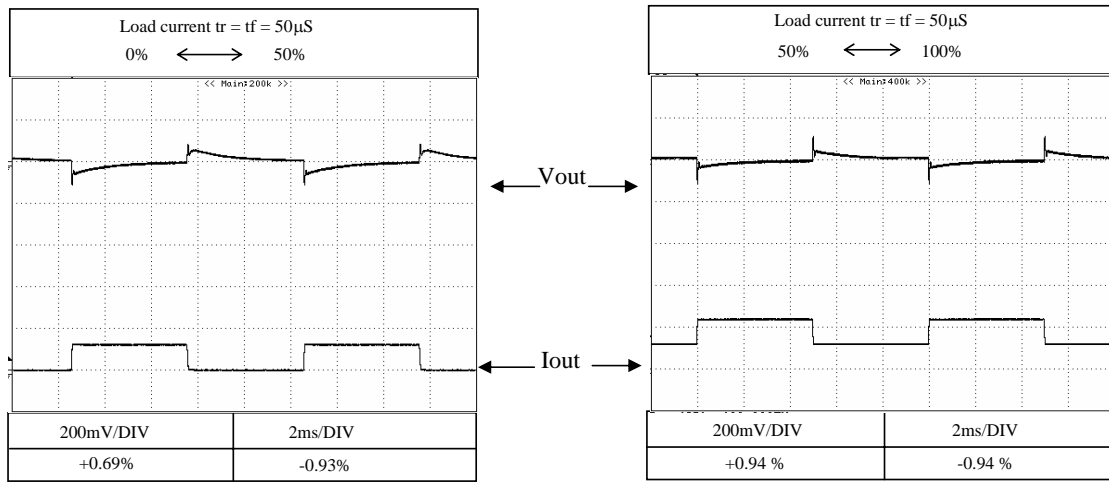

$f=1KHz$

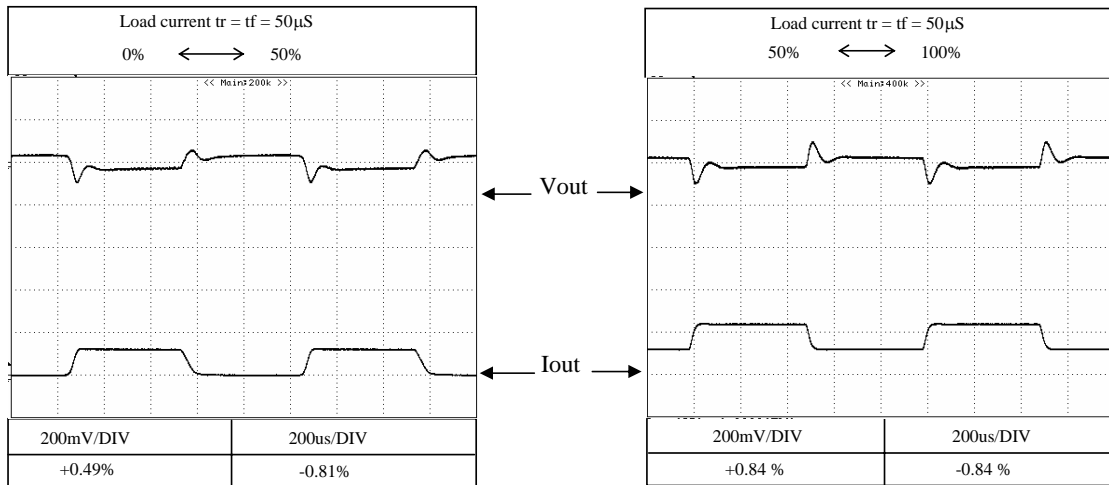


2-9 Dynamic Load Response Characteristics


Conditions  $V_{in} = 230VAC$   
 $T_a = 25^{\circ}C$

12V

$f=100Hz$

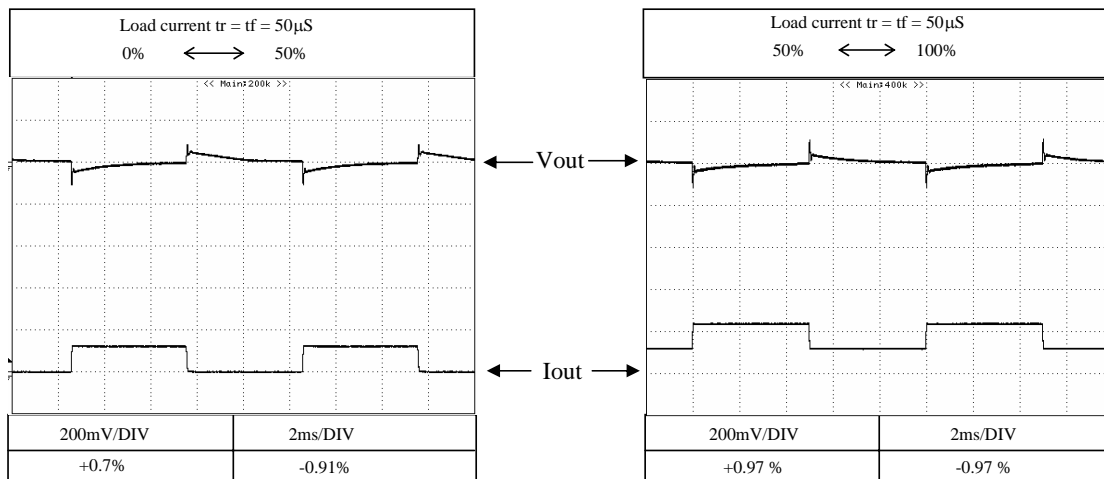

$f=1KHz$

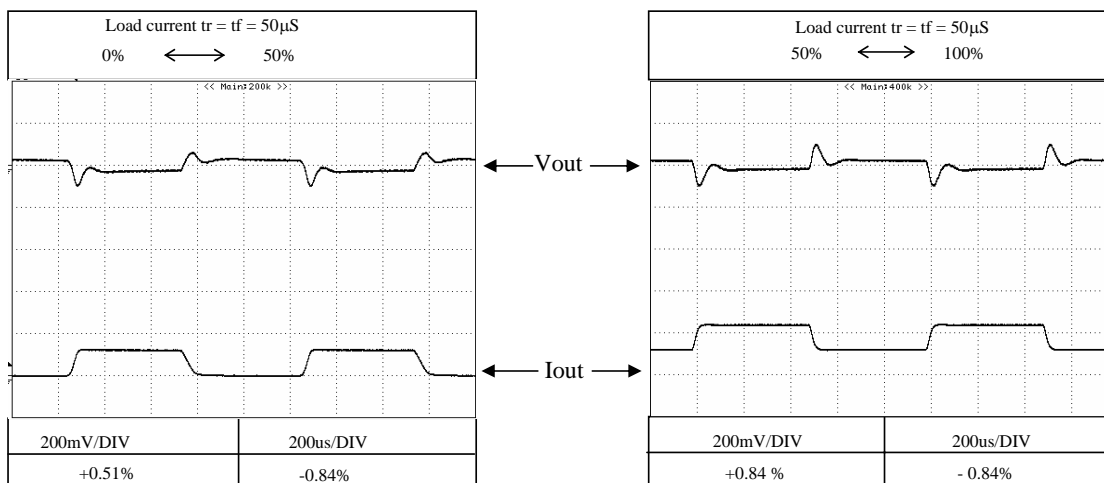


2-9 Dynamic Load Response Characteristics


Conditions : Vin = 115VAC  
Ta = 25°C

24V

f=100Hz

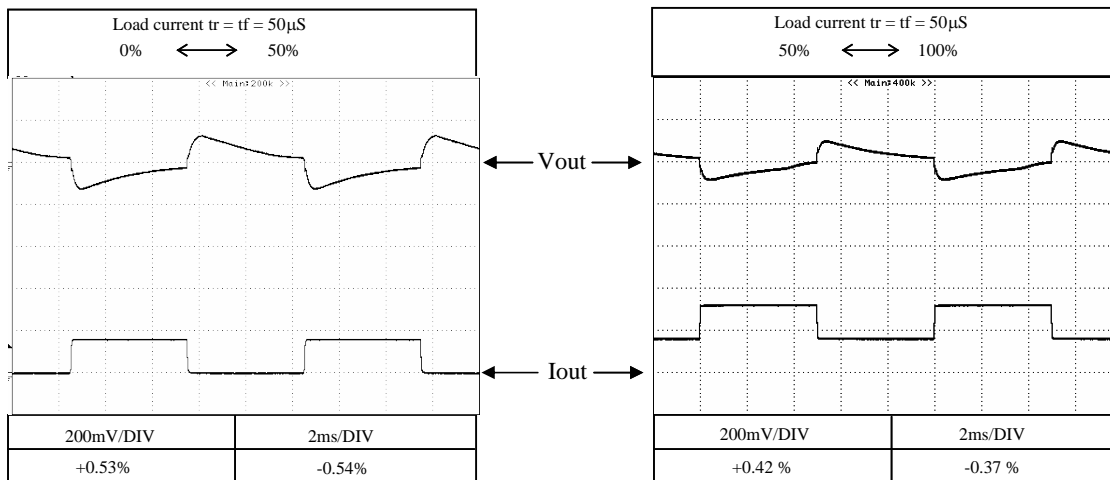

f=1KHz

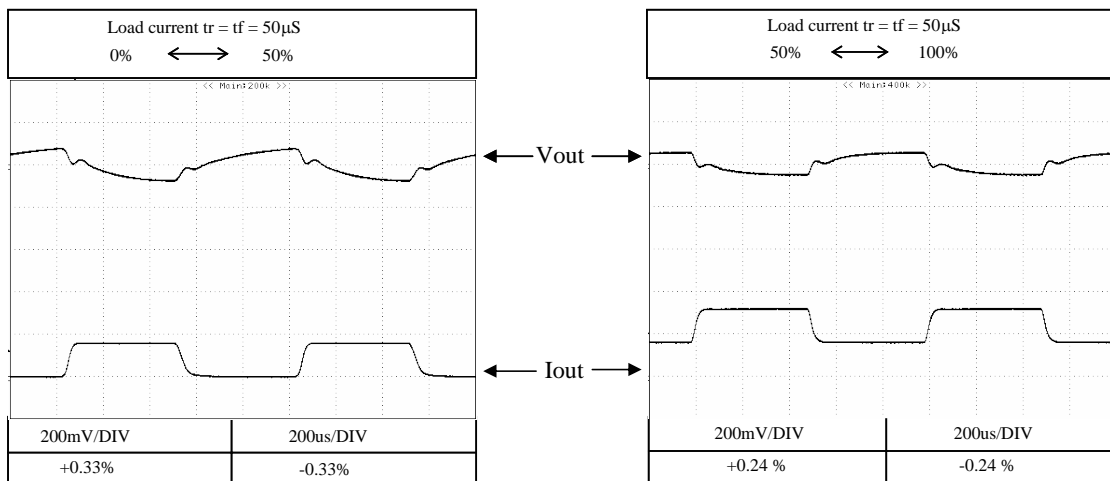


2-9 Dynamic Load Response Characteristics


Conditions  $V_{in} = 230VAC$   
 $T_a = 25^{\circ}C$

24V

$f=100Hz$

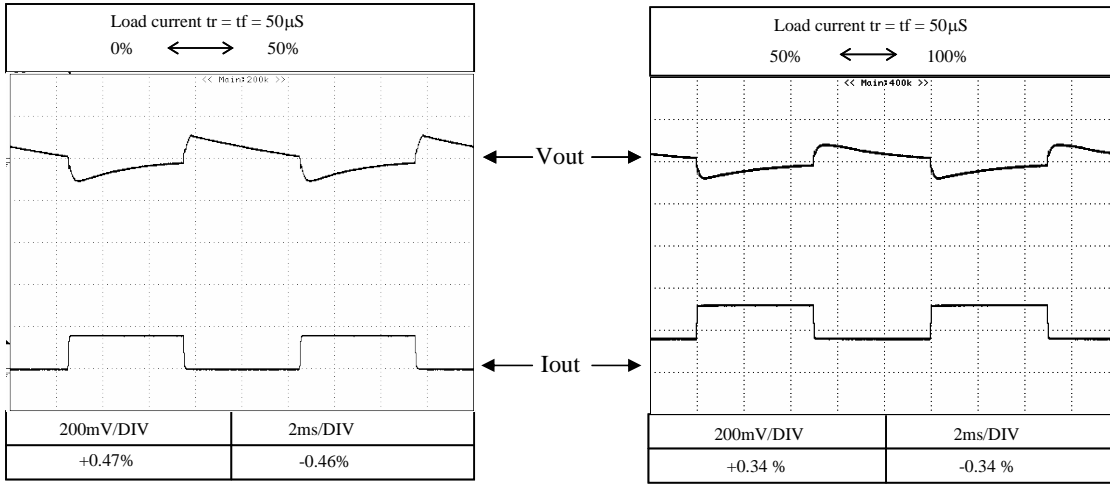

$f=1KHz$

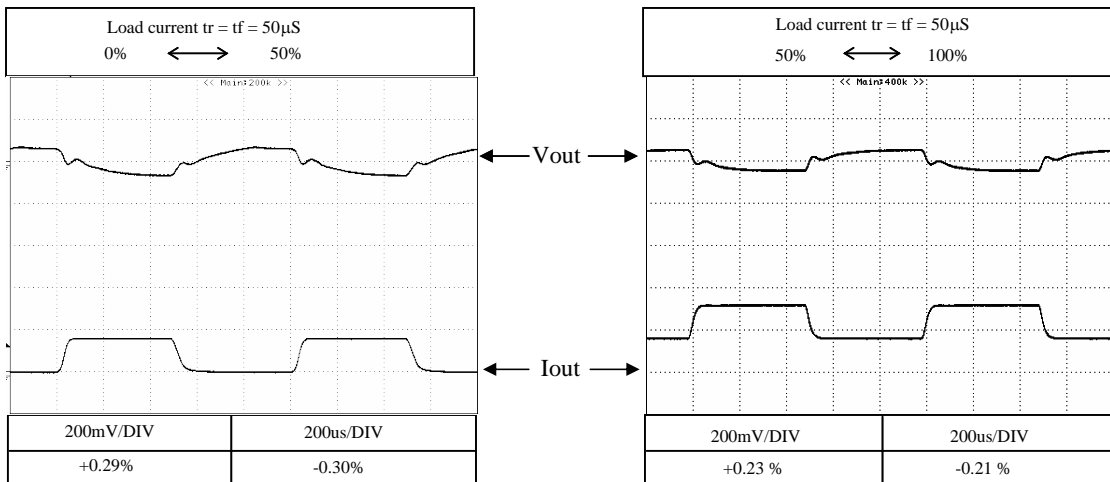


2-10 Response to Brown Out Characteristics

Conditions: Vin : 115VAC  
Iout : 100%  
Ta : 25°C


5V

A = 20ms  
B = 60ms

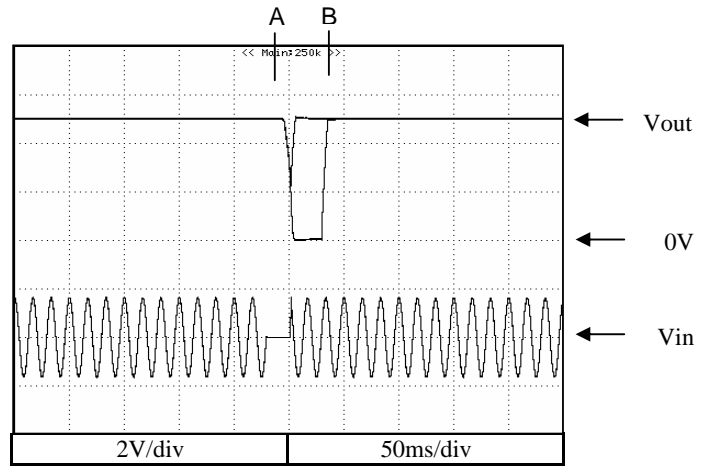


12V

A = 25.8ms  
B = 58.0ms

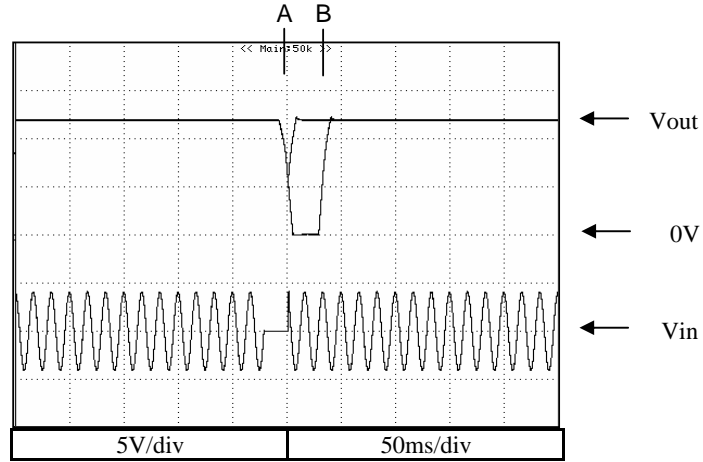

24V

A = 22ms  
B = 80ms

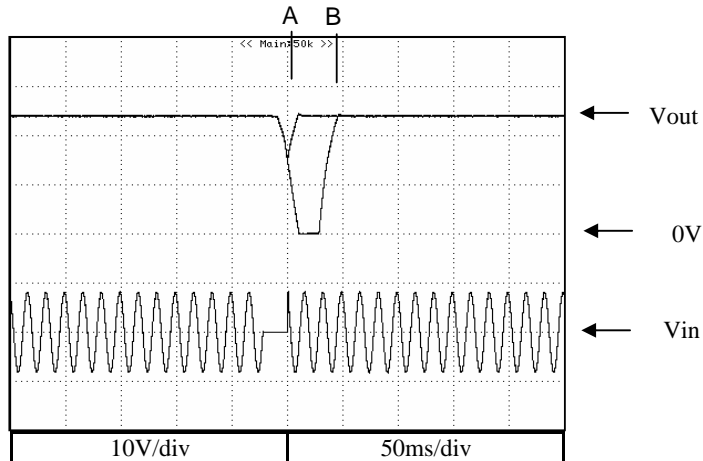


2-10 Response to Brown Out Characteristics

Conditions: Vin : 230VAC  
Iout : 100%  
Ta : 25°C


5V

A = 78ms  
B = 120ms

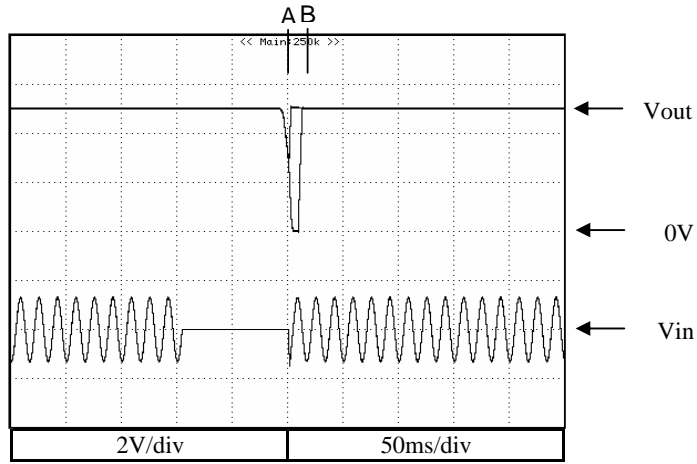


12V

A = 88ms  
B = 120ms

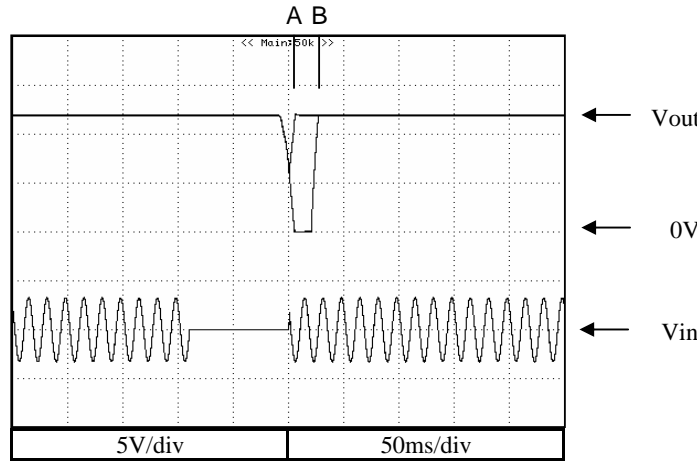

24V



A = 80ms  
B = 110ms

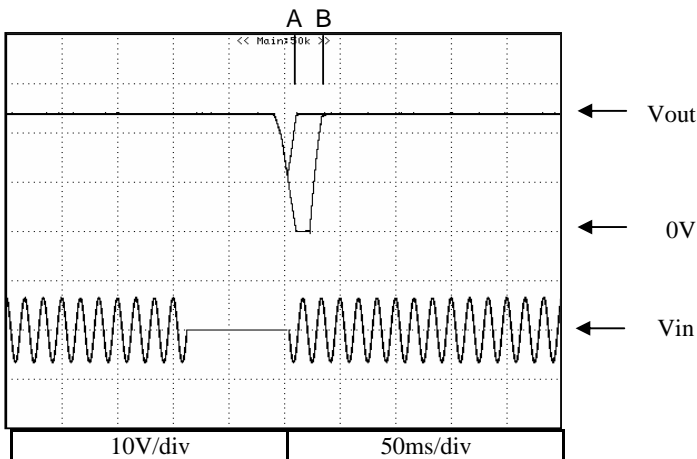

2-11 Inrush Current

Conditions :  $V_{in} = 115VAC$   
 $I_{out} = 100\%$   
 $T_a = 25^{\circ}C$



5V

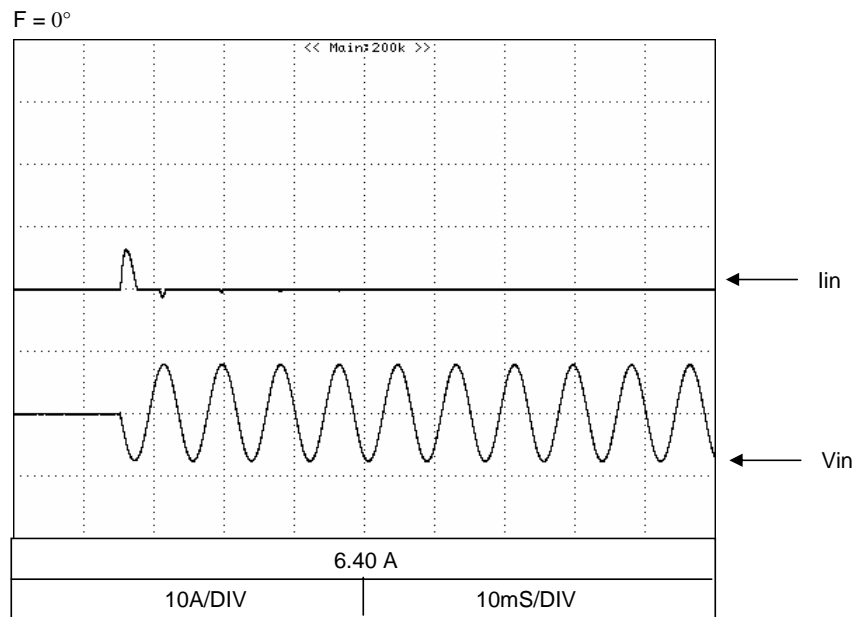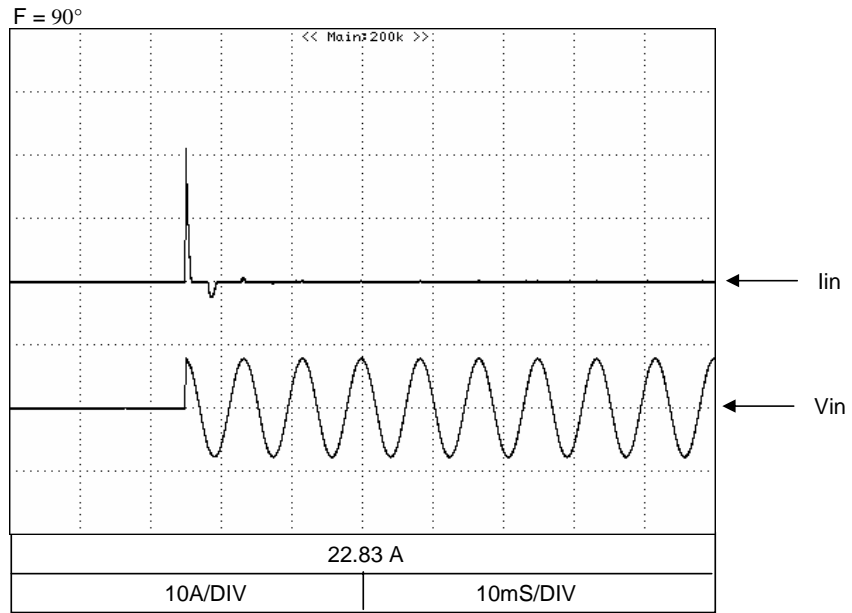

2-11 Inrush Current

Conditions :  $V_{in} = 230VAC$   
 $I_{out} = 100\%$   
 $T_a = 25^{\circ}C$

5V

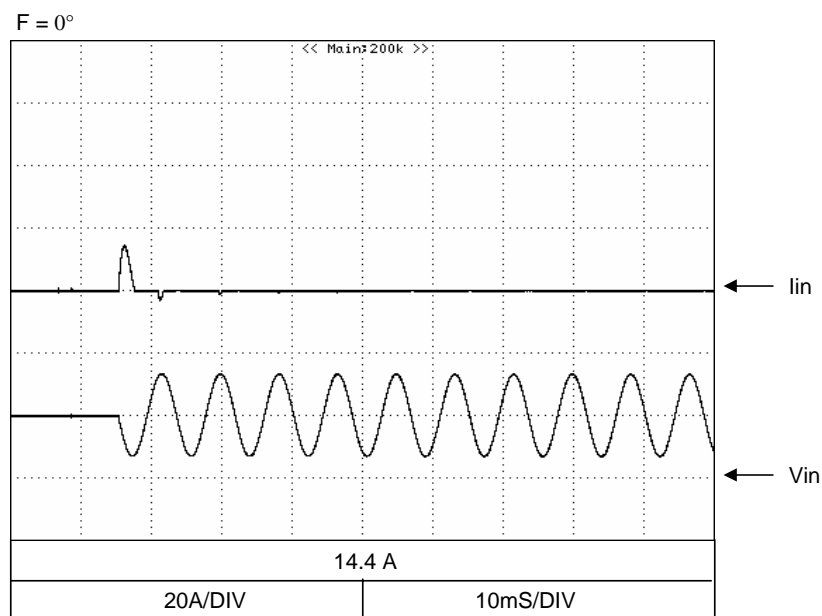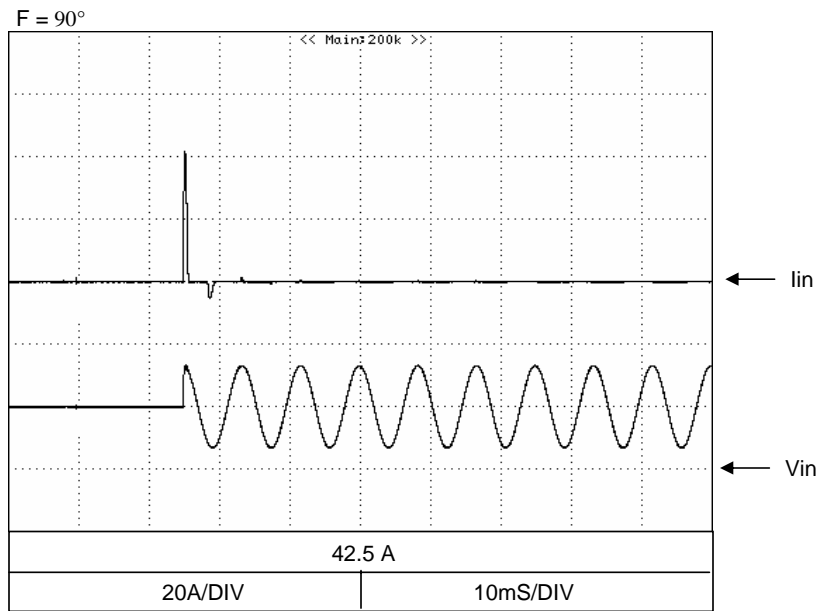




2-12 Input Current Harmonics

Conditions : Vin = 230VAC  
 Iout = 100%  
 Ta = 25°C  
 f = 60Hz


5V

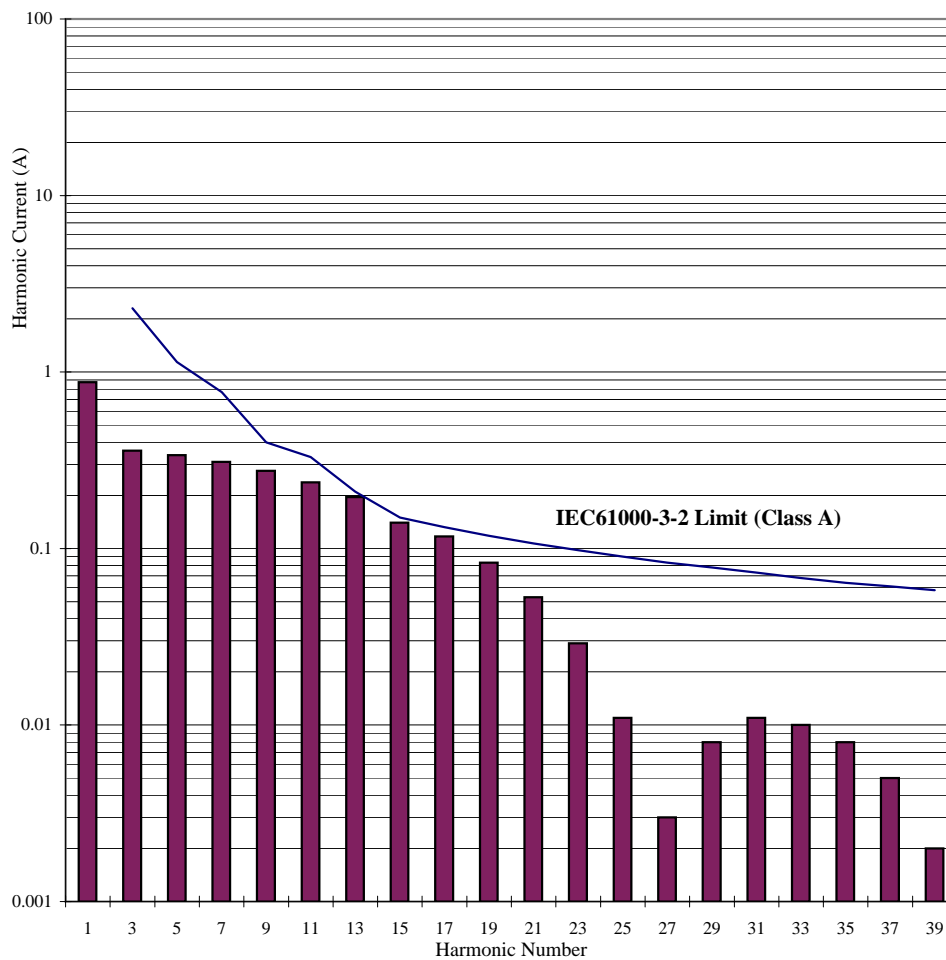


2-13 Leakage Current Characteristics

Conditions : Iout = 0%  
 = 100%  
 Ta = 25°C  
 f = 50Hz


5V

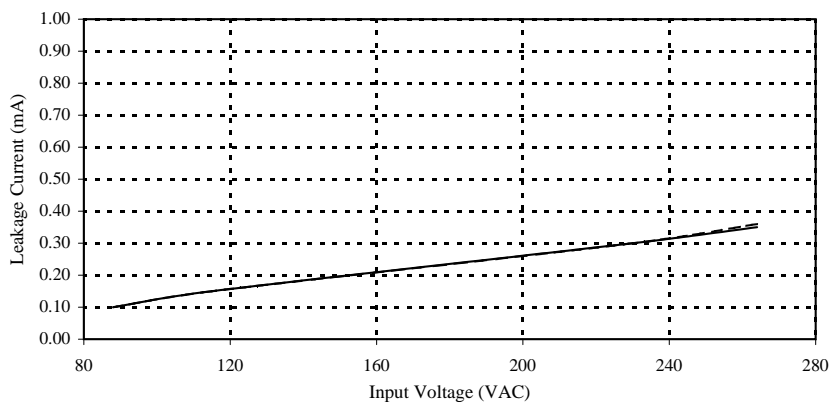

12V

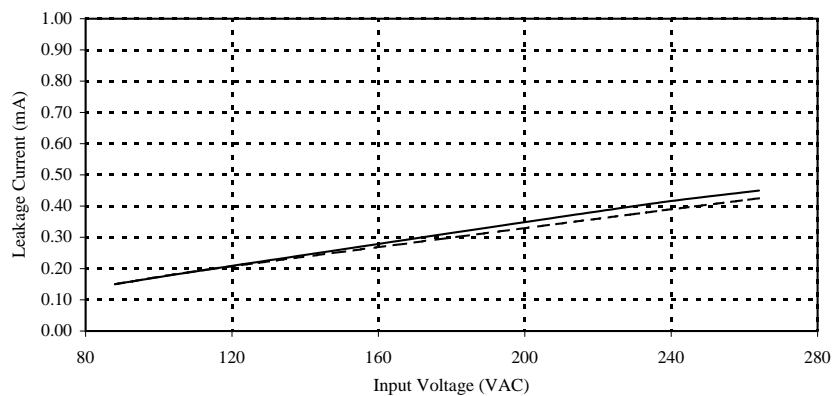

24V

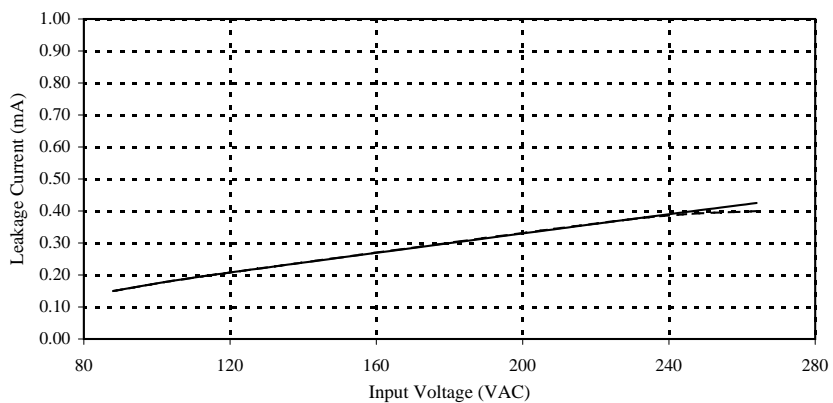


2-14 Output Ripple And Noise Waveform

Conditions

Vin = 230VAC  
Iout = 100%  
Ta = 25°C


NORMAL MODE

5V

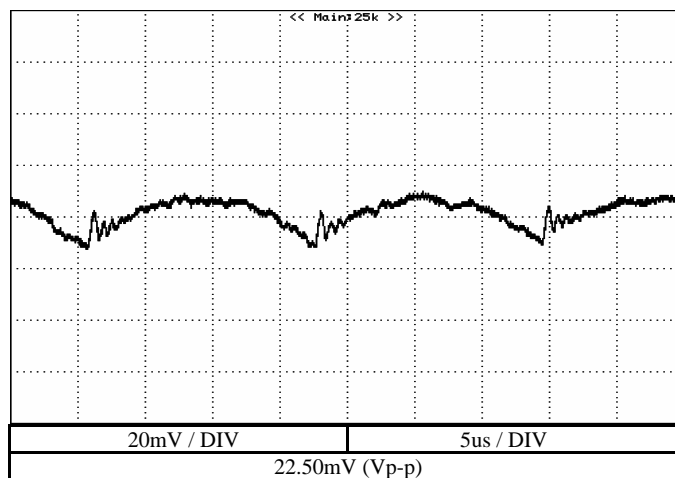


← Vout

12V

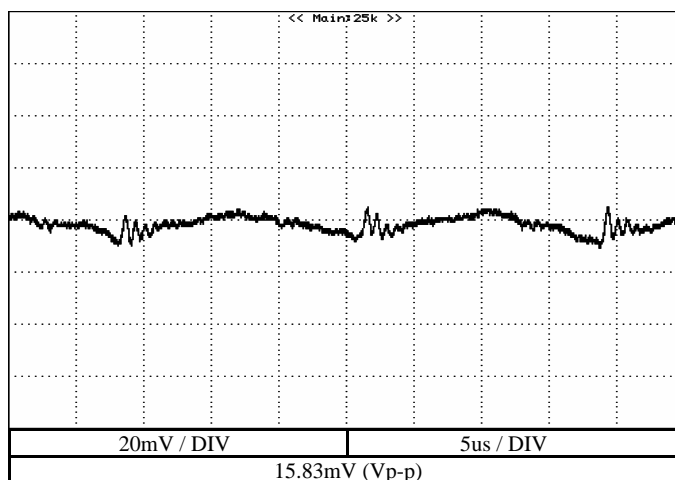

← Vout

24V

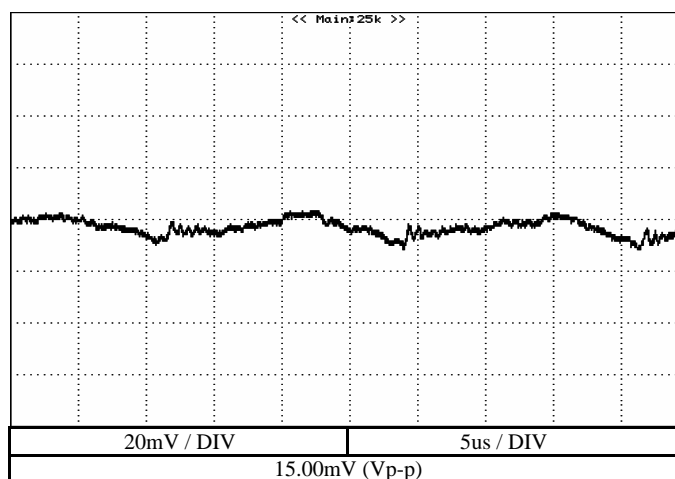

← Vout


2-14 Output Ripple And Noise Waveform

Conditions

Vin = 230VAC  
Iout = 100%  
Ta = 25°C


NORMAL + COMMON MODE

5V

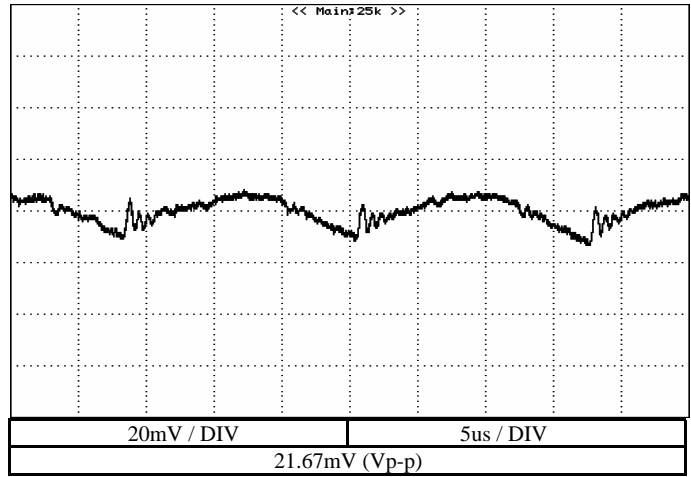


← Vout

12V

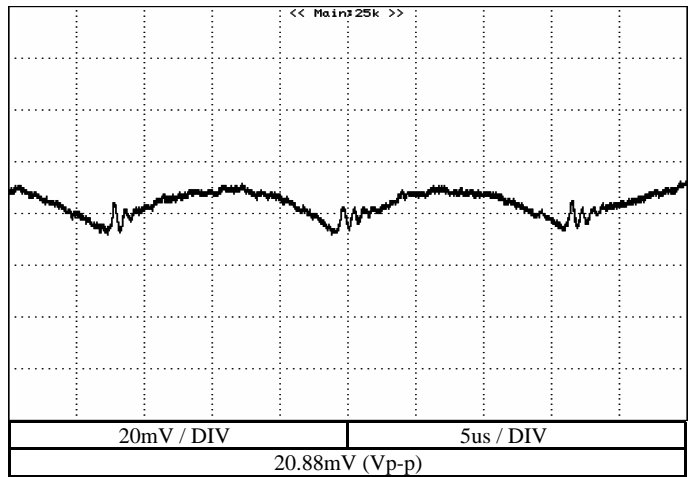

← Vout

24V

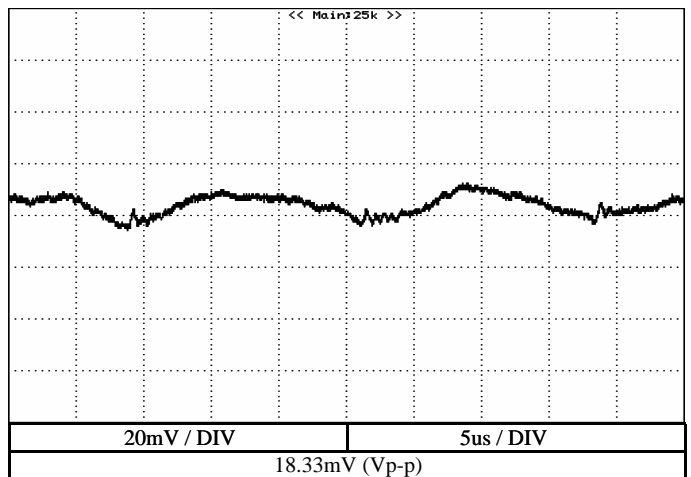

← Vout


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC  
Iout : 100%

Conducted Emission


5V

Ref.	Point A (8.25MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	60.0	47.0
AV	50.0	33.4

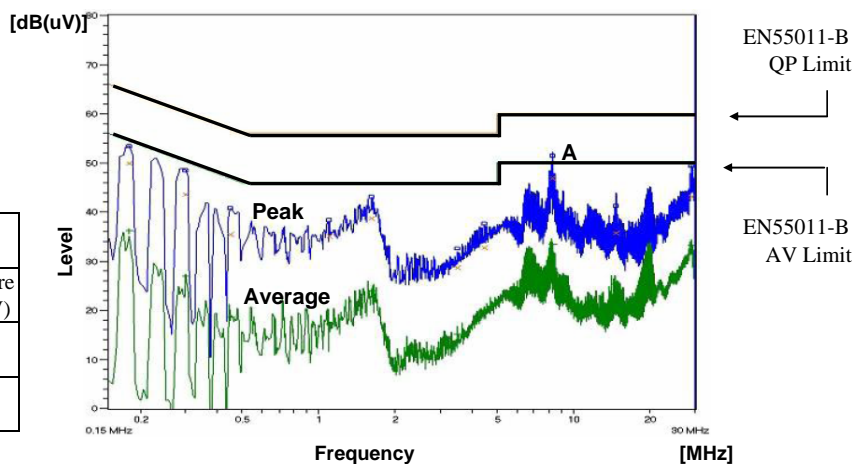

Phase : N

Ref.	Point B (8.25MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	60.0	47.0
AV	50.0	33.4

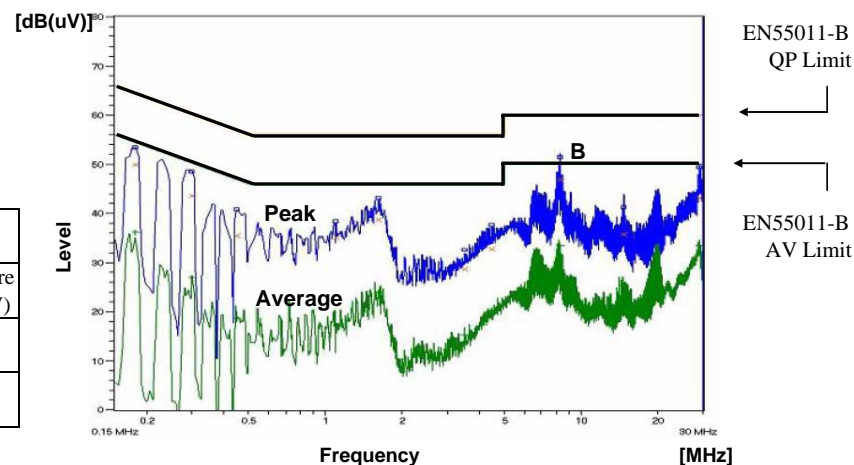

Phase : L


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 230VAC  
Iout : 100%

Conducted Emission


5V

Ref.	Point A (0.175MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	64.7	58.0
AV	54.7	41.1

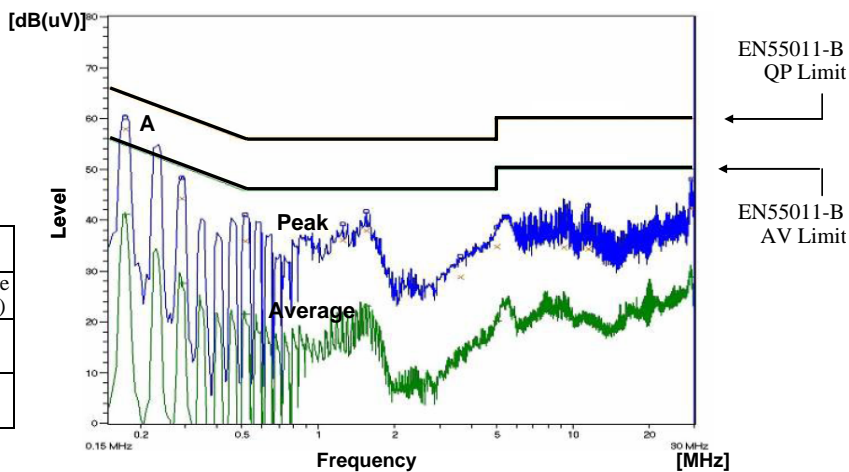

Phase : N

Ref.	Point B (0.175MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	64.7	59.3
AV	54.7	40.5

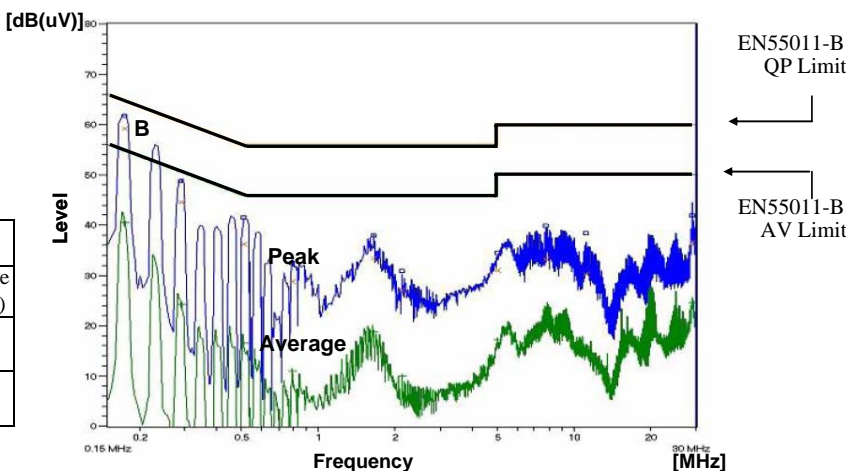

Phase : L


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC  
Iout : 100%

Conducted Emission


12V

Ref.	Point A (0.235 MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	62.3	48.4
AV	52.3	24.4

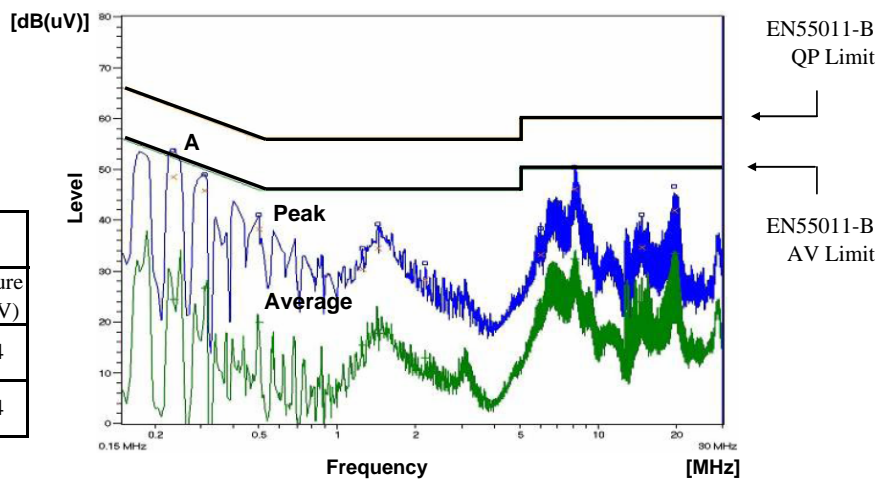

Phase : N

Ref.	Point B (0.24 MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	62.3	49.4
AV	52.3	28.2

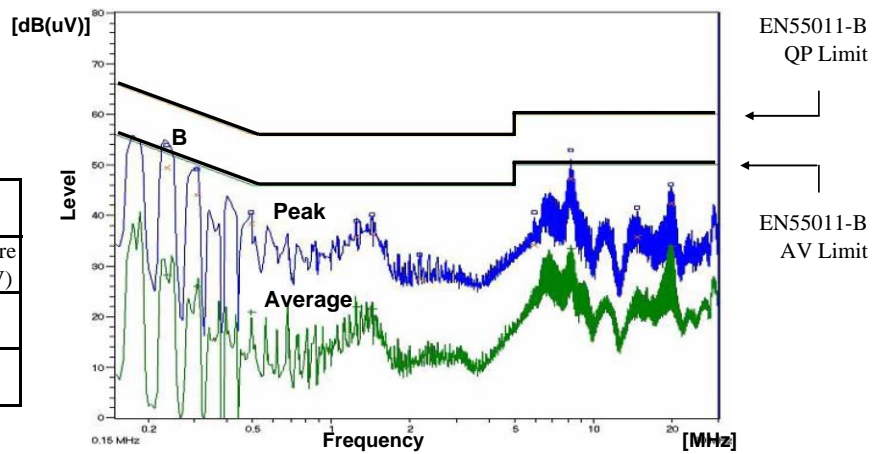

Phase : L


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 230VAC  
Iout : 100%

Conducted Emission


12V

Ref.		Point A (0.180 MHz)	
Data	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)	
QP	64.5	59.3	
AV	54.5	40.0	

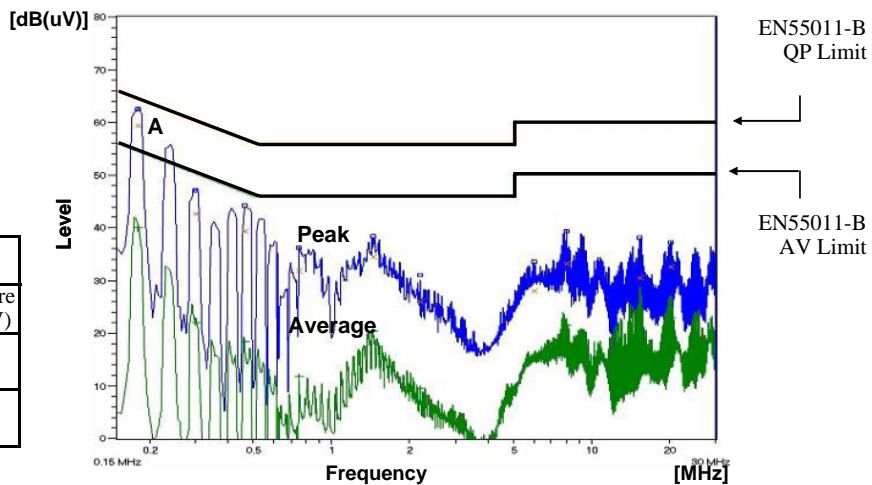

Phase : N

Ref.		Point B (0.185MHz)	
Data	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)	
QP	64.5	60.1	
AV	54.5	41.8	

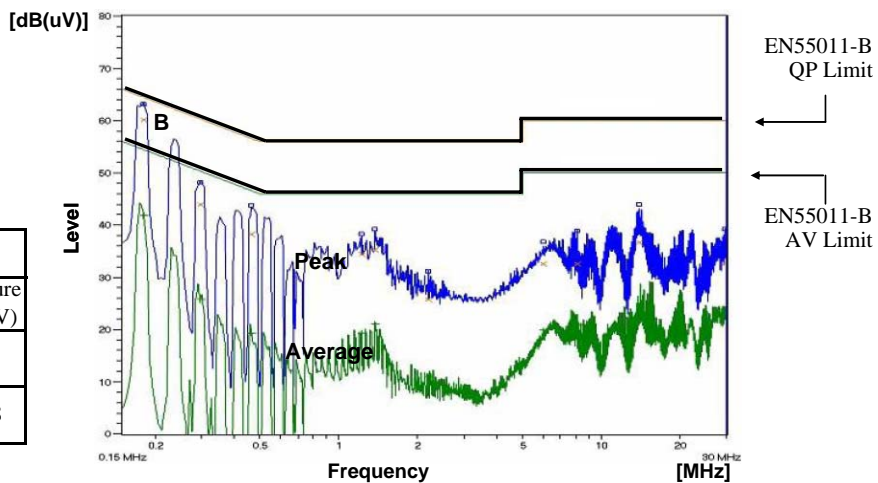

Phase : L




2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC  
Iout : 100%

Conducted Emission


24V

Point A (0.230 MHz)		
Ref.	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	62.4	48.5
AV	52.4	25.2

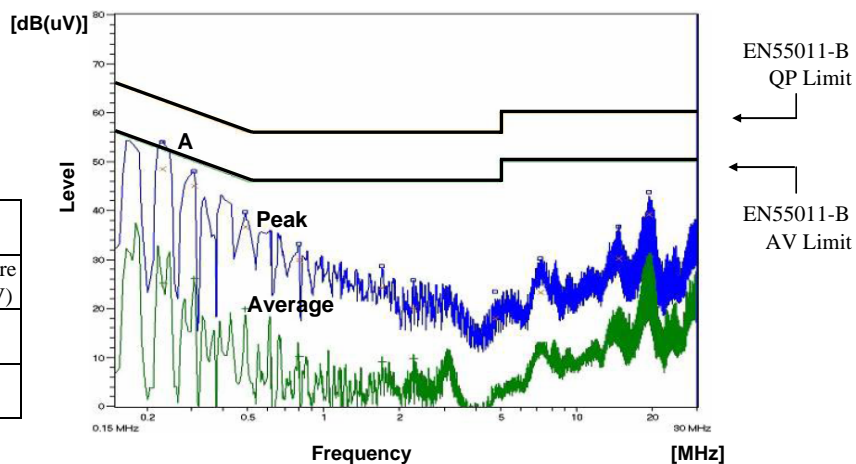

Phase : N

Point B (0.225 MHz)		
Ref.	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	62.6	50.4
AV	52.6	30.5

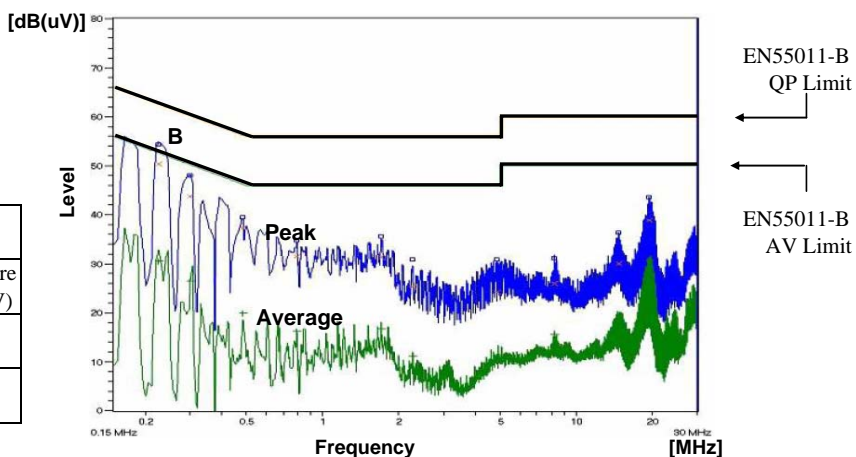

Phase : L


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 230VAC  
Iout : 100%

Conducted Emission


24V

Ref.	Point A (0.175MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	64.7	59.1
AV	54.7	40.1

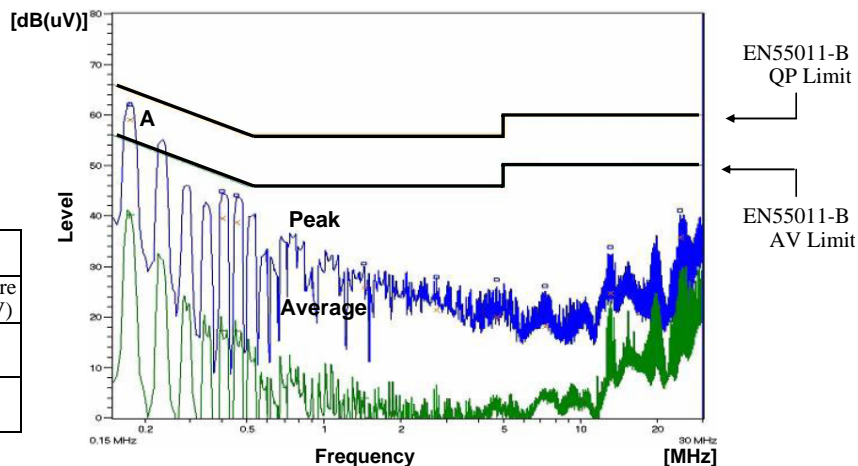

Phase : N

Ref.	Point B (0.175MHz)	
	Limit (dB $\mu$ V)	Measure (dB $\mu$ V)
QP	64.7	60.0
AV	54.7	41.8

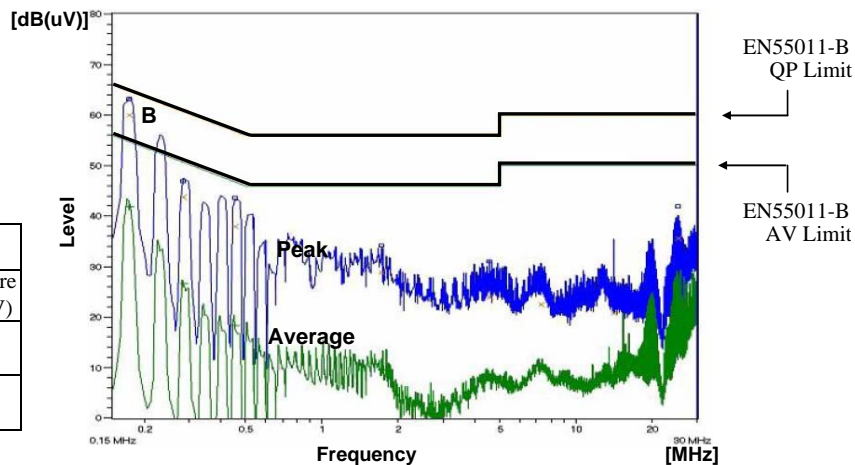

Phase : L


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC  
Iout : 100%


Radiated Emission

5V

HORIZONTAL

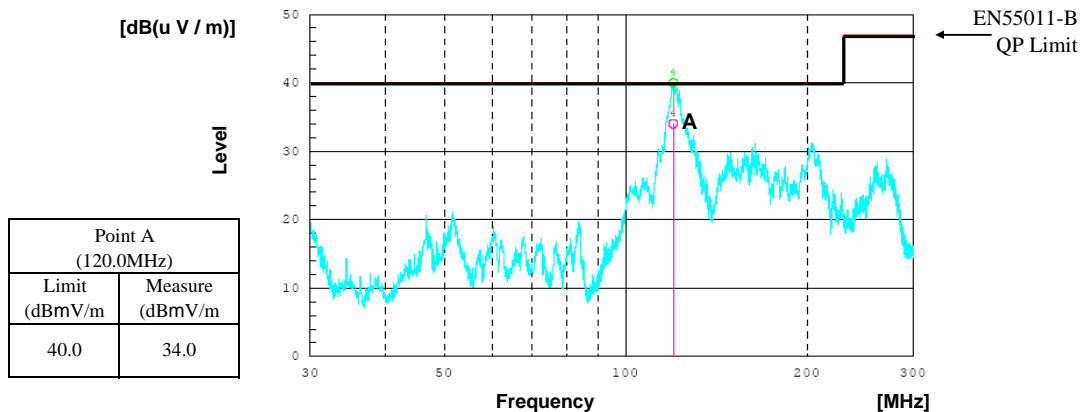

VERTICAL

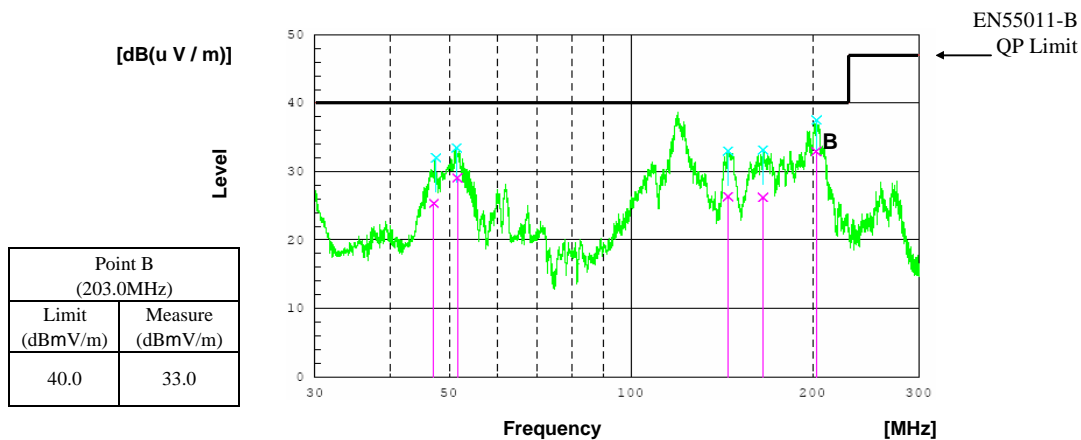


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 230VAC  
Iout : 100%


Radiated Emission

5V

HORIZONTAL

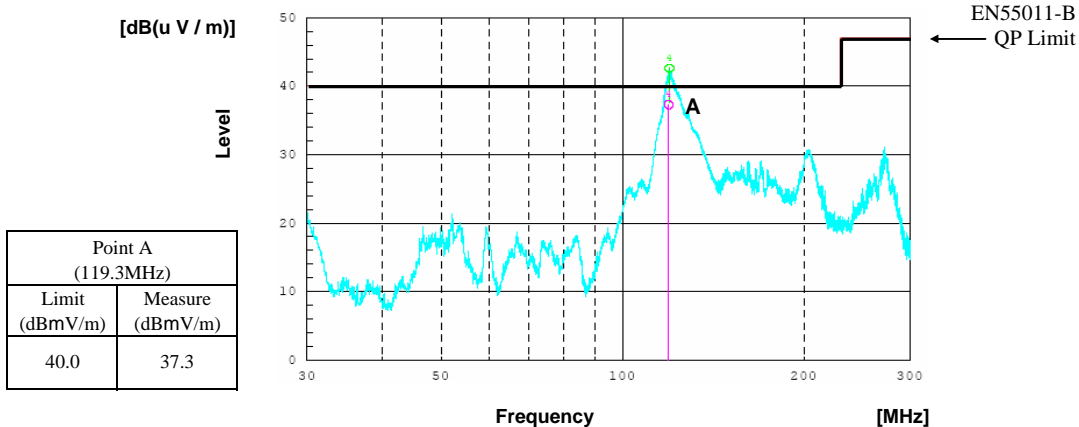

VERTICAL

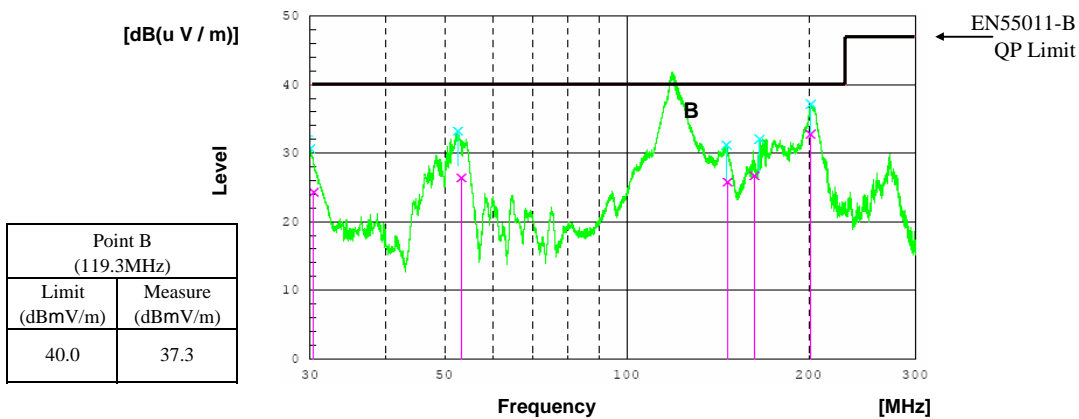


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC  
Iout : 100%


Radiated Emission

12V

HORIZONTAL

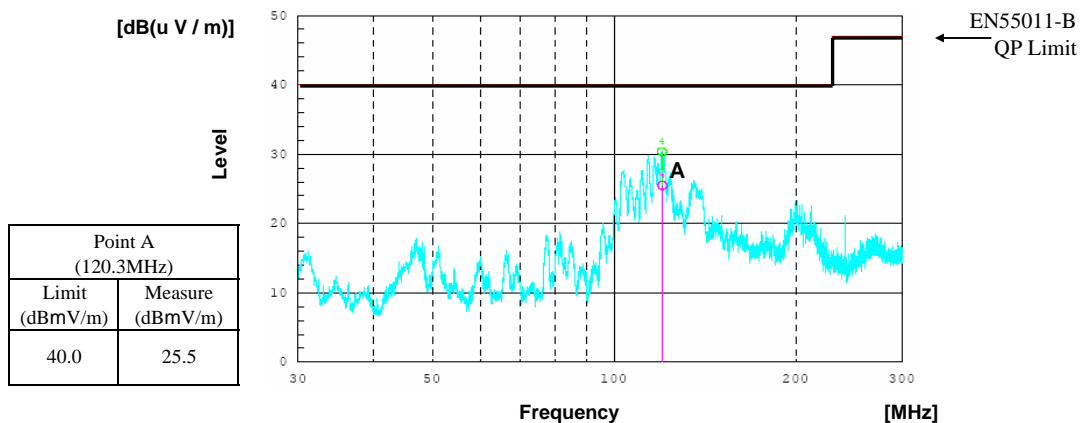

VERTICAL

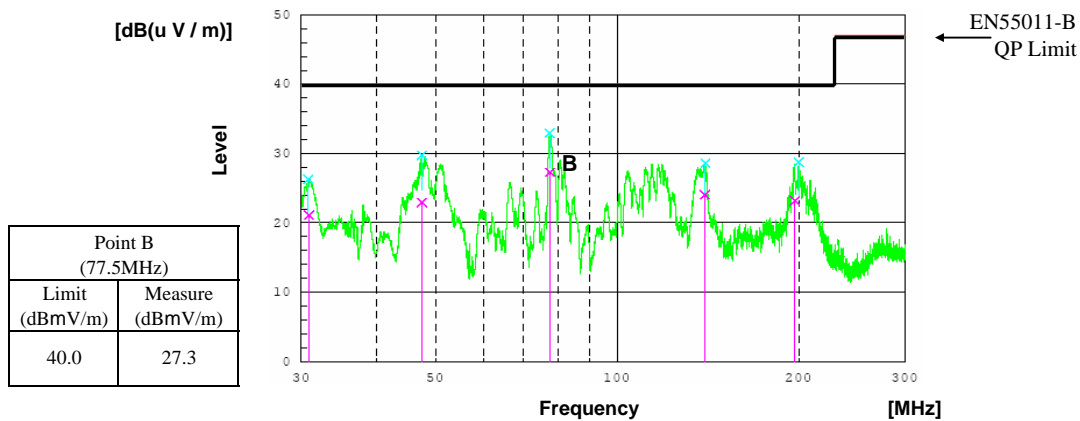


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 230VAC  
Iout : 100%


Radiated Emission

12V

HORIZONTAL

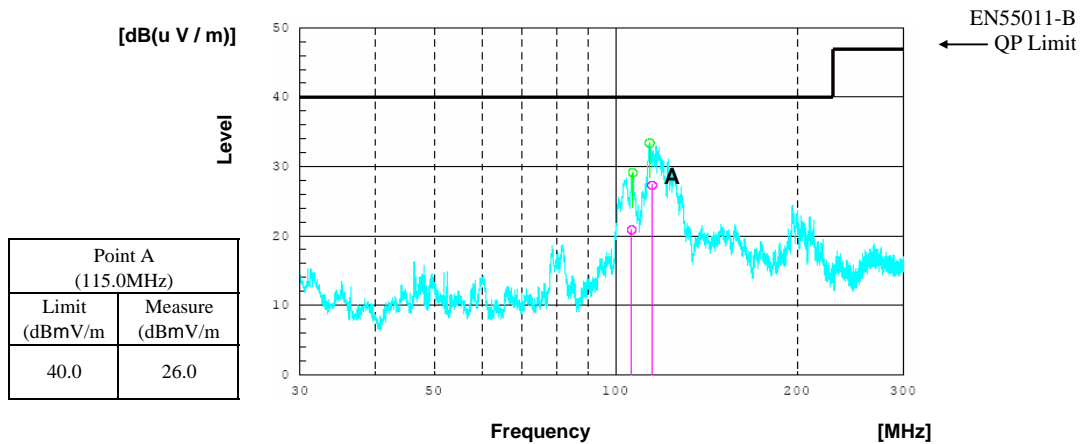

VERTICAL

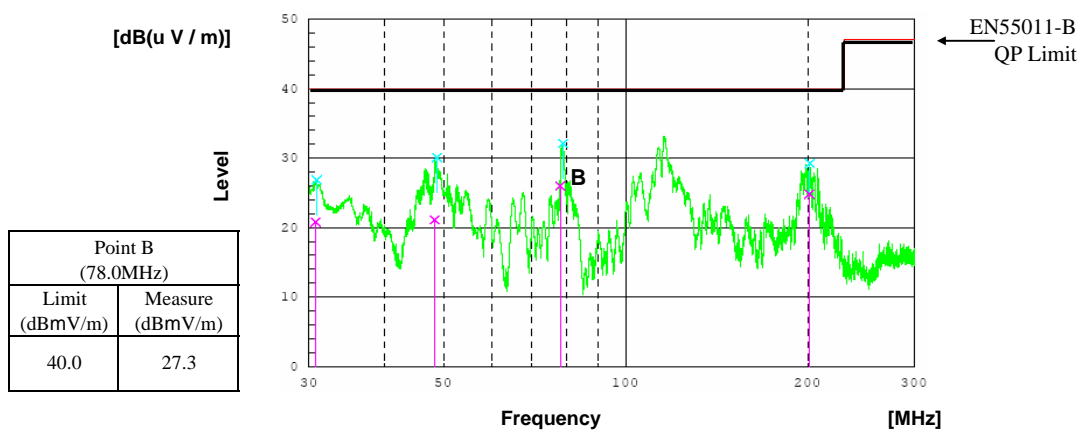


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 115VAC  
Iout : 100%


Radiated Emission

24V

HORIZONTAL

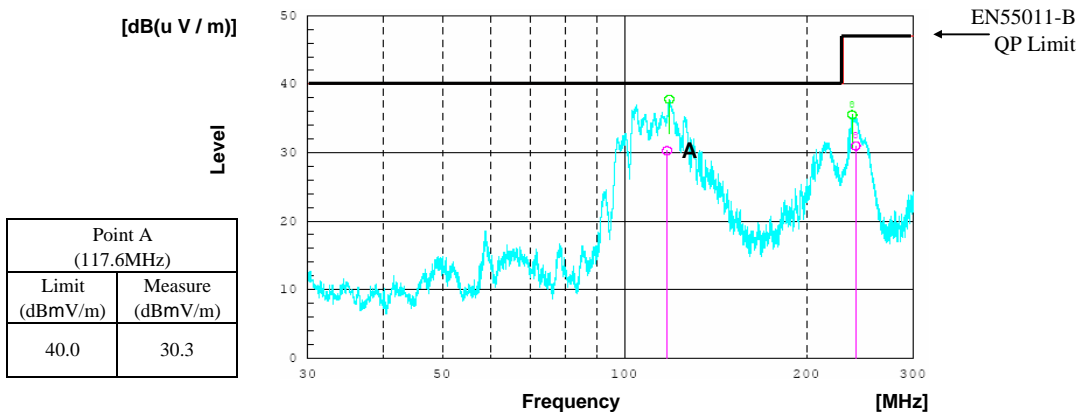

VERTICAL

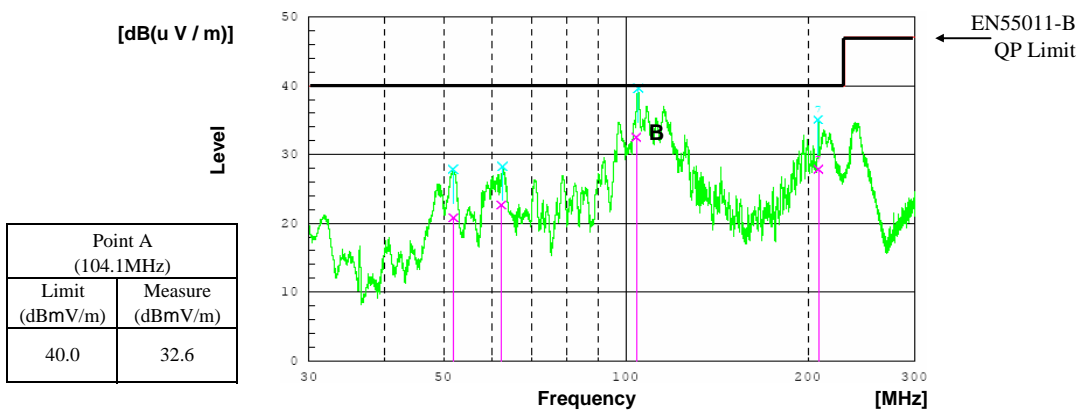


2-15 Electro-Magnetic Interference characteristics

Conditions: Vin : 230VAC  
Iout : 100%

Radiated Emission

24V

HORIZONTAL

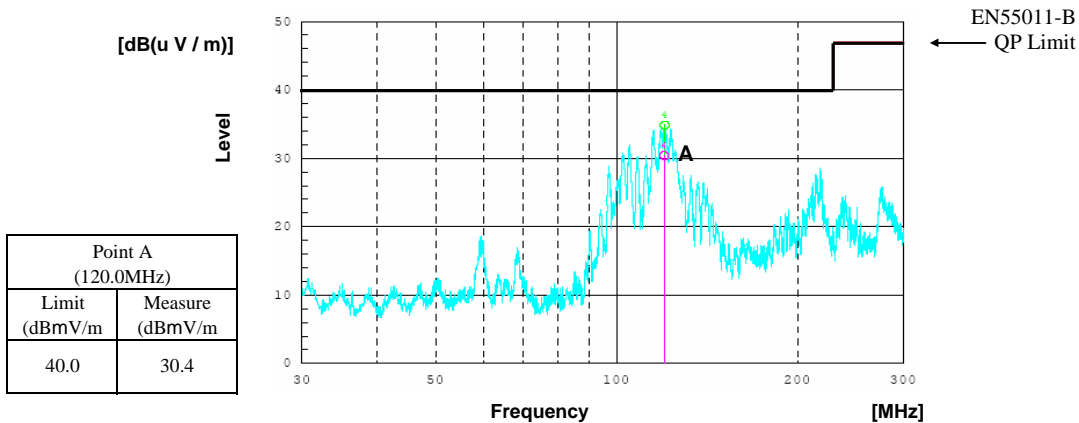

VERTICAL

