

SWS75

EVALUATION DATA

DWG No. CA730-53-01			
QA APPD	APPD	CHK	DWG
	 23.May.03	 15.May'03	 15.May'03

INDEX


1. Evaluation Method	PAGE
1.1 Circuit used for determination	T-1~4
(1) Steady state data	
(2) Over current protection (OCP) characteristics	
(3) Over voltage protection (OVP) characteristics	
(4) Output rise characteristics	
(5) Output fall characteristics	
(6) Dynamic load response characteristics	
(7) Inrush current characteristics	
(8) Leakage current characteristics	
(9) Output ripple and noise waveform	
(10) Electro Magnetic Interference characteristics	
1.2 List of equipment used	T-5
2. Characteristics	
2.1 Steady state data	
(1) Regulation - line and load, temperature drift	T-6
(2) Output voltage and ripple voltage vs. input voltage	T-7
(3) Efficiency and input current vs. output current	T-8
2.2 Over current protection (OCP) characteristics	T-9~11
2.3 Over voltage protection (OVP) characteristics	T-12
2.4 Output rise characteristics	T-13~14
2.5 Output fall characteristics	T-15~16
2.6 Hold up time characteristics	T-17
2.7 Dynamic load response characteristics	T-18~23
2.8 Response to brown out characteristics	T-24~25
2.9 Inrush current waveform	T-26~27
2.10 Leakage current characteristics	T-28
2.11 Output ripple and noise waveform	T-29~32
2.12 Electro Magnetic Interference characteristics	T-33~44

Terminology used

	Definition
Vin	Input voltage
Vout	Output voltage
Iin	Input current
Iout	Output current
Ta	Ambient temperature

1.1 Circuit used for determination


(1) Steady state data

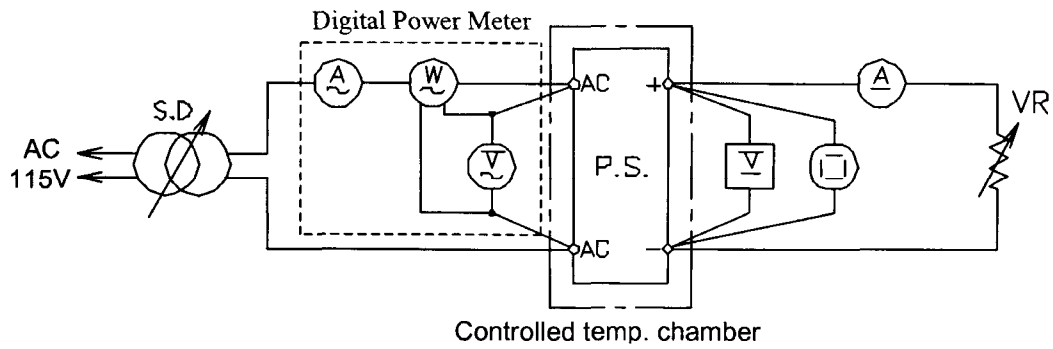


(2) Over current protection (O.C.P) characteristics

Same as steady state data.

(3) Over voltage protection (O.V.P) characteristics

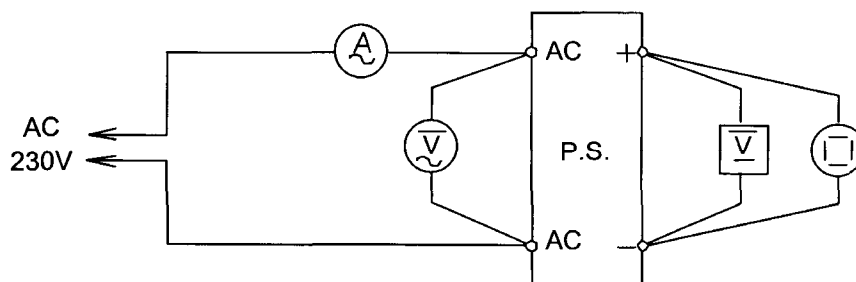


(4) Output rise characteristics

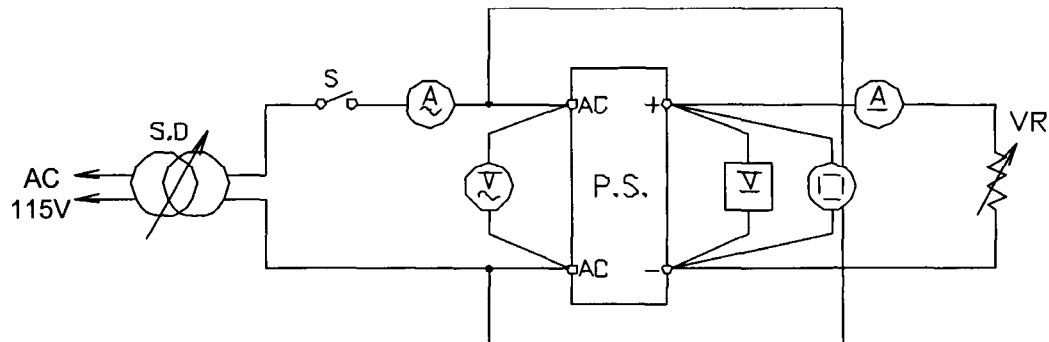


(5) Output fall characteristics

Same as output rise characteristics.


(6) Dynamic load response characteristics

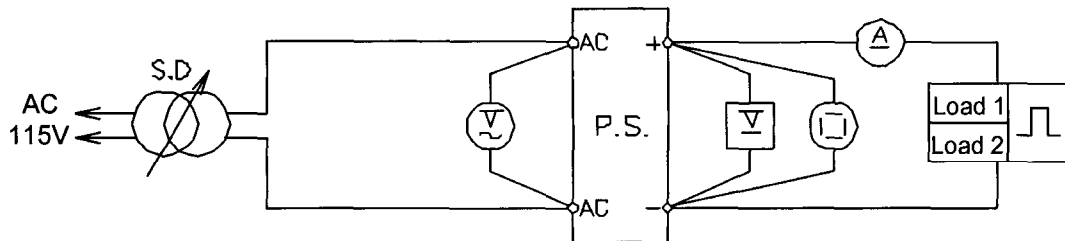


Output current waveform :
I_{out} 0% ↔ 100%

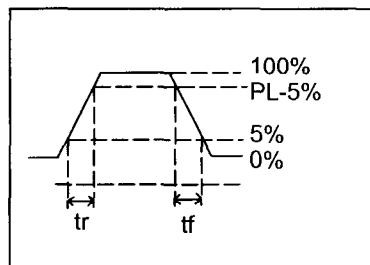


Output current waveform :
I_{out} 50% ↔ 100%

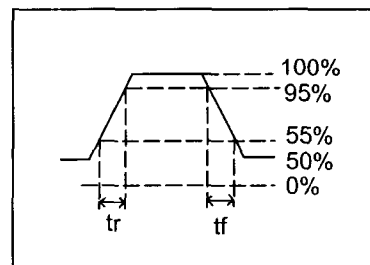

(7) Inrush current characteristics

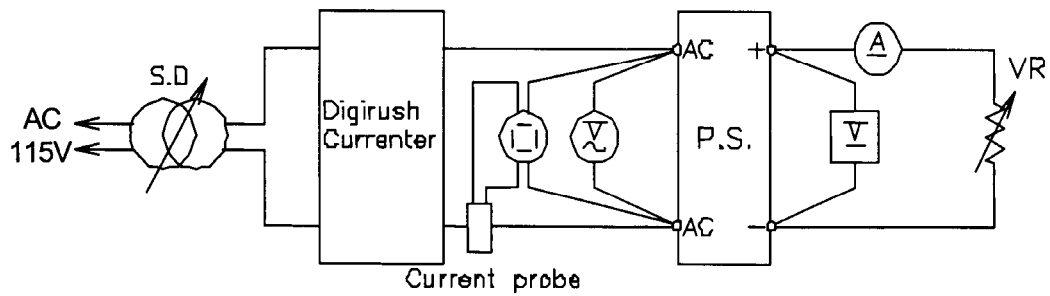


(8) Leakage current characteristics

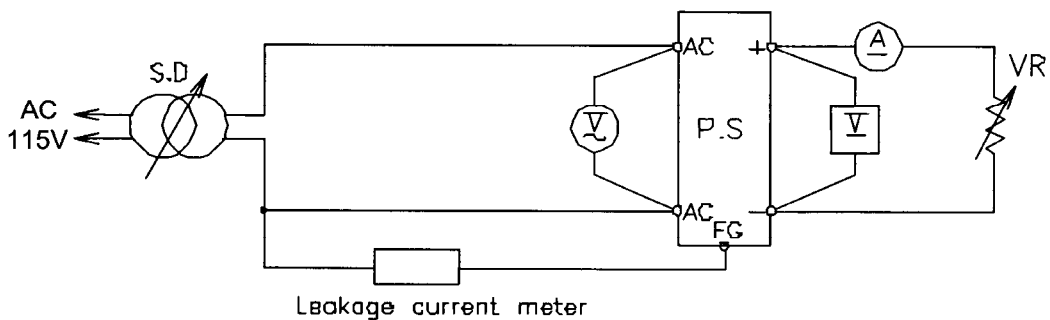


Note : Leakage current measured through a 1k ohm resistor.
Range used : AC + DC (For SIMPSON MODEL 228)

(9) Output - ripple, noise waveform

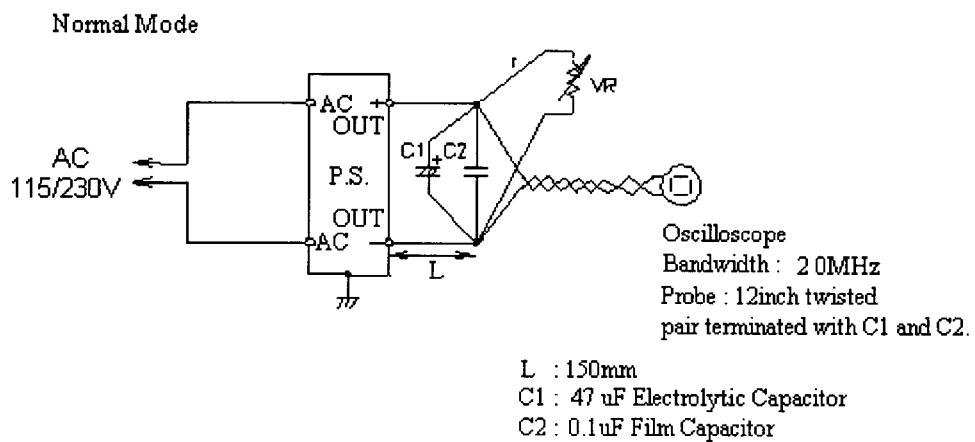


(10) Electro-Magnetic Interference characteristics

(a) Conducted Emission Noise

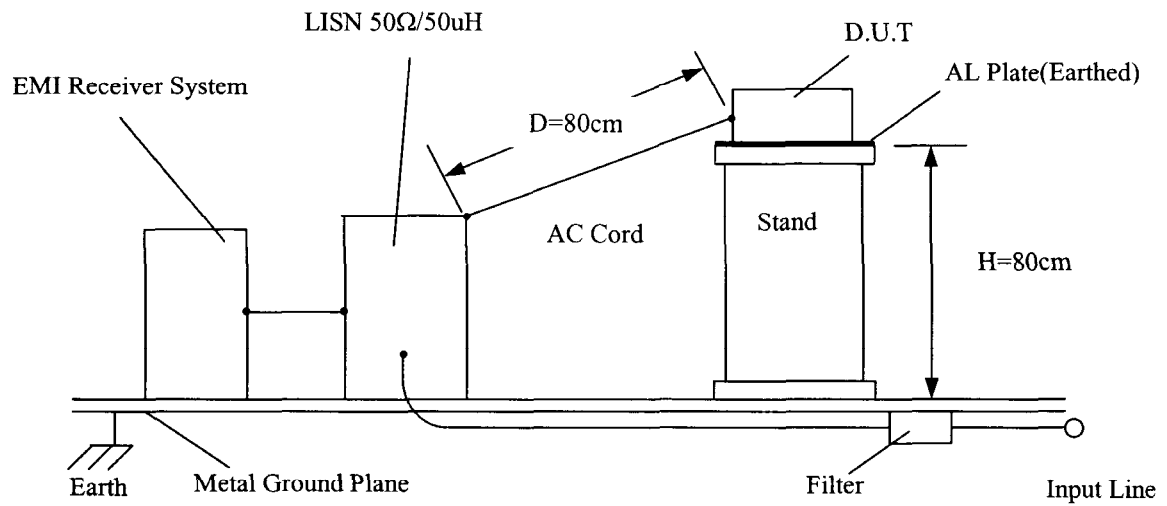

(b) Radiated Emission Noise

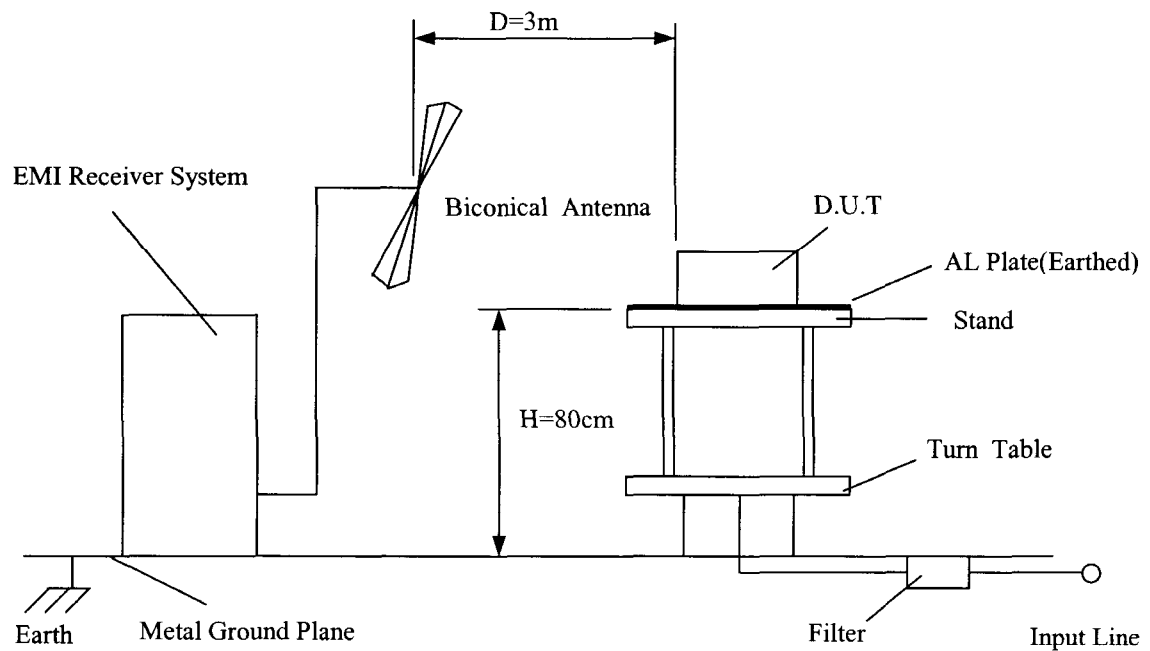

1.2 LIST OF EQUIPMENT USED

	EQUIPMENT USED	MANUFACTURER	MODEL NO.
1	Oscilloscope	HITACHI	V-1050F
2	Digital storage oscilloscope	TEKTRONIX	TDS 540A
3	Digital volt meter	FLUKE	45
4	Digital power meter	YOKOGAWA	WT110
5	DC ampere meter	YOKOGAWA	2051
6	Dynamic dummy load	Chroma	63030
7	Current probe/amplifier	TEKTRONIX	A6303/AM503B
8	Controlled temperature chamber	TABAI-ESPEC	SU-240
9	Leakage current meter	SIMPSON	228
10	Digirush currenter	TAKAMIZAWA CYBERNETICS	PSA-200
11	EMI receiver	HEWLETT PACKARD	HP8546A
12	LISN	EMCO	3825/2
13	Biconical antenna	EMCO	3110B

2. Characteristics

2.1 Steady state data

(1) Regulation - line and load, temperature drift

5V

1. Regulation-line and load

condition $T_a : 25^{\circ}\text{C}$

$I_{out} \setminus V_{in}$	85VAC	115VAC	230VAC	265VAC	line regulation	
0%	5.023V	5.023V	5.023V	5.023V	0.000V	0.000%
50%	5.003V	5.003V	5.003V	5.003V	0.000V	0.000%
100%	4.983V	4.983V	4.984V	4.983V	0.001V	0.020%
load regulation	0.040V	0.040V	0.039V	0.040V		
	0.800%	0.800%	0.780%	0.800%		

2. Temperature drift

conditions $V_{in} = 115\text{VAC}$
 $I_{out} = 100\%$

T_a	-10°C	$+25^{\circ}\text{C}$	$+50^{\circ}\text{C}$	temperature stability	
V_{out}	4.992V	4.983V	4.974V	0.018V	0.360%

12V

1. Regulation-line and load

condition $T_a : 25^{\circ}\text{C}$

$I_{out} \setminus V_{in}$	85VAC	115VAC	230VAC	265VAC	line regulation	
0%	12.023V	12.023V	12.024V	12.023V	0.001V	0.008%
50%	12.017V	12.017V	12.016V	12.015V	0.002V	0.017%
100%	12.010V	12.010V	12.009V	12.007V	0.003V	0.025%
load regulation	0.013V	0.013V	0.015V	0.016V		
	0.108%	0.108%	0.125%	0.133%		

2. Temperature drift

conditions $V_{in} = 115\text{VAC}$
 $I_{out} = 100\%$

T_a	-10°C	$+25^{\circ}\text{C}$	$+50^{\circ}\text{C}$	temperature stability	
V_{out}	12.022V	12.010V	12.005V	0.012V	0.100%

24V

1. Regulation-line and load

condition $T_a : 25^{\circ}\text{C}$

$I_{out} \setminus V_{in}$	85VAC	115VAC	230VAC	265VAC	line regulation	
0%	24.007V	24.008V	24.008V	24.009V	0.002V	0.008%
50%	24.002V	24.003V	24.004V	24.004V	0.002V	0.008%
100%	23.999V	23.999V	24.001V	24.001V	0.002V	0.008%
load regulation	0.008V	0.009V	0.007V	0.008V		
	0.033%	0.038%	0.029%	0.033%		

2. Temperature drift


conditions $V_{in} = 115\text{VAC}$
 $I_{out} = 100\%$

T_a	-10°C	$+25^{\circ}\text{C}$	$+50^{\circ}\text{C}$	temperature stability	
V_{out}	23.986V	23.999V	24.008V	0.022V	0.092%


2.1 (2) Output voltage and Ripple voltage v.s. Input voltage

Conditions Iout : 100%
 Ta : -10°C -----
 : 25°C - · - · -
 : 50°C _____


5V

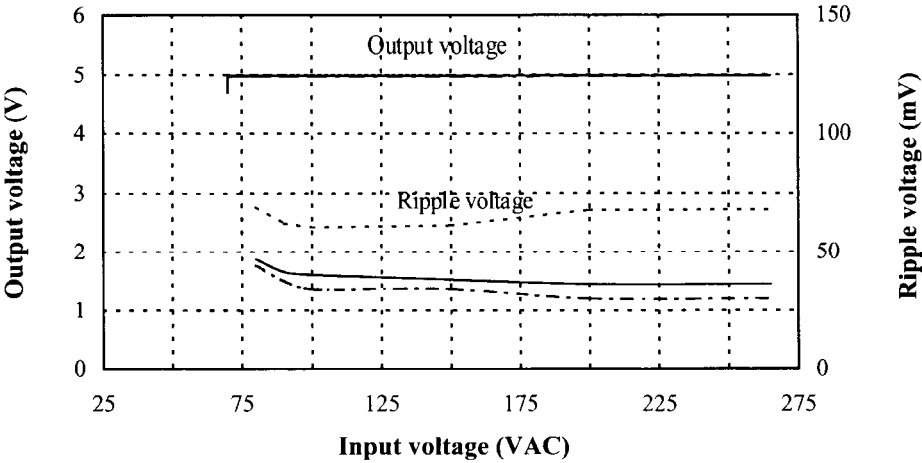

12V

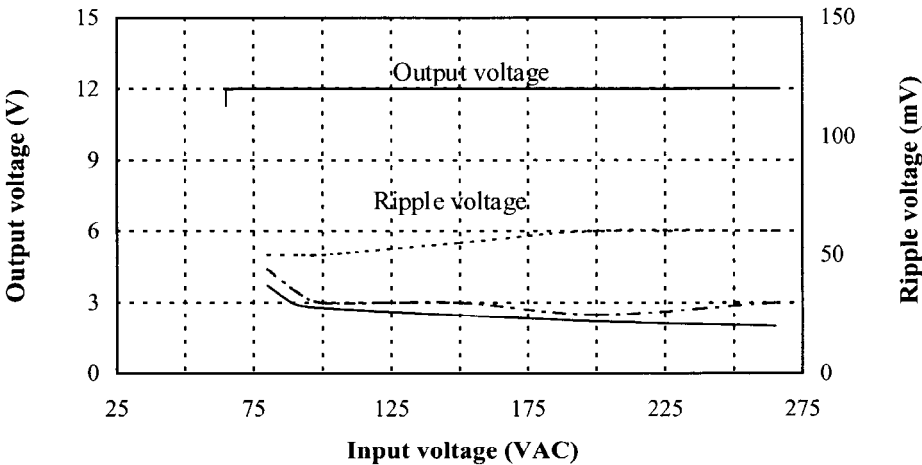

24V

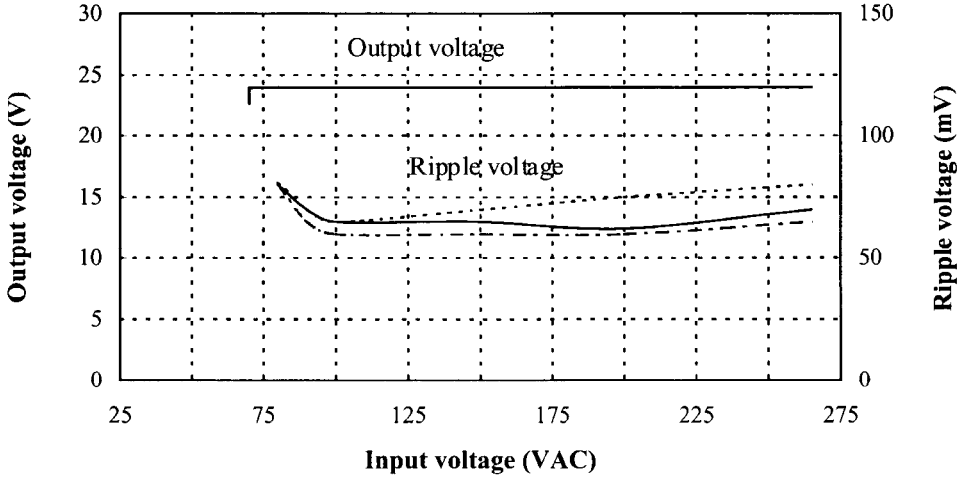


2.1 (3) Efficiency and input current v.s. Output current


Conditions Vin : 85VAC -----
 : 115VAC - - - - -
 : 230VAC ————
 : 265VAC - · - · -

Ta : 25°C


5V

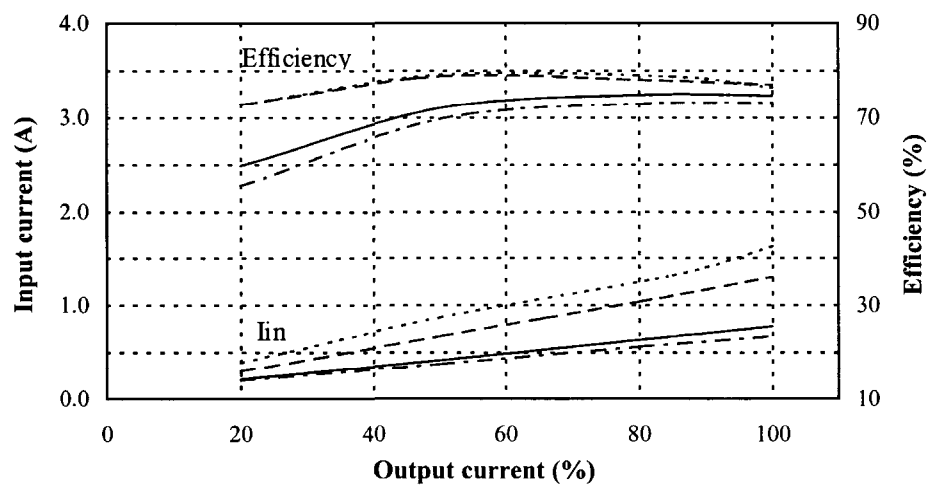

12V

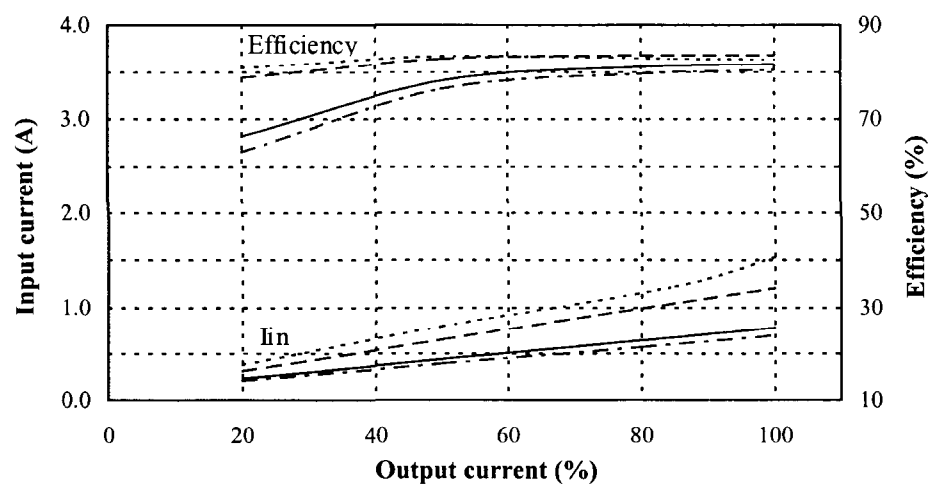

24V

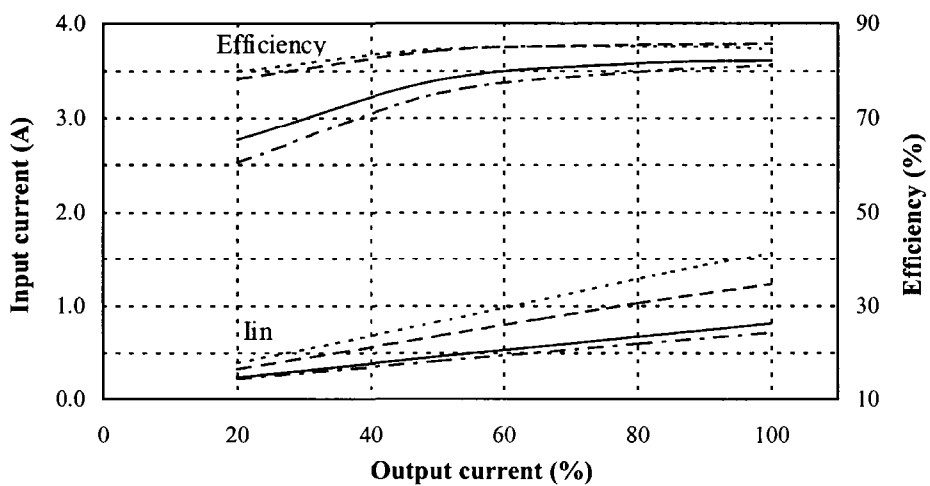

2.2 Over current protection (OCP) characteristics

Conditions


Ta : -10°C

: 25°C


: 50°C

Vin : 115VAC


5V

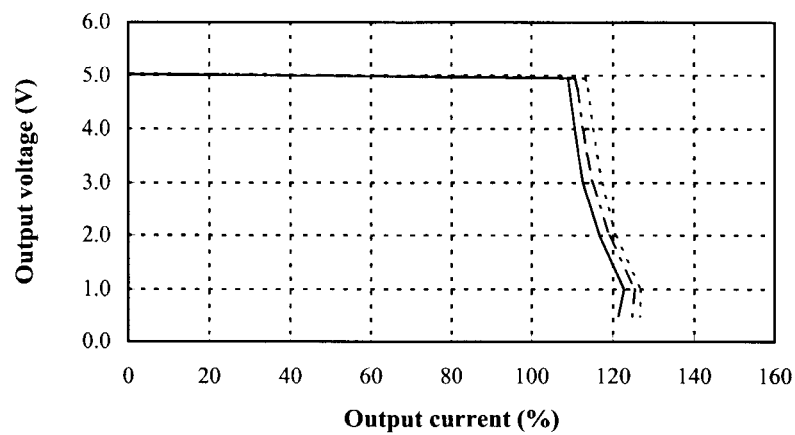

12V

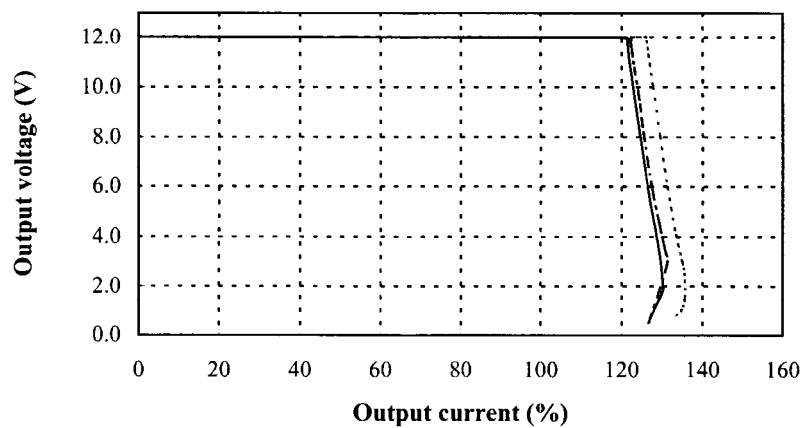


24V

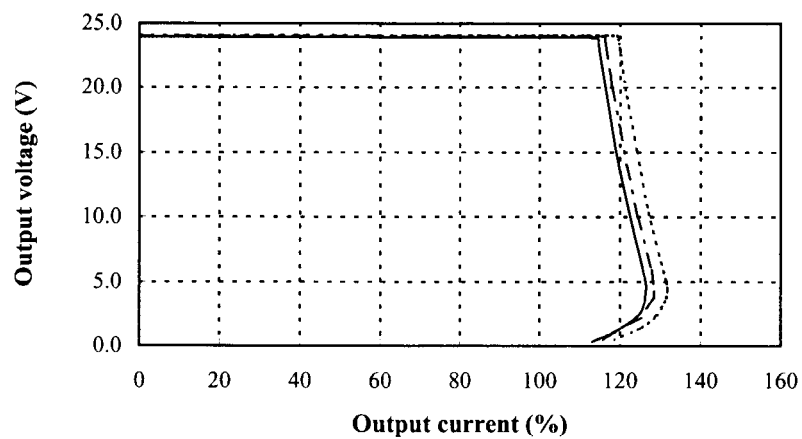


2.2 Over current protection (OCP) characteristics

Conditions Ta : -10°C -----
 : 25°C - · - · -
 : 50°C - - - -
 Vin : 230VAC ———


5V

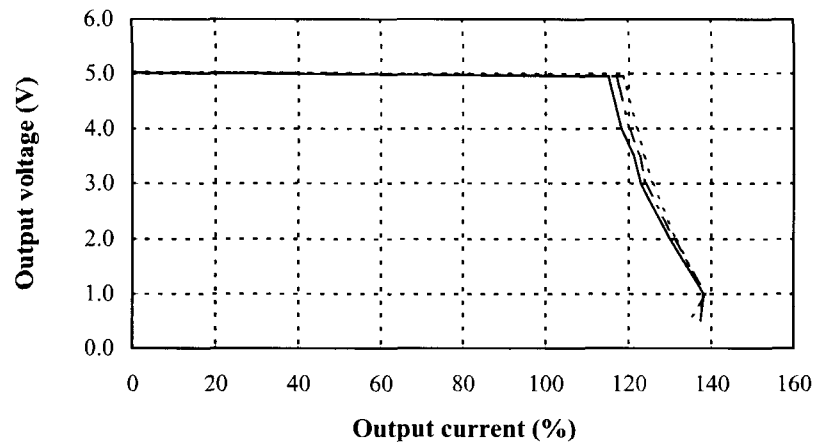

12V

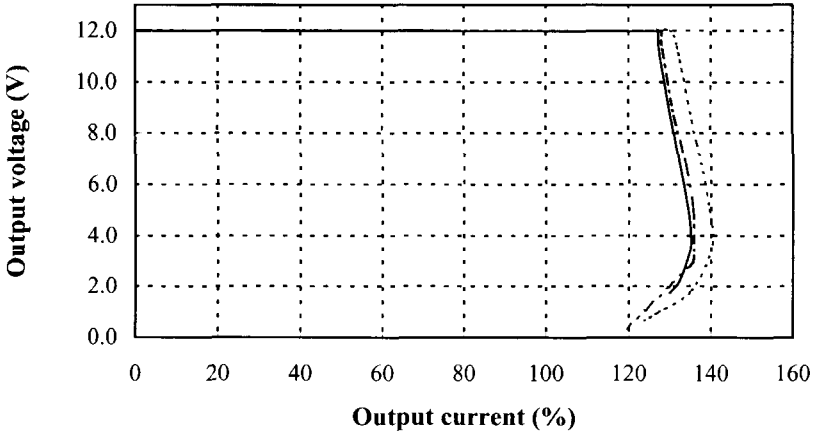


24V

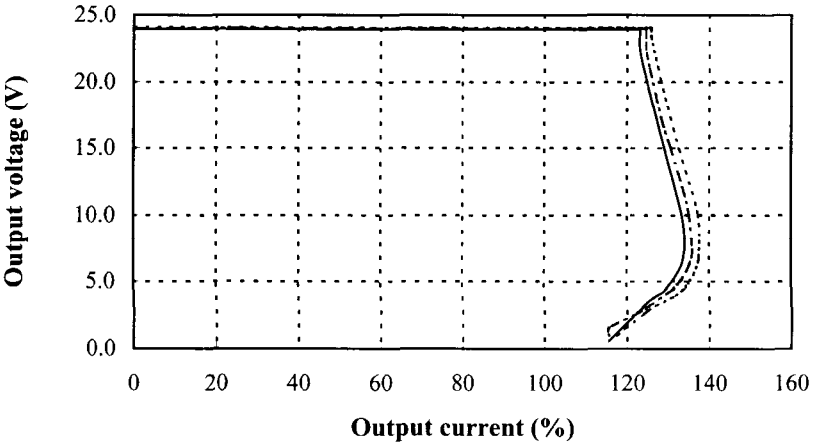


2.2 Over current protection (OCP) characteristics

Conditions Vin : 85VAC
 : 115VAC
 : 230VAC
 : 265VAC
Ta : 25°C


5V

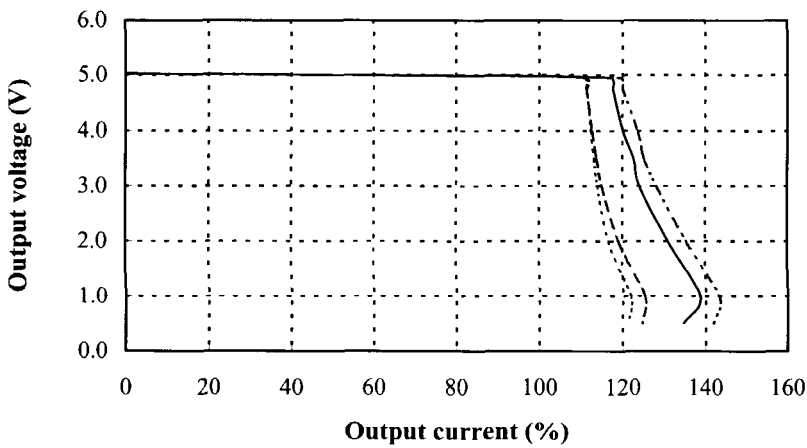

12V

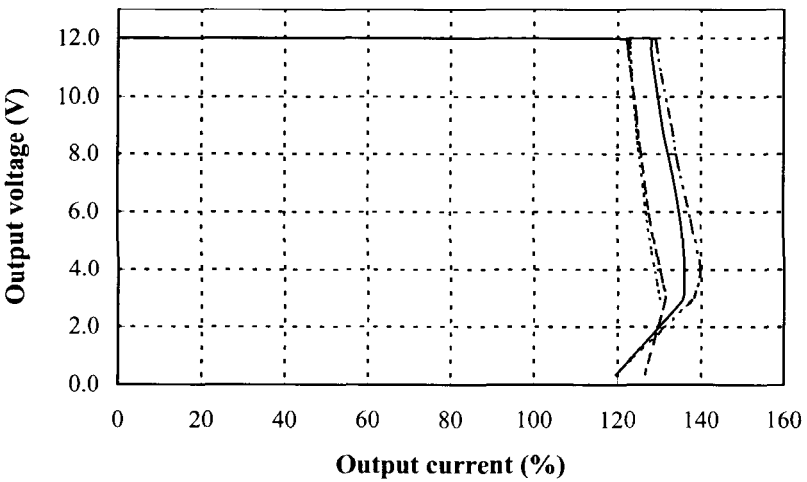


24V

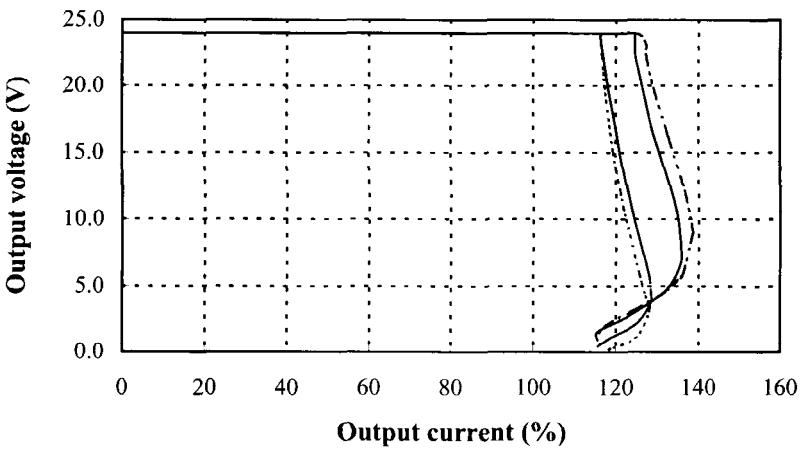

2.3 Over voltage protection (OVP) characteristics


Conditions V_{in} : 230VAC
 I_{out} : 0%
 T_a : 25°C

5V

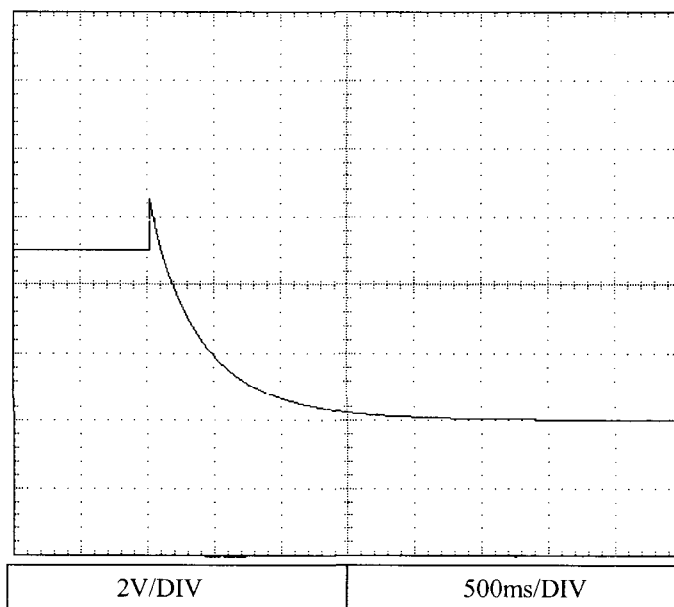


← OVP point
 ← Vout
 ← 0V

12V

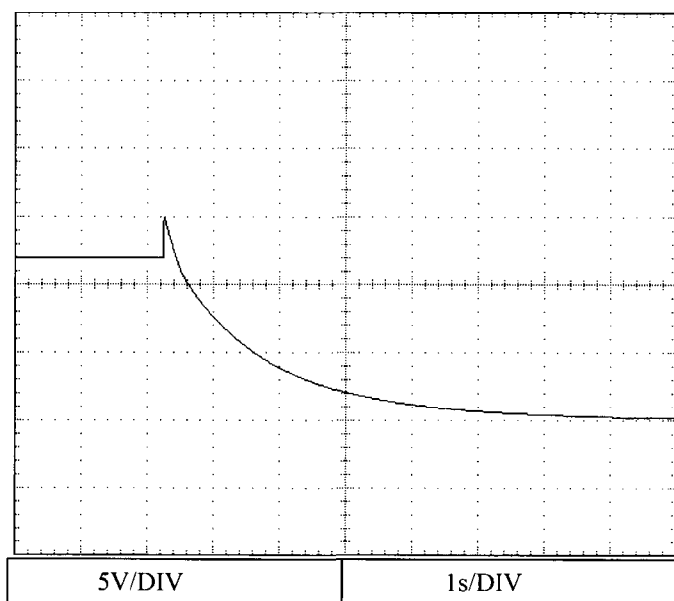

← OVP point
 ← Vout
 ← 0V

24V

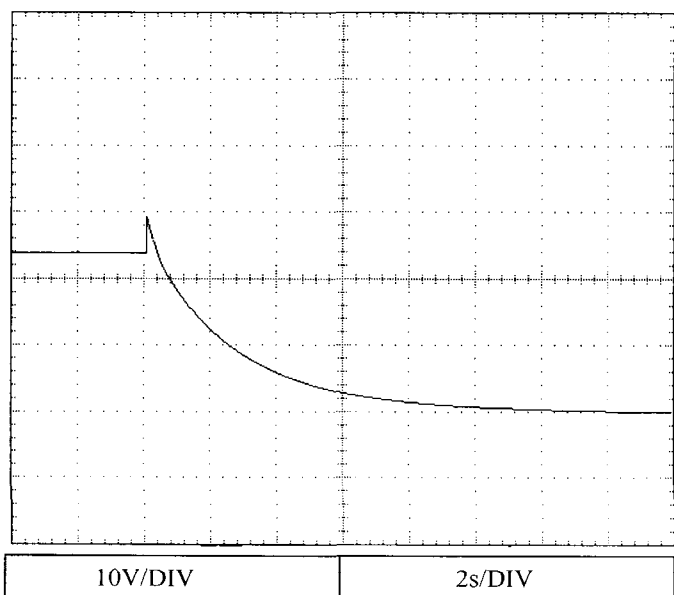


← OVP point
 ← Vout
 ← 0V


2.4 Output rise characteristics

Conditions V_{in} : 85VAC (A)
 : 115VAC (B)
 : 230VAC (C)
 : 265VAC (D)
 I_{out} : 0%
 T_a : 25°C


5V

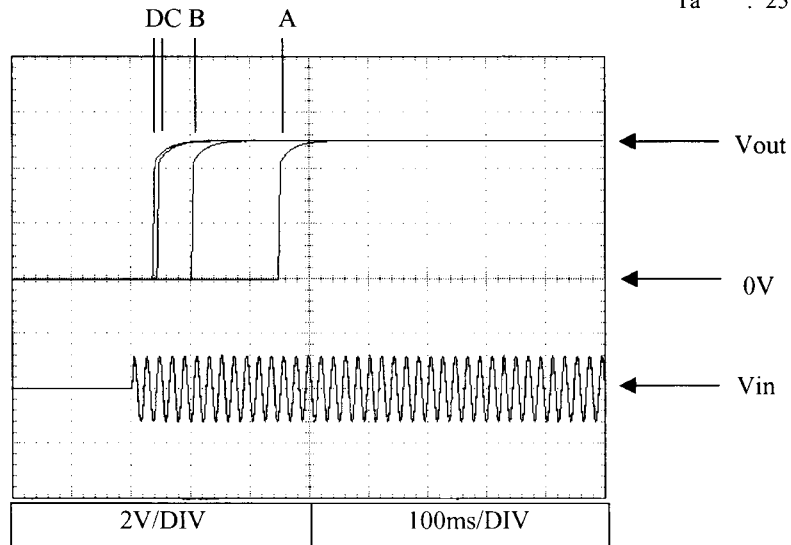

12V



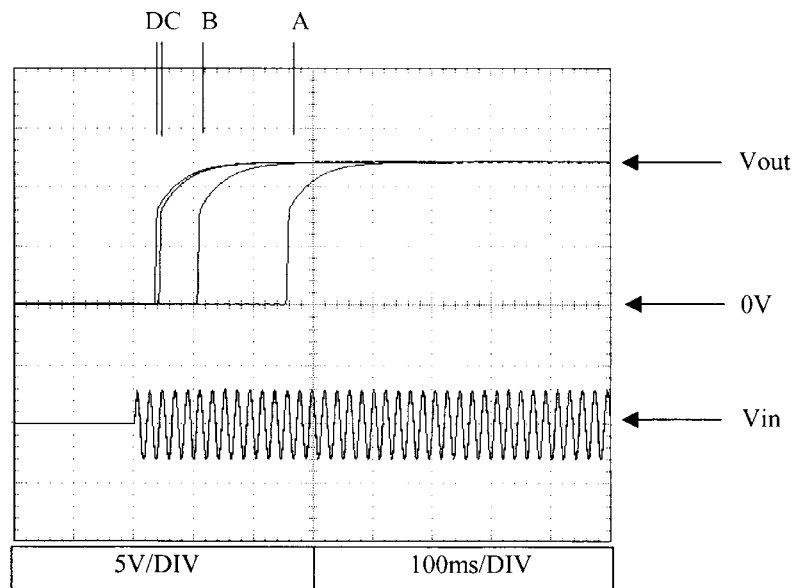


24V

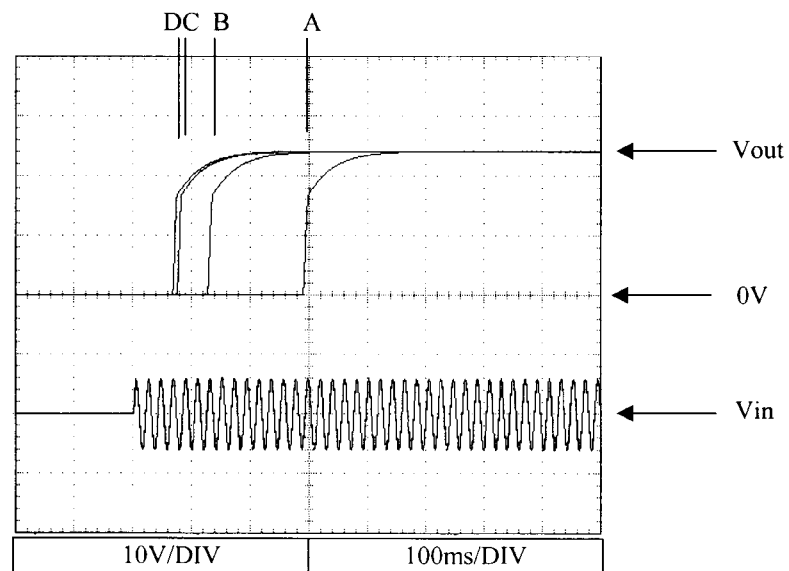

2.4 Output rise characteristics




Conditions V_{in} : 85VAC (A)
 : 115VAC (B)
 : 230VAC (C)
 : 265VAC (D)
 I_{out} : 100%
 T_a : 25°C

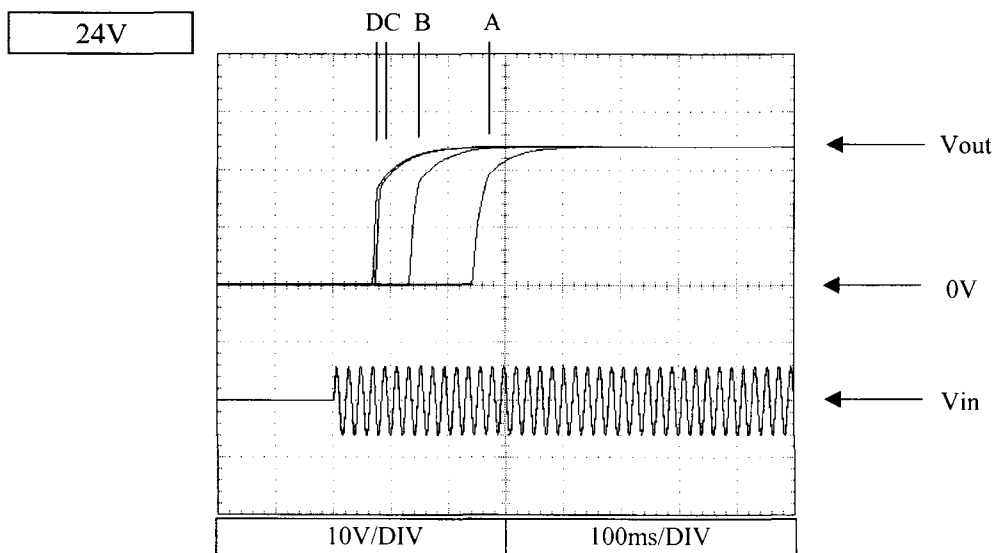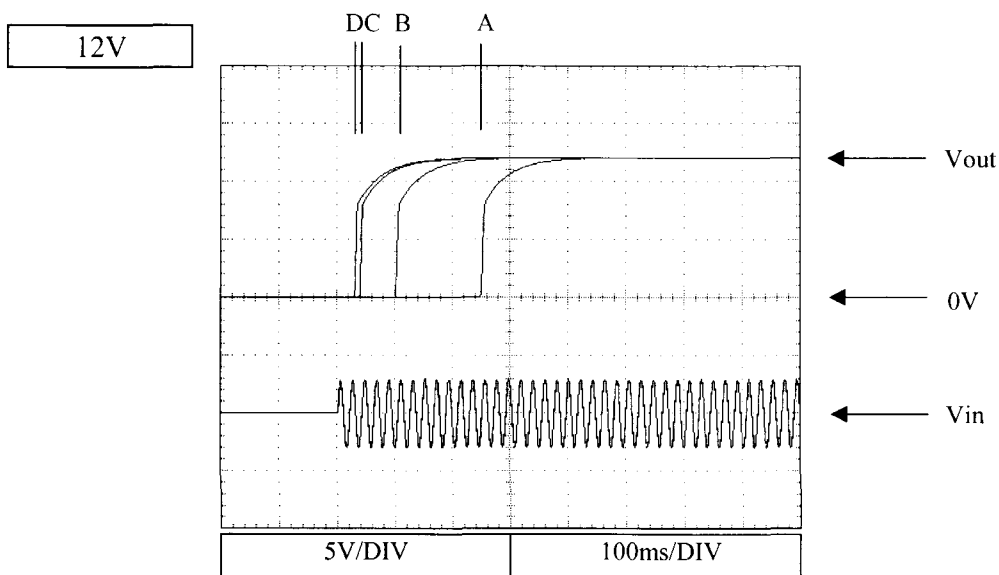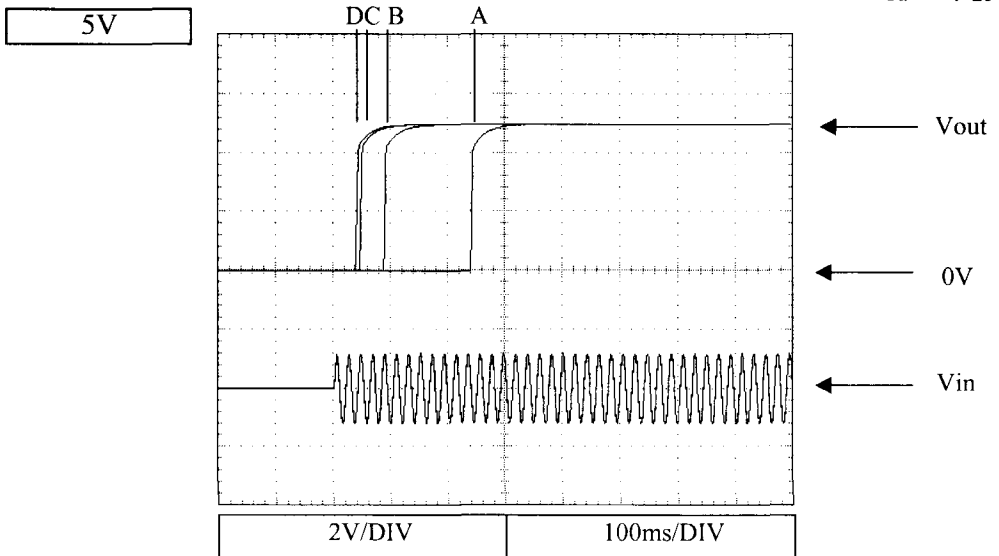

SWS75




2.5 Output fall characteristics

Conditions V_{in} : 85VAC (A)
 : 115VAC (B)
 : 230VAC (C)
 : 265VAC (D)
 I_{out} : 0%
 T_a : 25°C

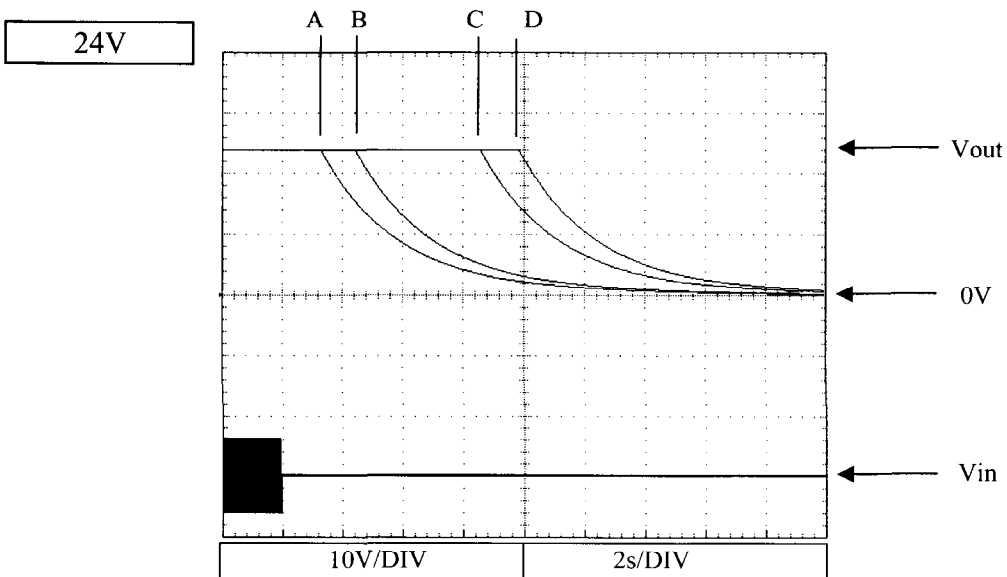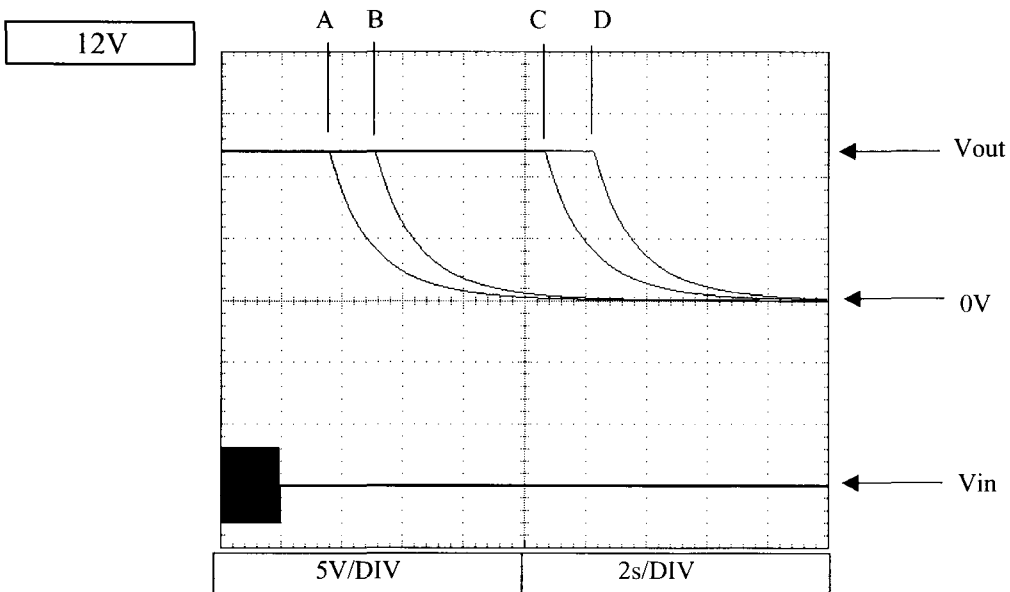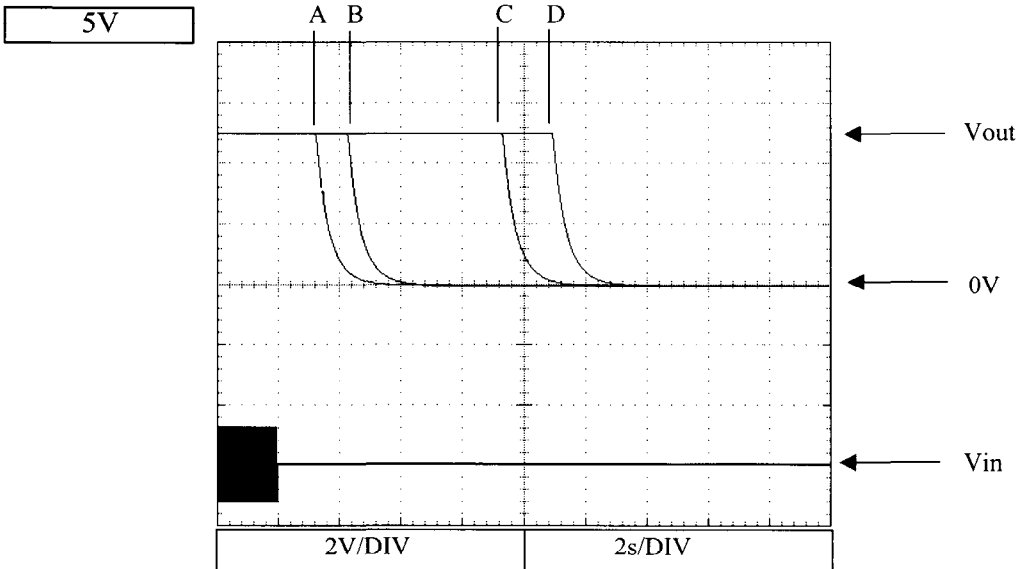

2.5 Output fall characteristics


Conditions V_{in} : 85VAC (A)
 : 115VAC (B)
 : 230VAC (C)
 : 265VAC (D)
 I_{out} : 100%
 T_a : 25°C

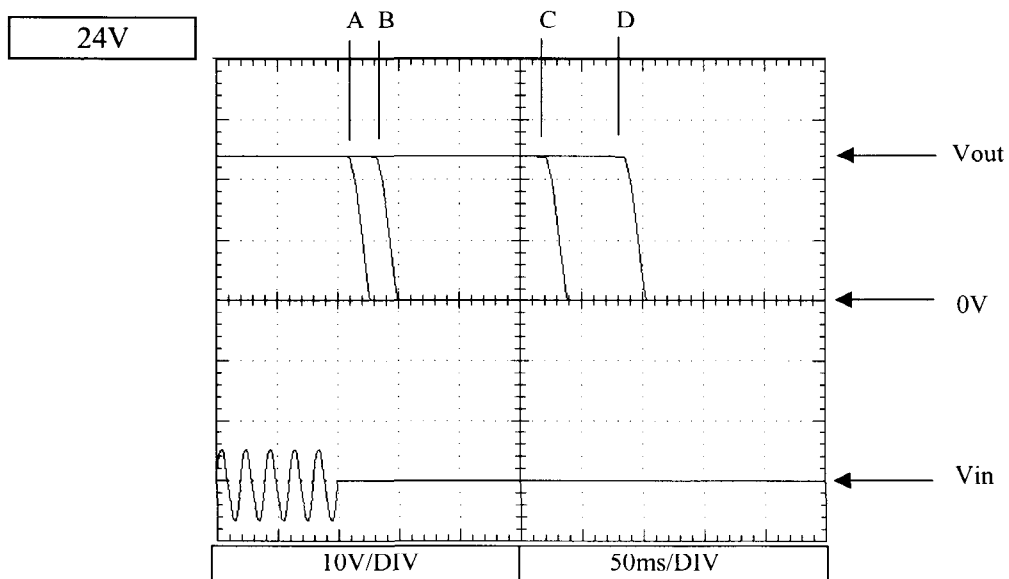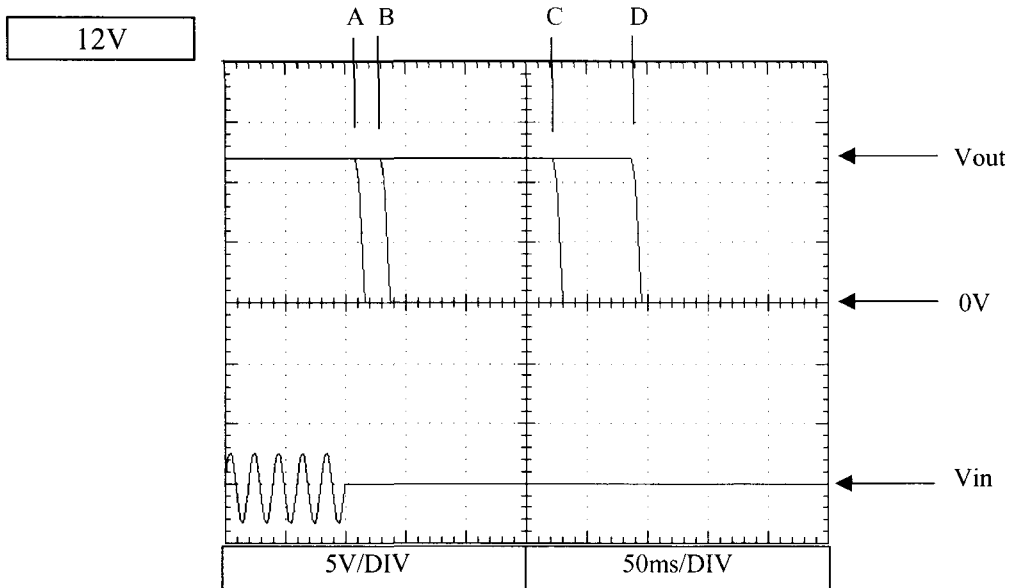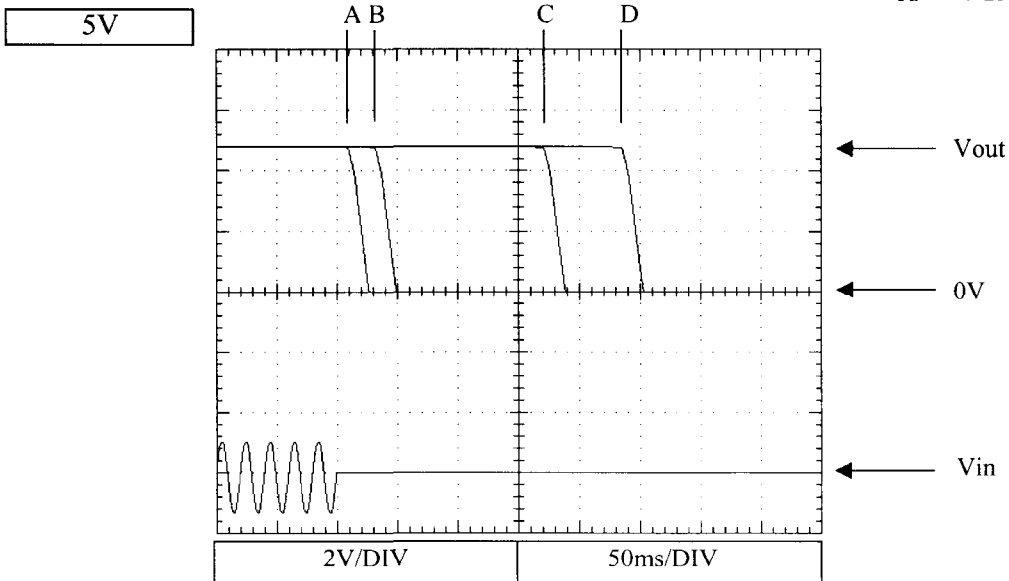


2.6 Hold up time characteristics

Conditions Vin : 115VAC -----
: 230VAC -----
Ta : 25°C


5V

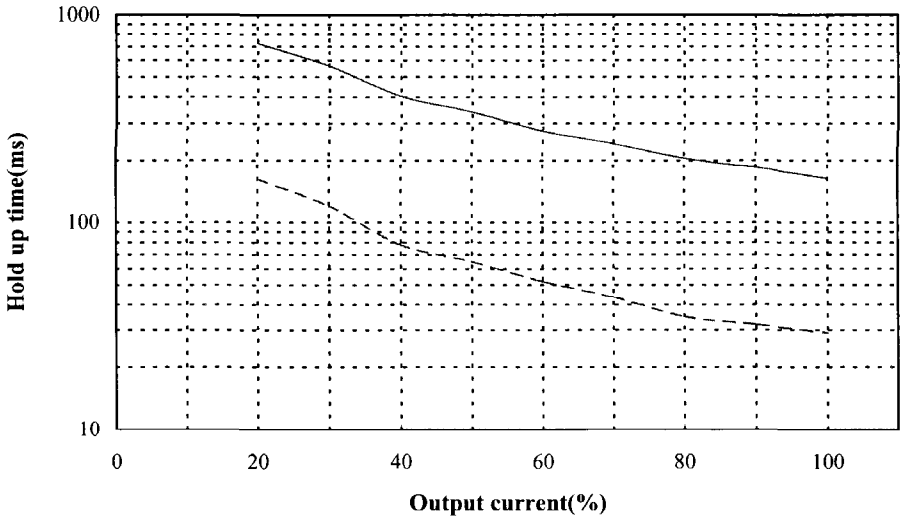

12V

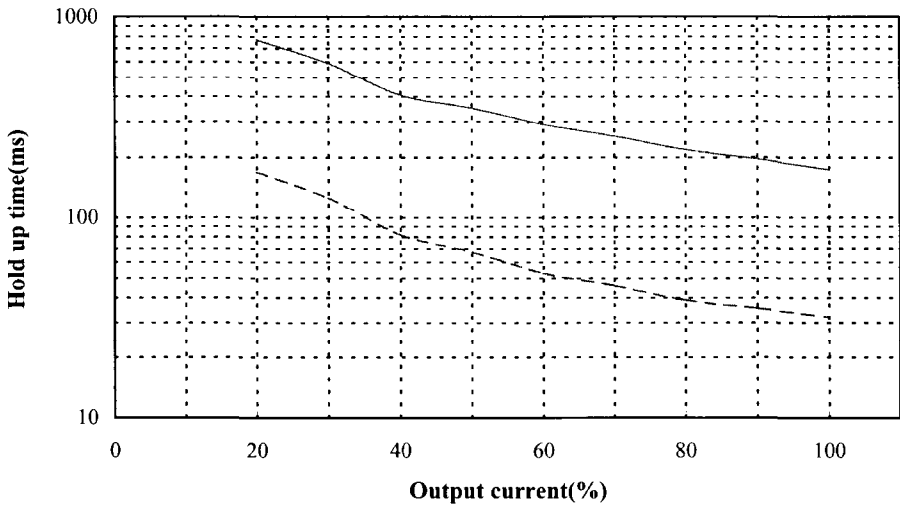

24V

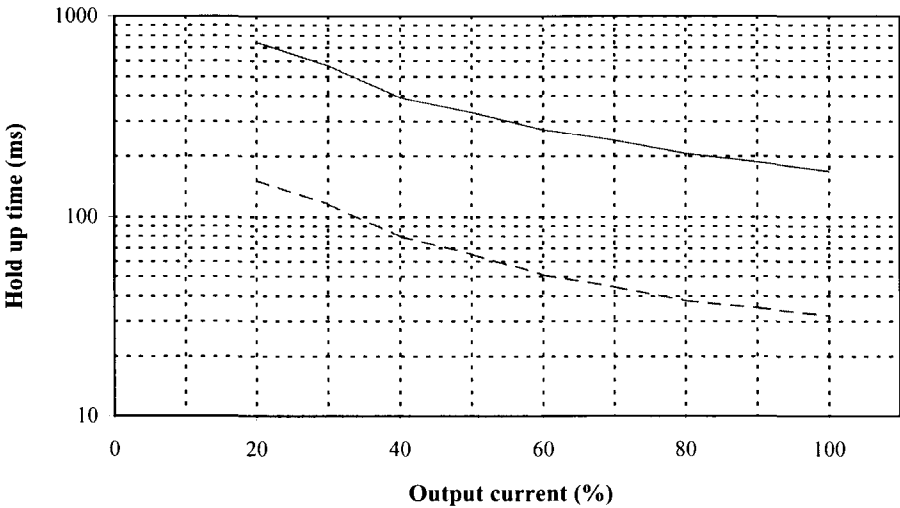


2.7 Dynamic load response characteristics


Conditions V_{in} : 115VAC
 T_a : 25°C

5V

$f=100\text{Hz}$


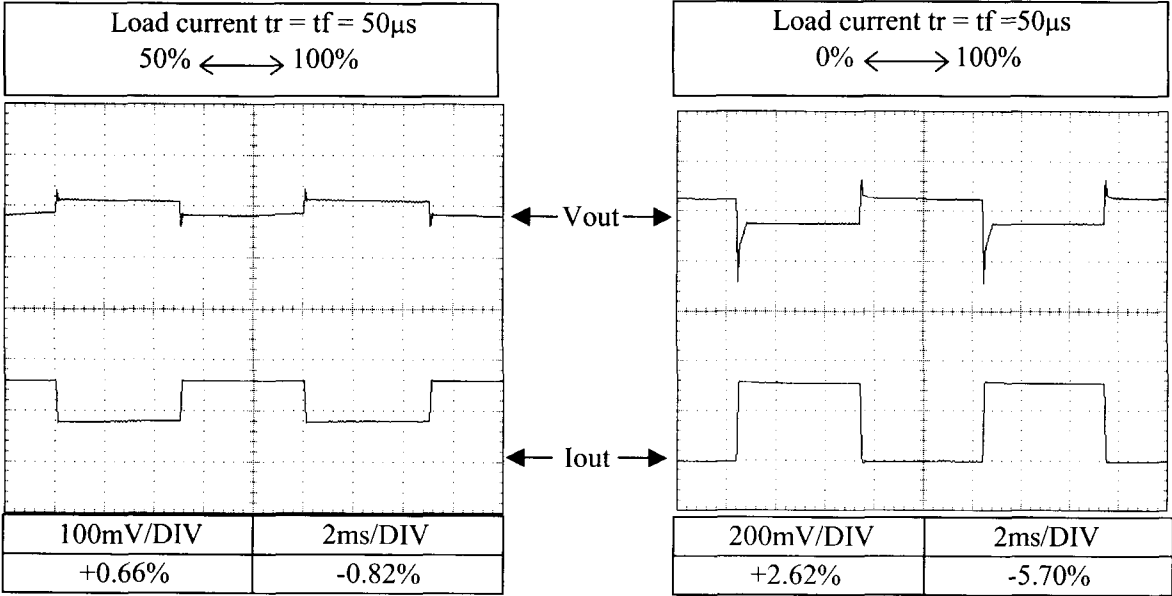


$f=1\text{kHz}$

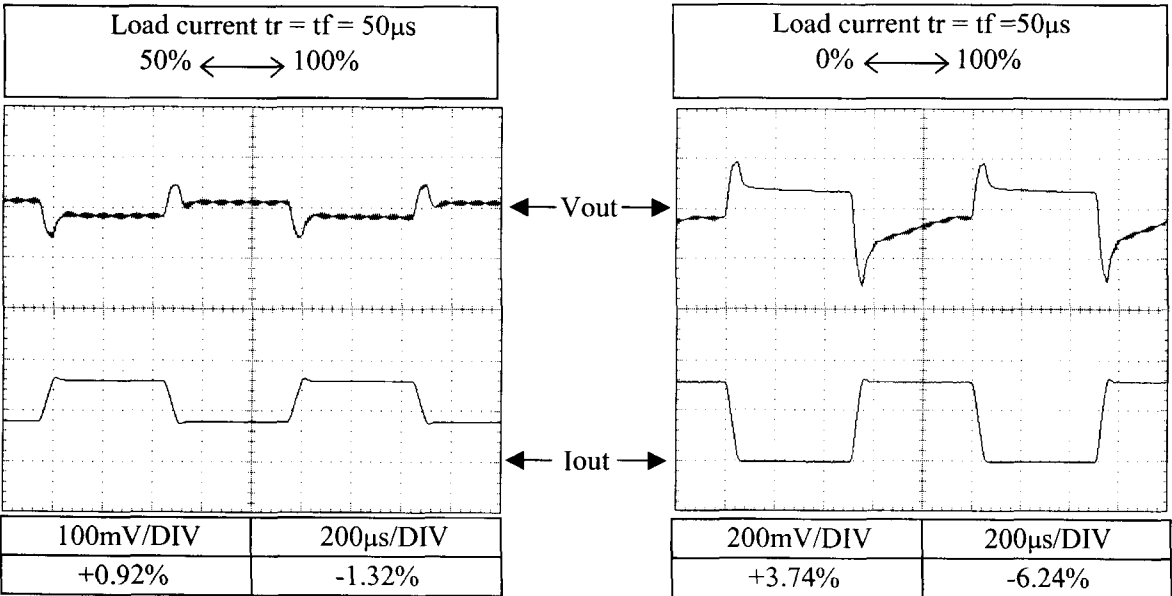

2.7 Dynamic load response characteristics

Conditions Vin : 230VAC
Ta : 25°C

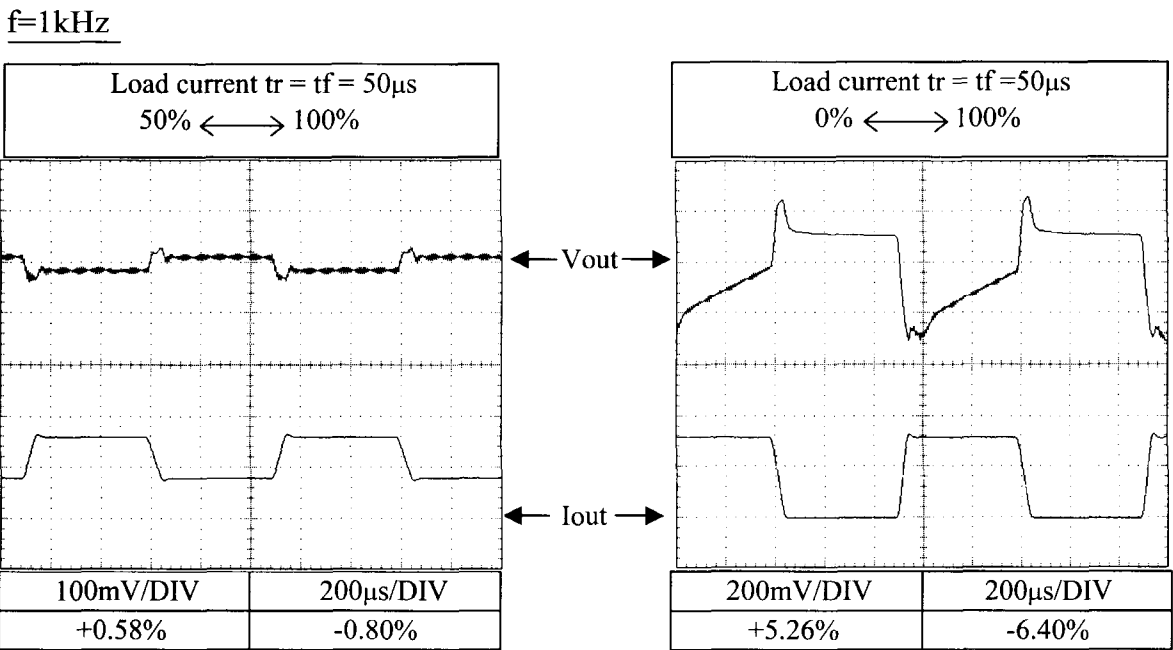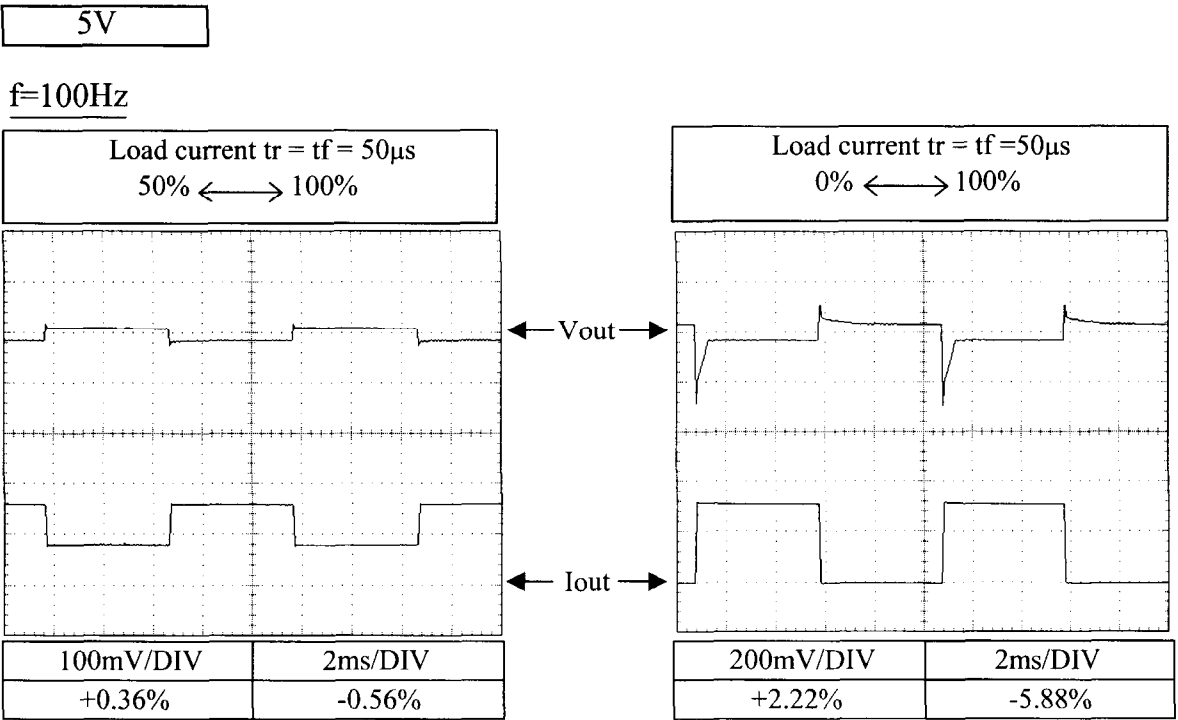


2.7 Dynamic load response characteristics


Conditions V_{in} : 115VAC
 T_a : 25°C

12V

$f=100\text{Hz}$

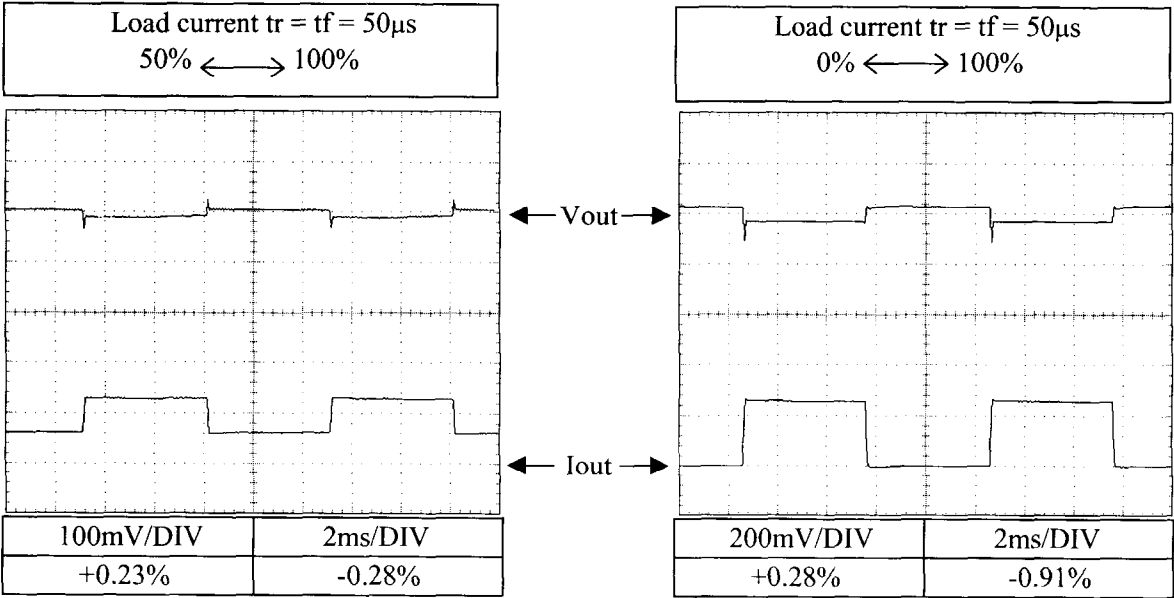

$f=1\text{kHz}$

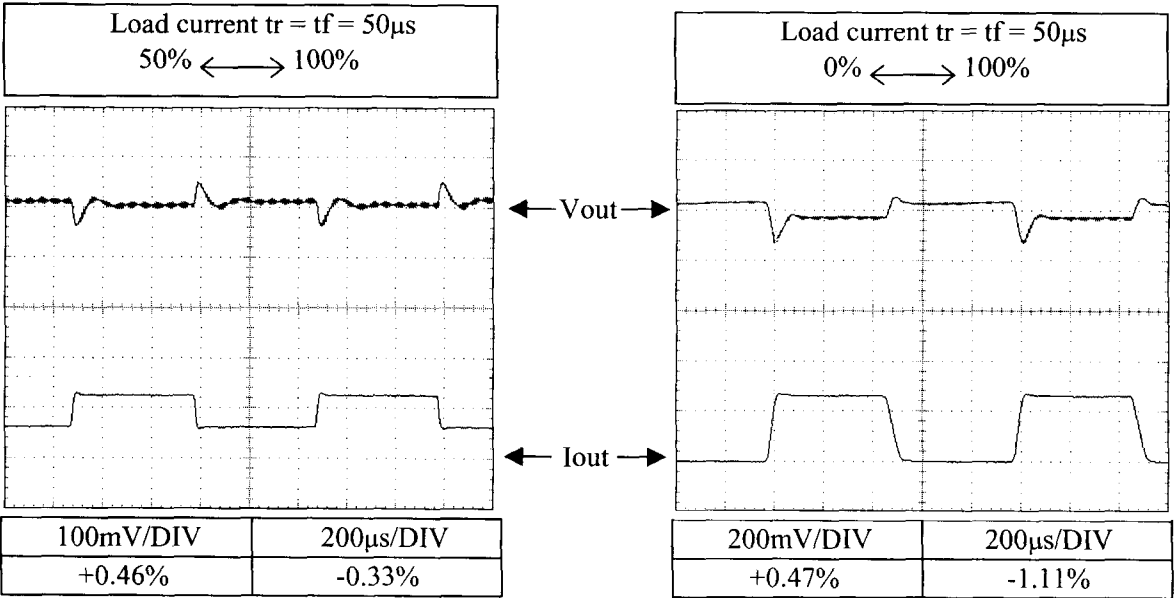


2.7 Dynamic load response characteristics


Conditions Vin : 230VAC
 Ta : 25°C

12V

f=100Hz

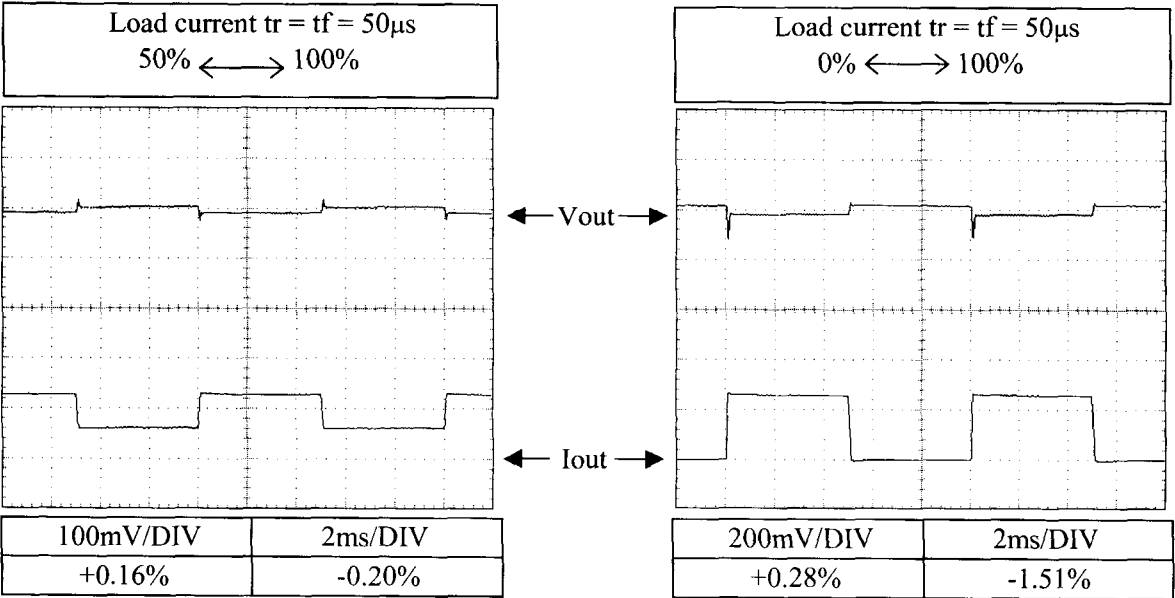

f=1kHz

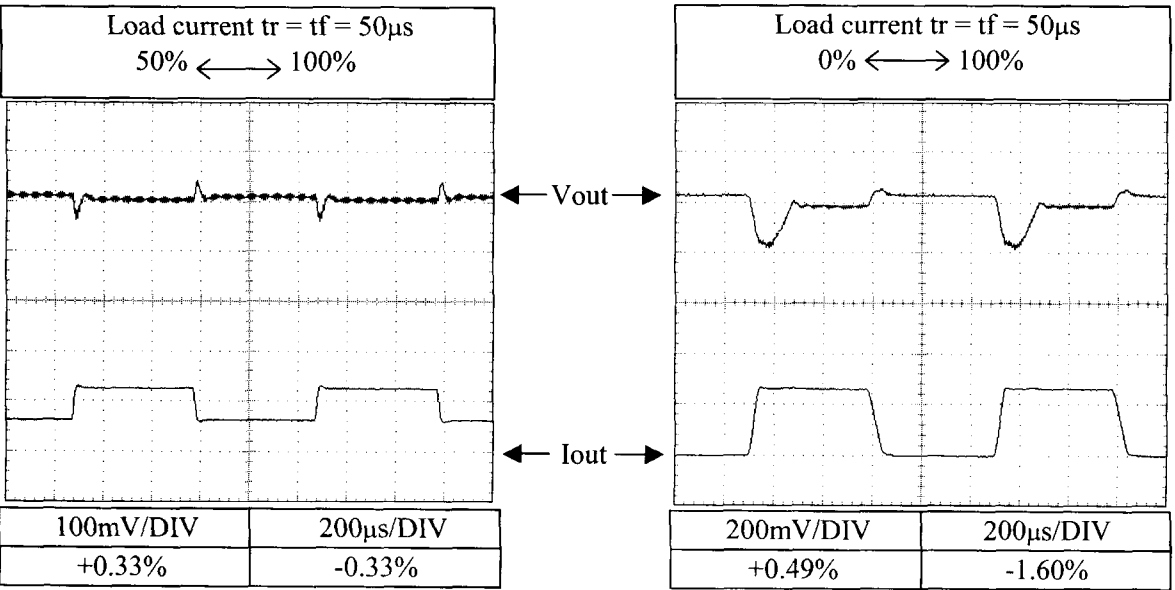


2.7 Dynamic load response characteristics


Conditions Vin : 115VAC
Ta : 25°C

24V

f=100Hz

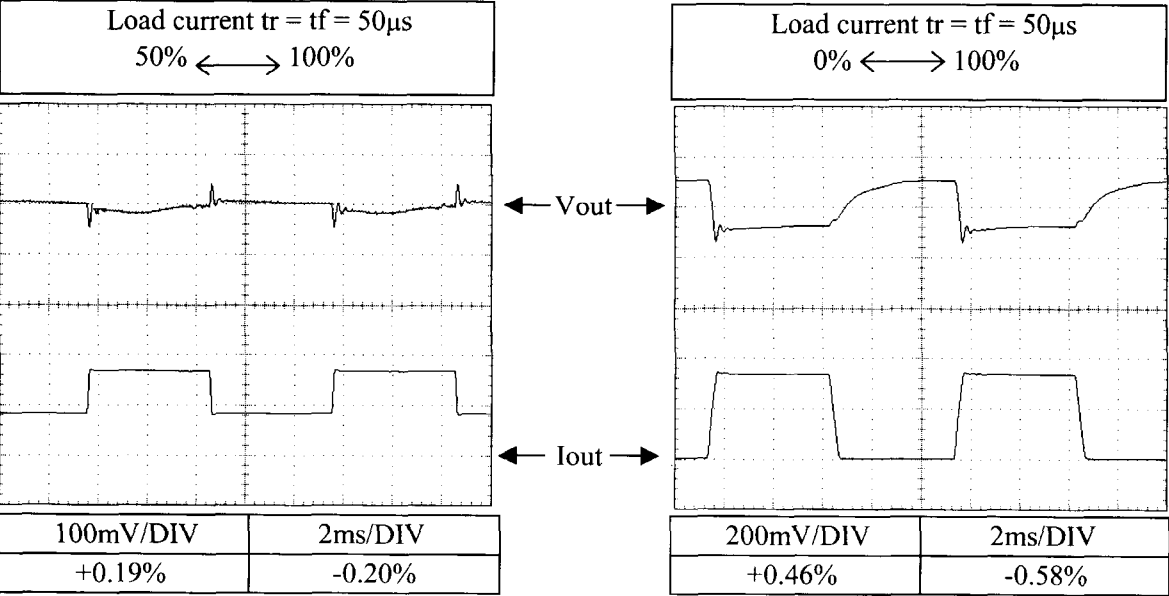

f=1kHz

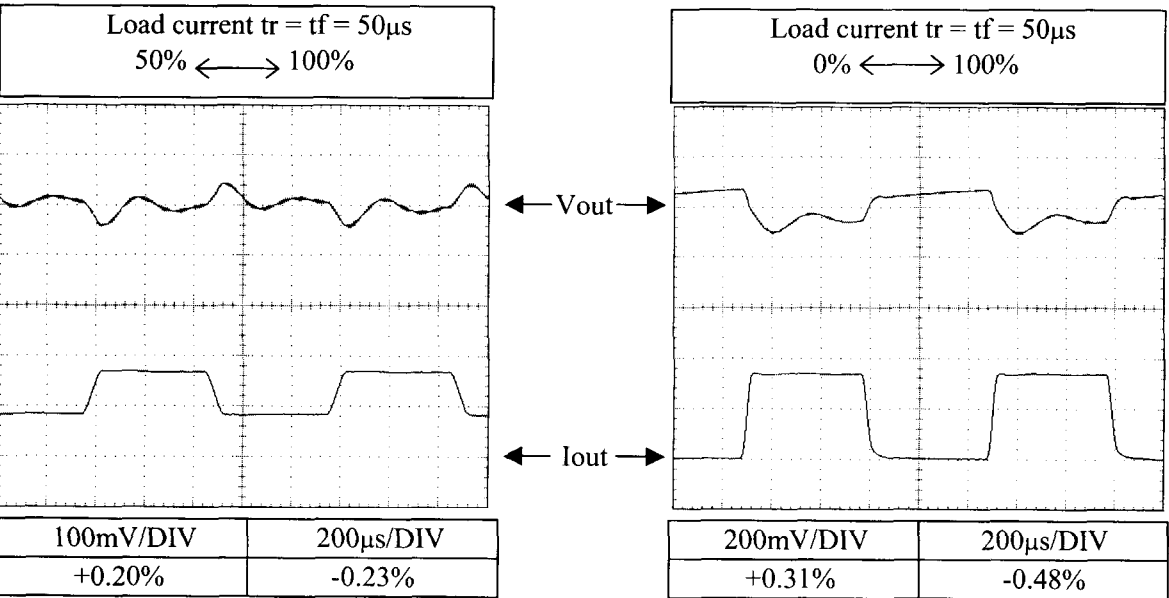


2.7 Dynamic load response characteristics


Conditions Vin : 230VAC
 Ta : 25°C

24V

f=100Hz

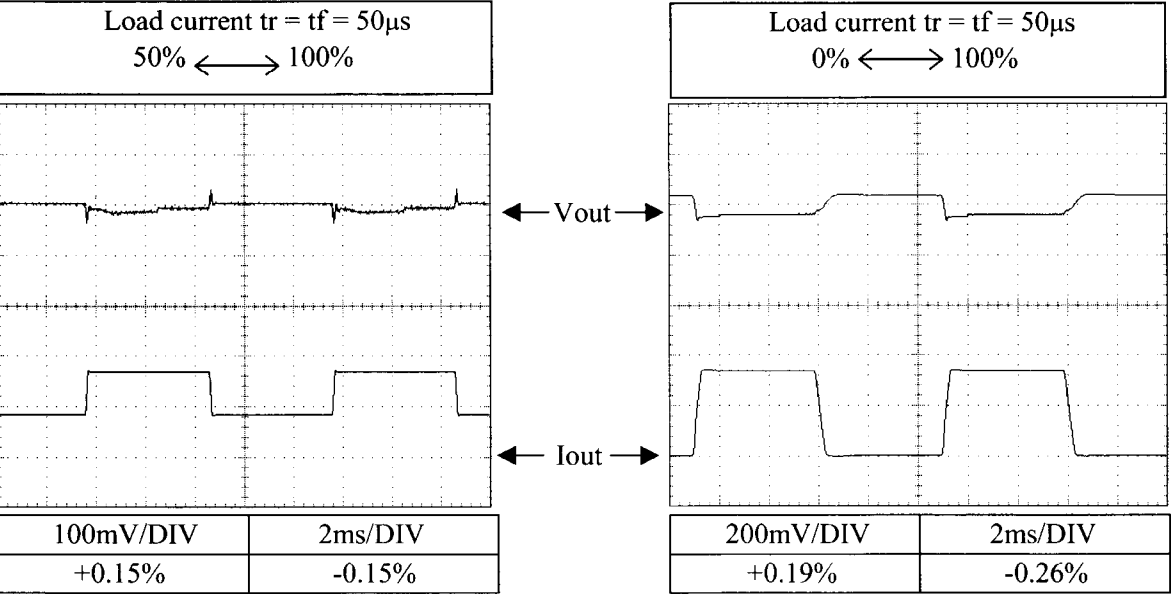

f=1kHz

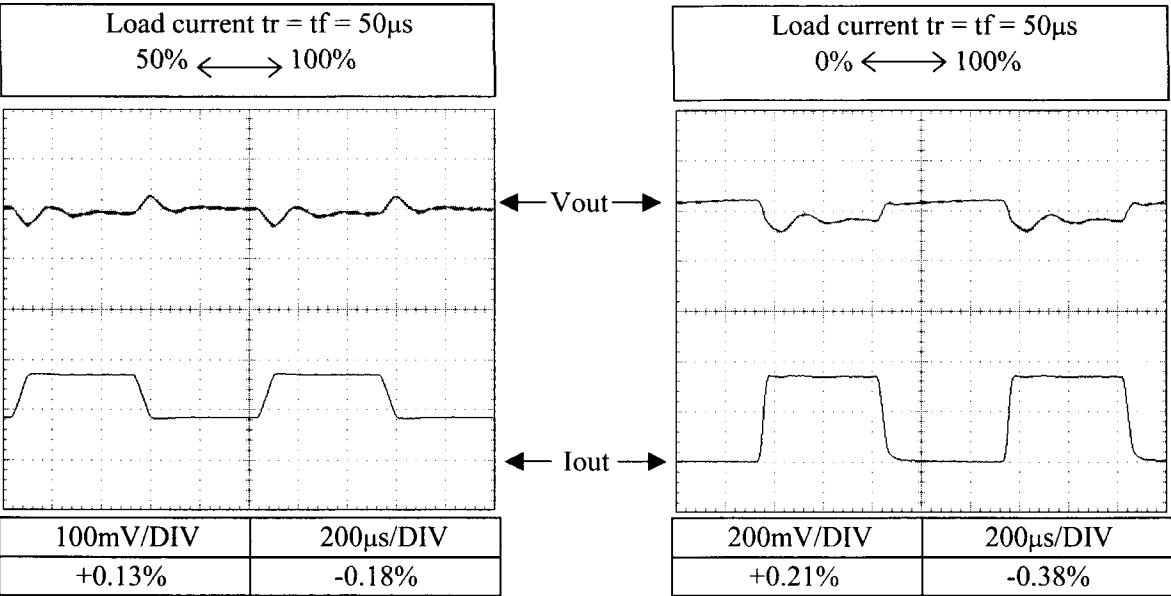


2.8 Response to brown out characteristics

Conditions Vin : 115VAC
 Iout : 100%
 Ta : 25°C


5V

A=38ms
B=39ms

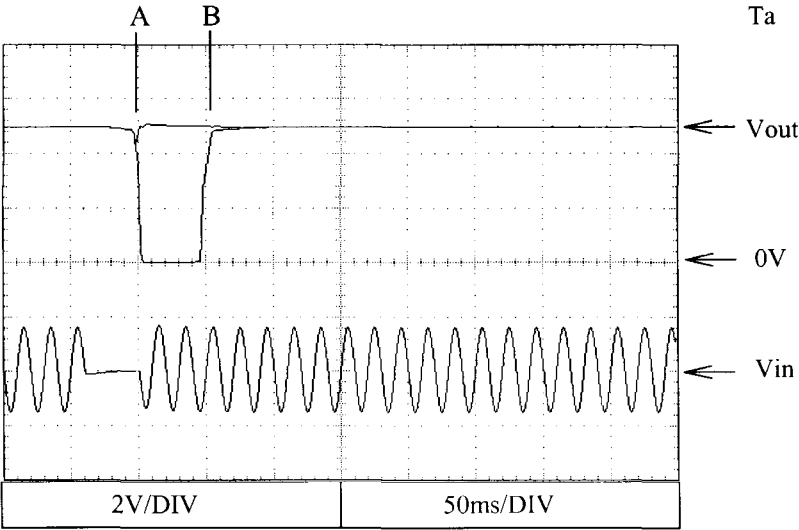


12V

A=42ms
B=43ms

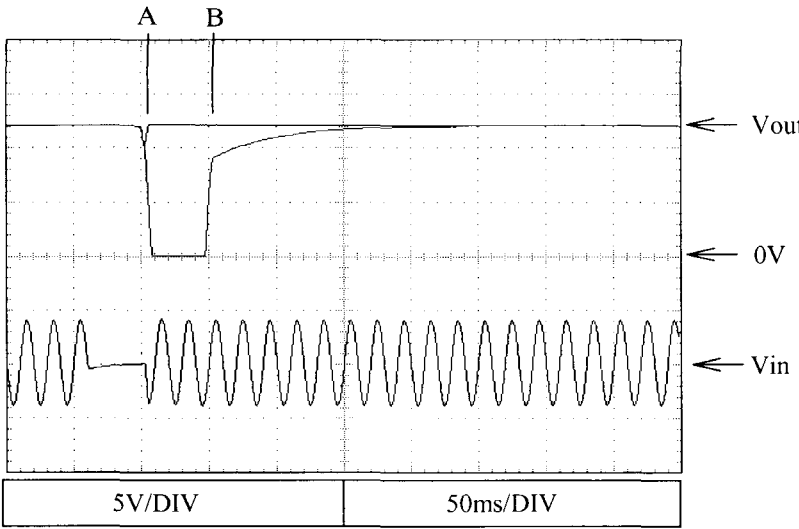




24V

A=43ms
B=44ms

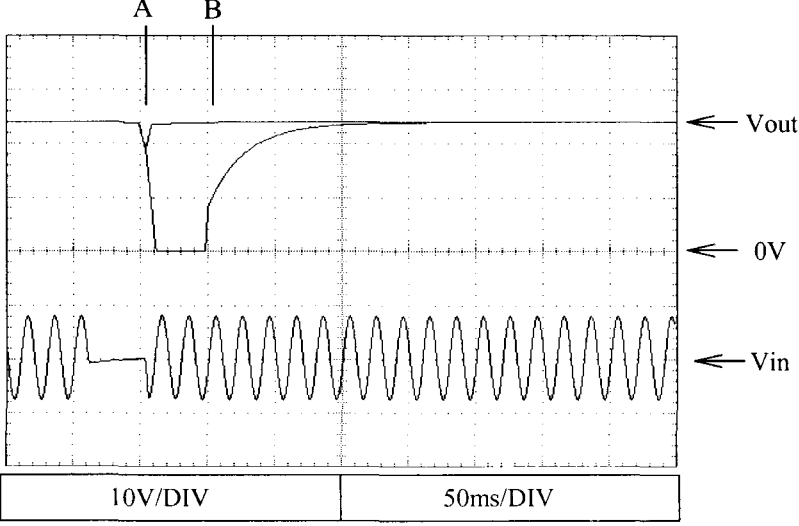

2.8 Response to brown out characteristics

Conditions Vin : 230VAC
 Iout : 100%
 Ta : 25°C

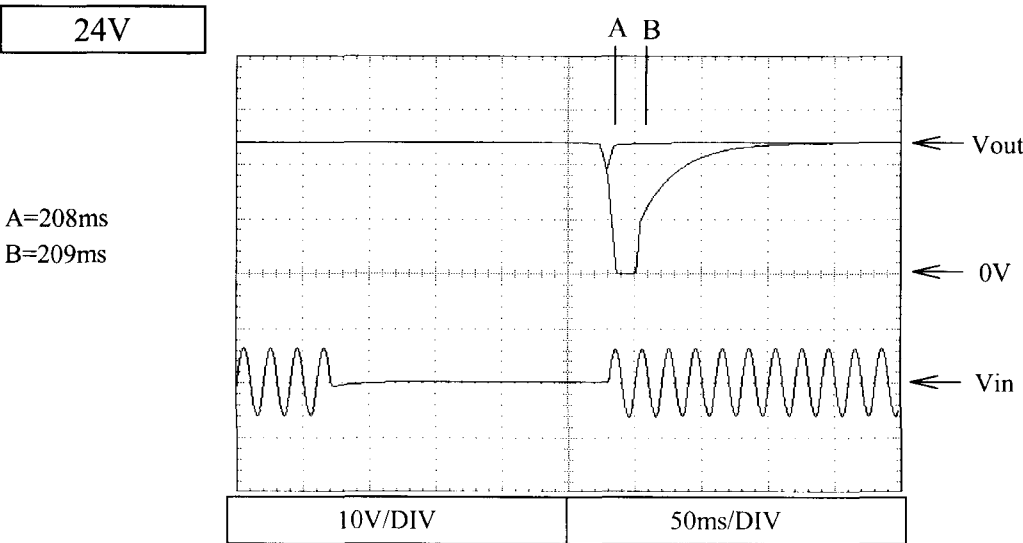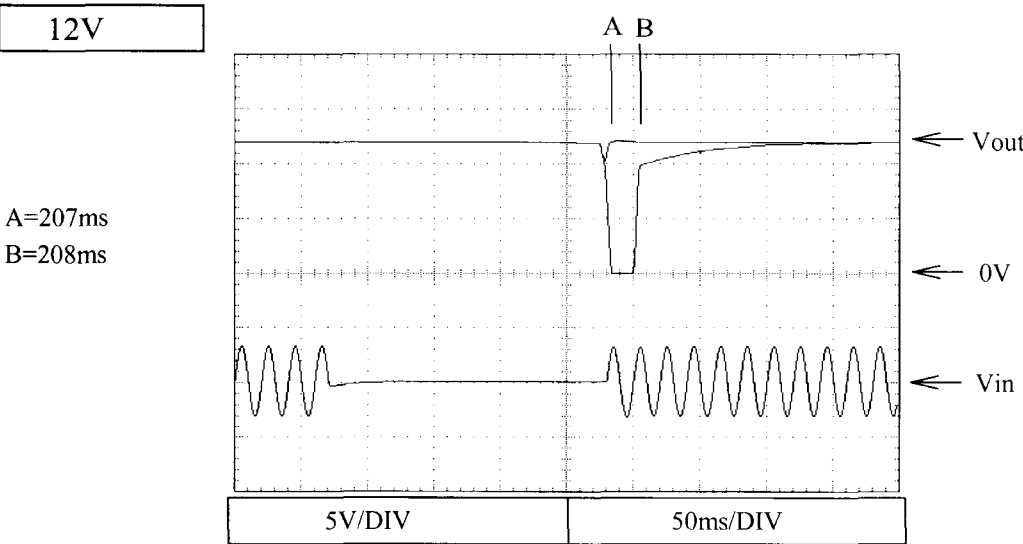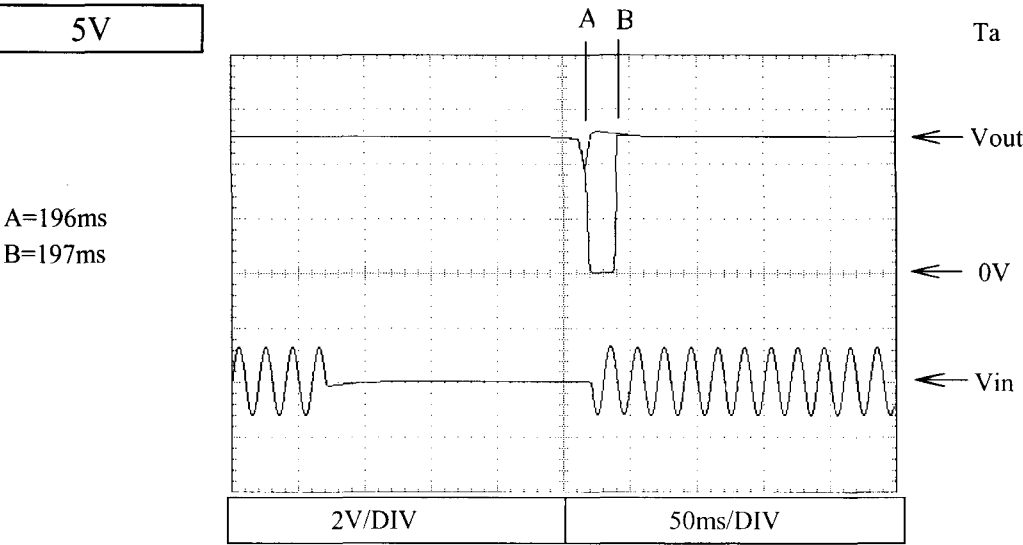


2.9 Inrush current waveform


Conditions V_{in} : 115VAC
 I_{out} : 100%
 T_a : 25°C

5V

Switch on phase angle
of input AC voltage
 $\phi = 0^\circ$

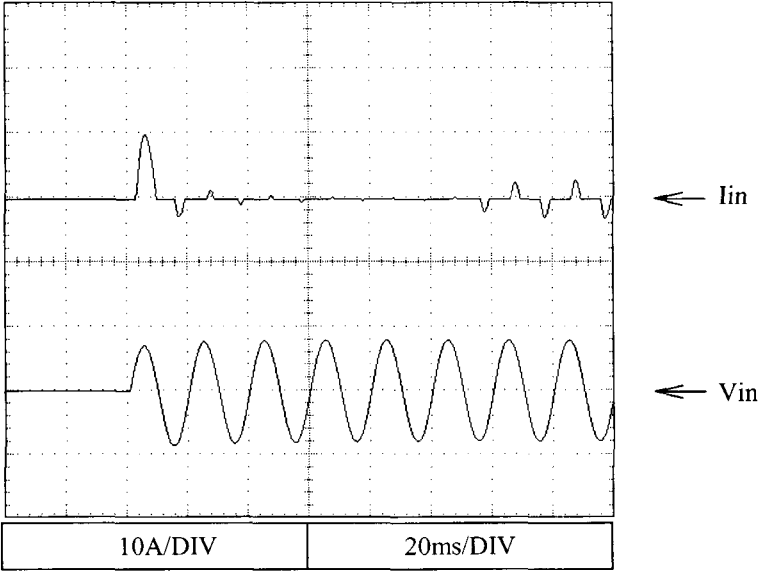

Switch on phase angle
of input AC voltage
 $\phi = 90^\circ$

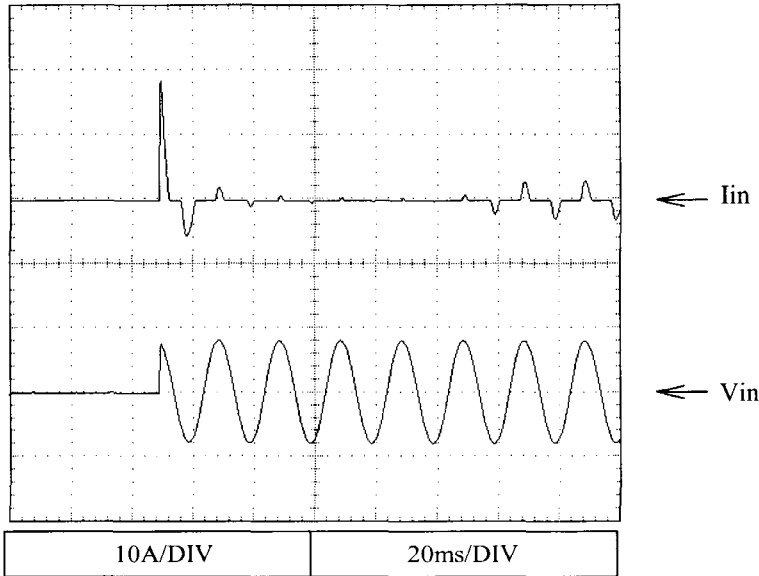


2.9 Inrush current waveform


Conditions Vin : 230VAC
 Iout : 100%
 Ta : 25°C

5V

Switch on phase angle
of input AC voltage
 $\phi = 0^\circ$



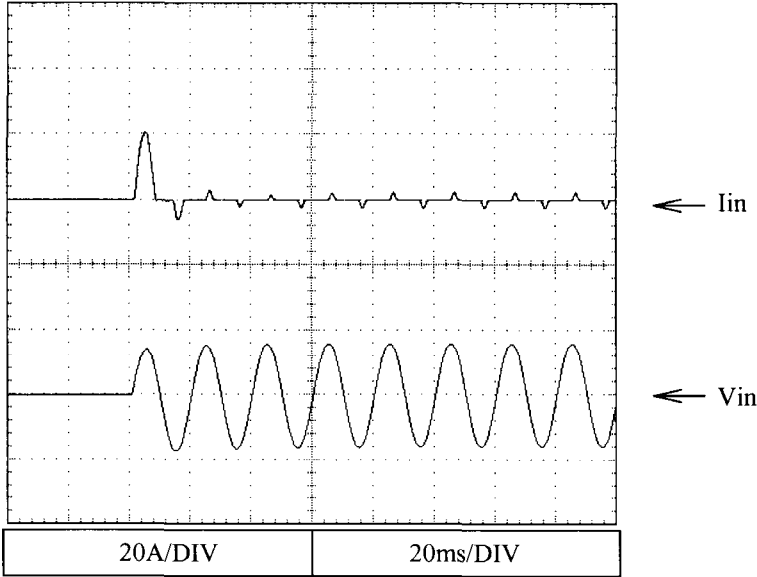


Switch on phase angle
of input AC voltage
 $\phi = 90^\circ$

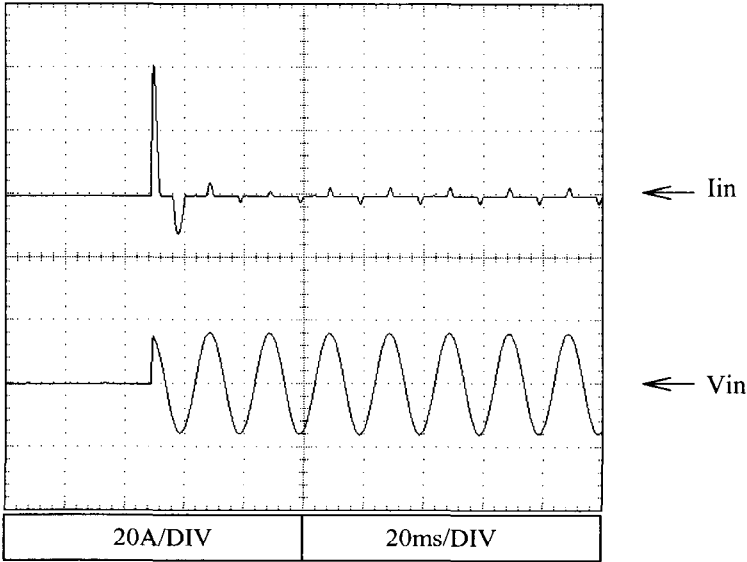

2.10 Leakage current characteristics

Conditions Iout : 0% -----
 : 100% —————
Ta : 25°C
f : 50Hz
Equipment used : MODEL 228 (Simpson)

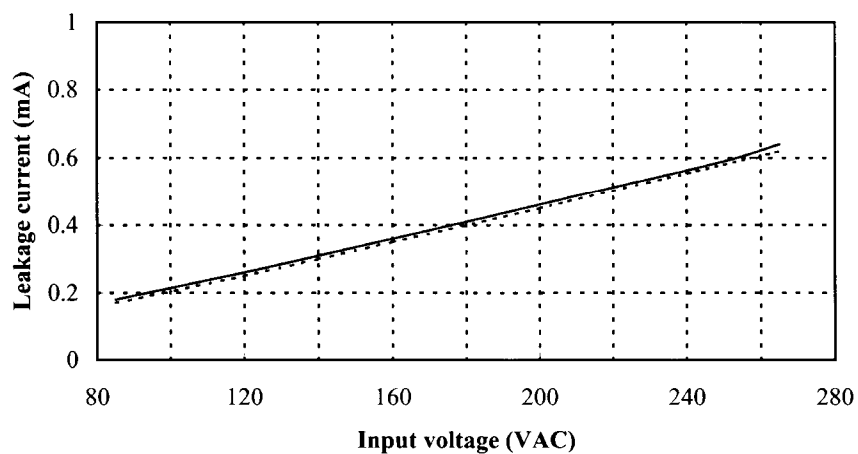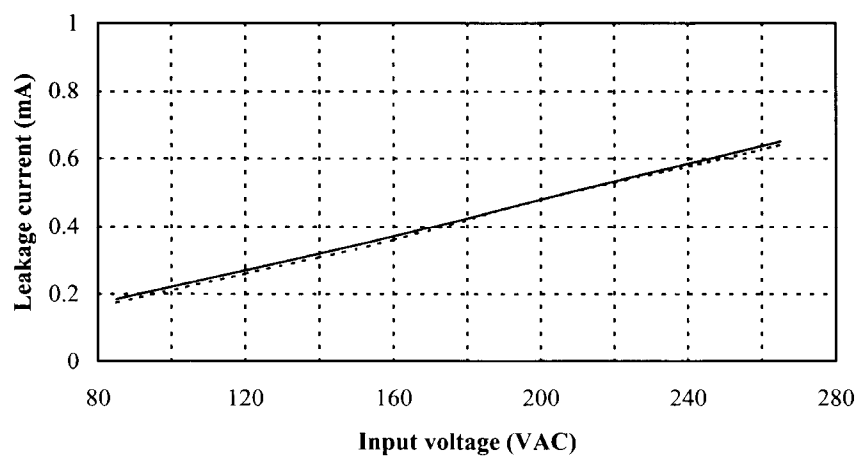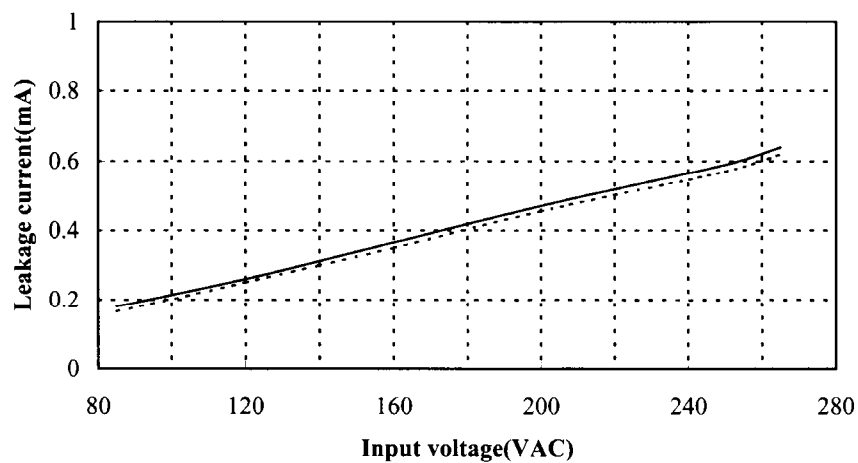
5V**12V****24V**

2.11 Output ripple and noise waveform


Conditions V_{in} : 115VAC
 I_{out} : 100%
 T_a : 25°C

NORMAL MODE


5V

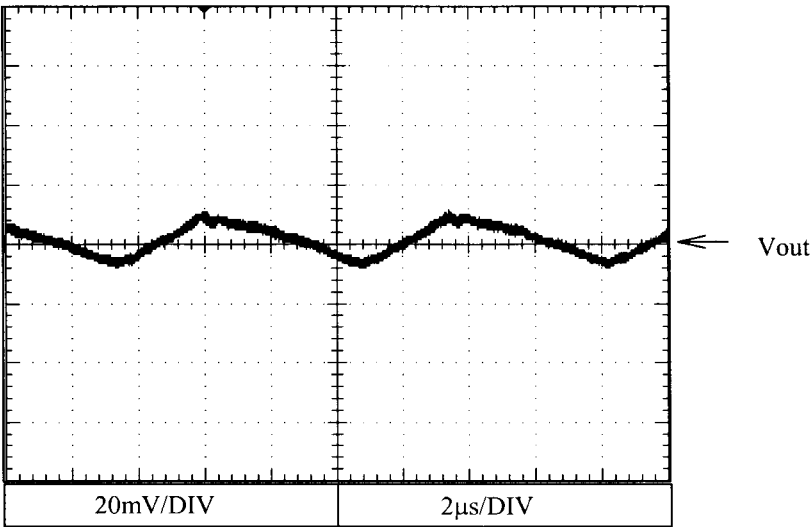

12V

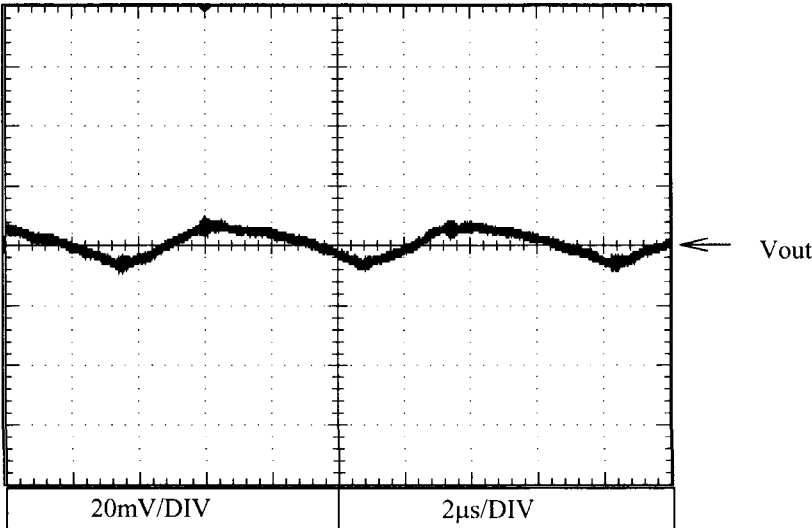

24V

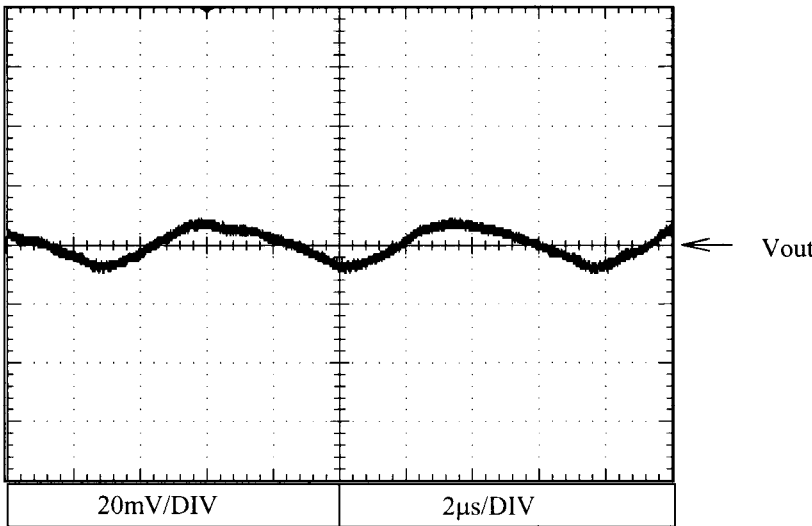


2.11 Output ripple and noise waveform


Conditions V_{in} : 115VAC
 I_{out} : 100%
 T_a : 25°C

NORMAL MODE


5V

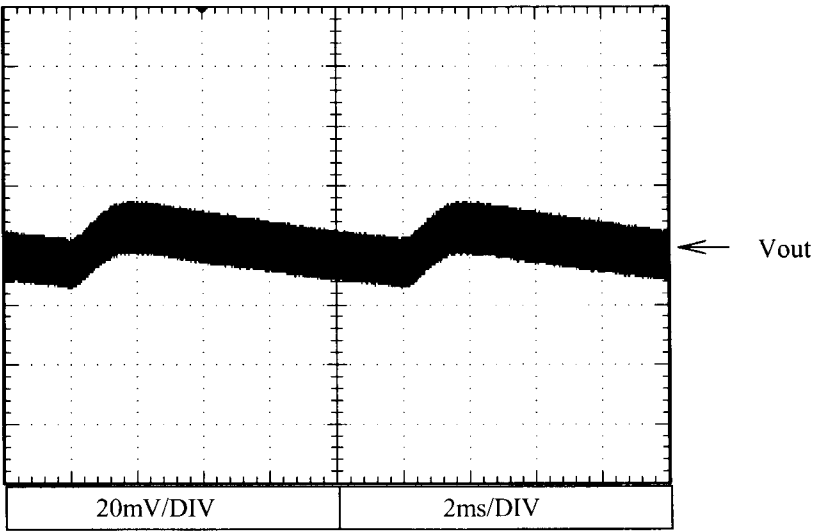

12V

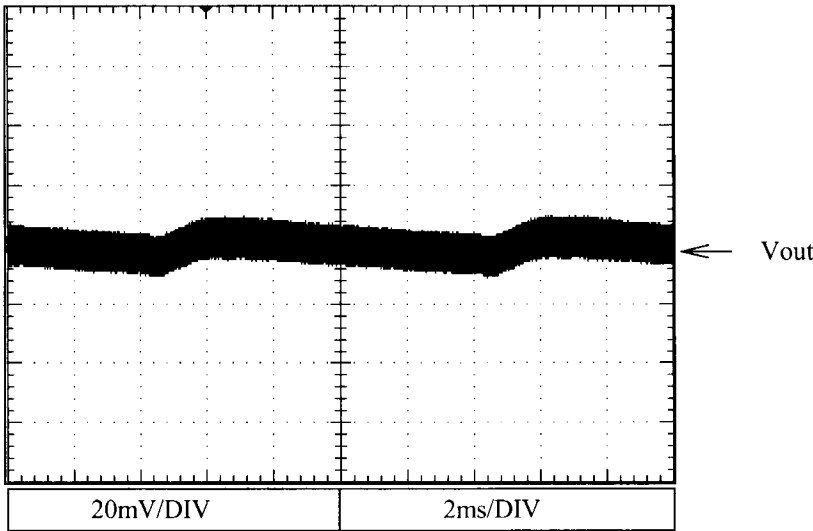

24V

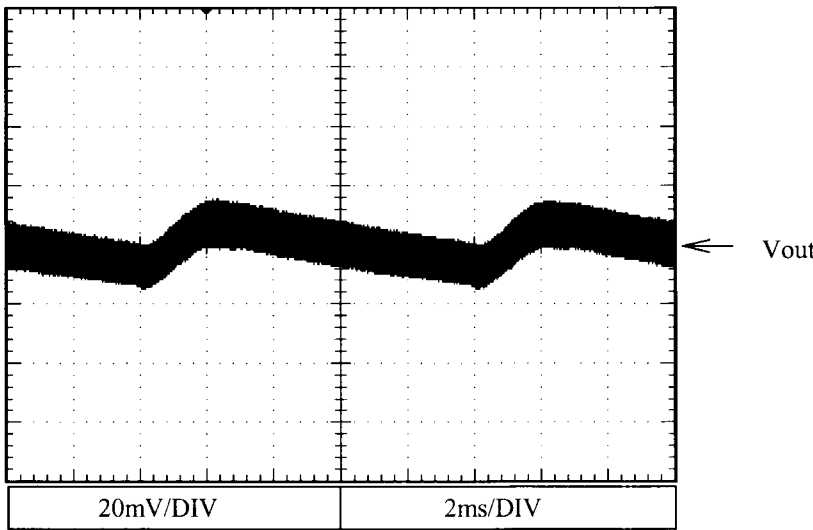


2.11 Output ripple and noise waveform


Conditions Vin : 230VAC
 Iout : 100%
 Ta : 25°C

NORMAL MODE


5V

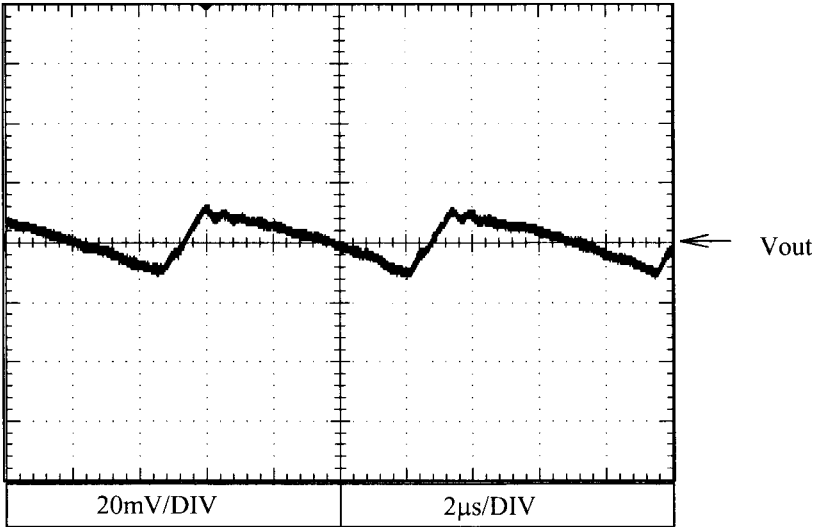

12V

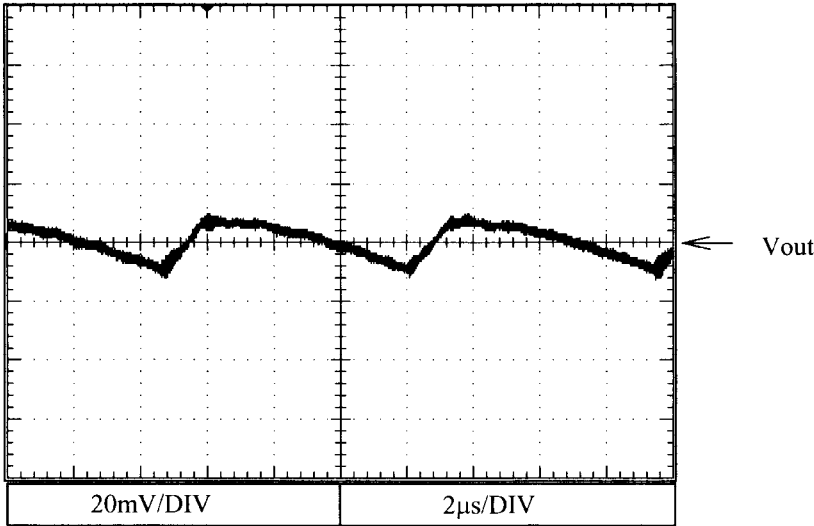

24V

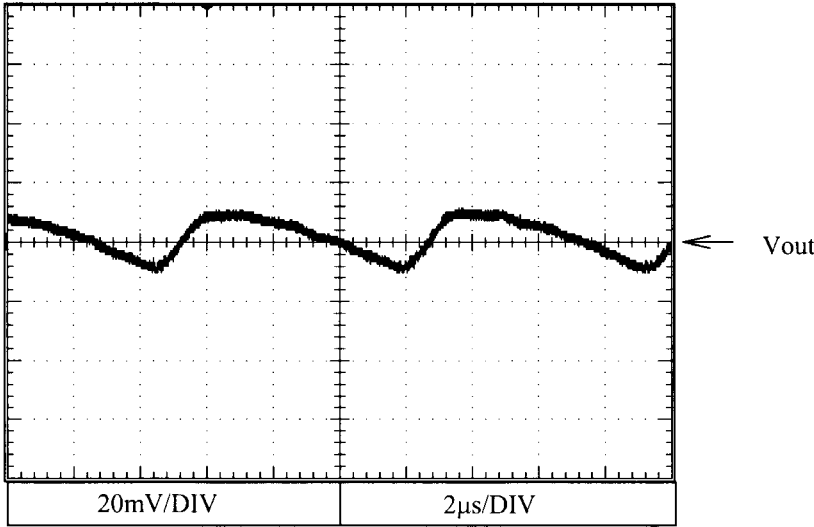


2.11 Output ripple and noise waveform


Conditions Vin : 230VAC
 Iout : 100%
 Ta : 25°C

NORMAL MODE


5V

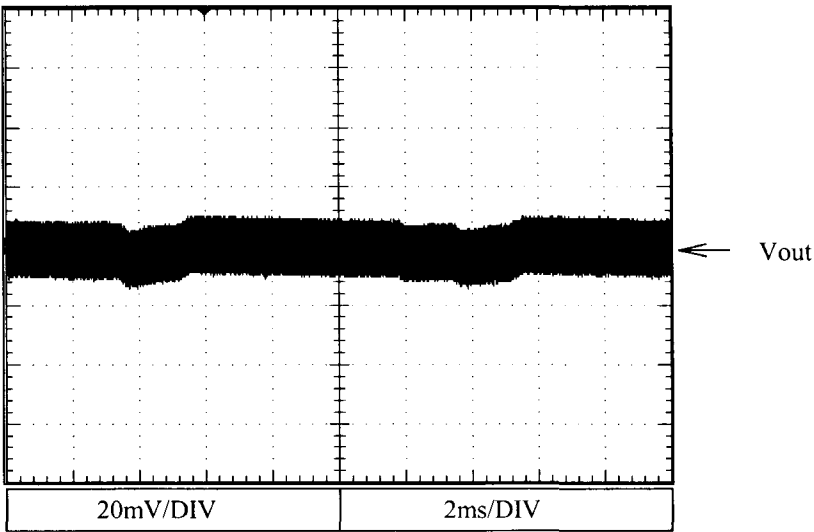

12V

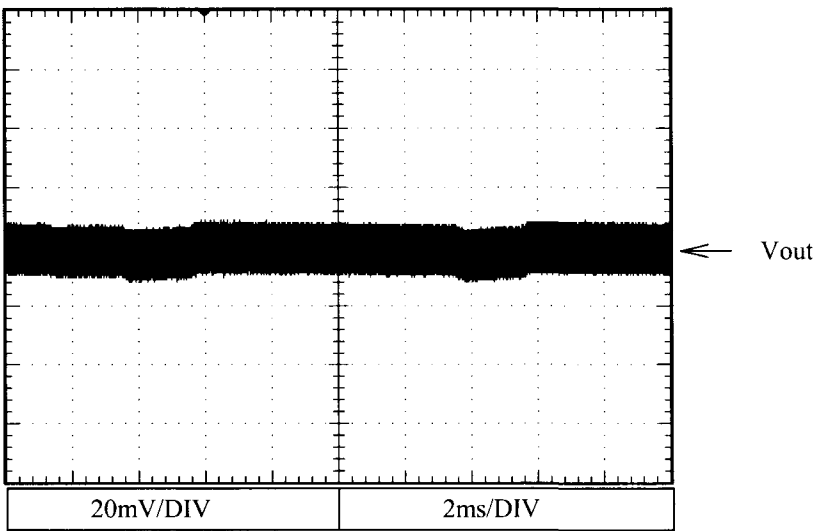

24V

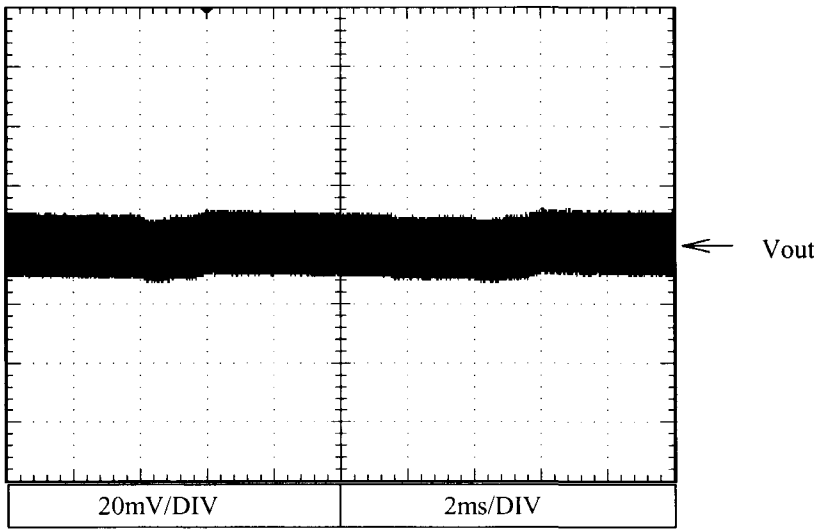

2.12 Electro-Magnetic Interference characteristics

Conducted Emission


5V

Conditions


Vin : 115VAC

Iout : 100%

Ref.	Point A (14.12MHz)	
	Data	Measure (dBuV)
QP	Limit (dBuV)	49.5
AV	Limit (dBuV)	40.6

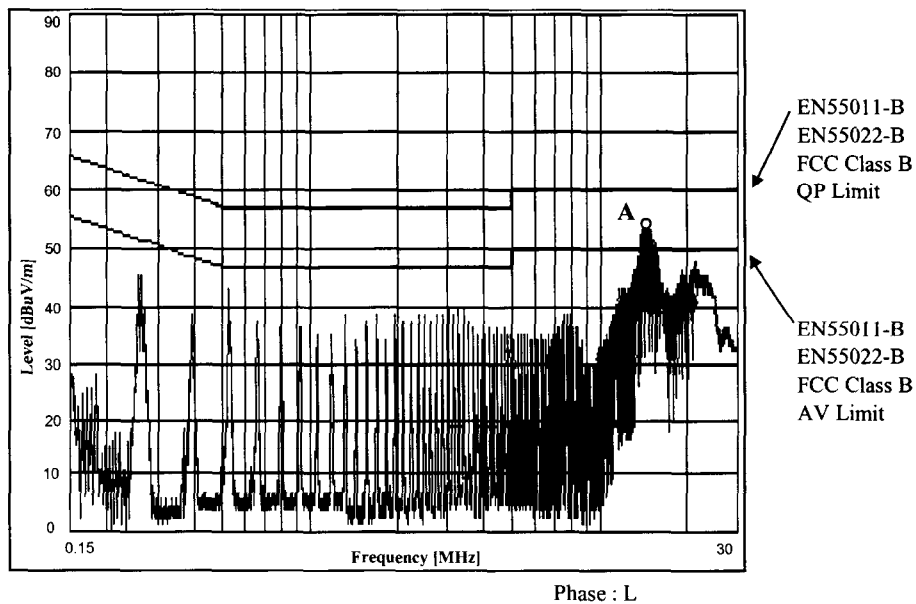

Ref.	Point B (14.65MHz)	
	Data	Measure (dBuV)
QP	Limit (dBuV)	51.5
AV	Limit (dBuV)	38.2

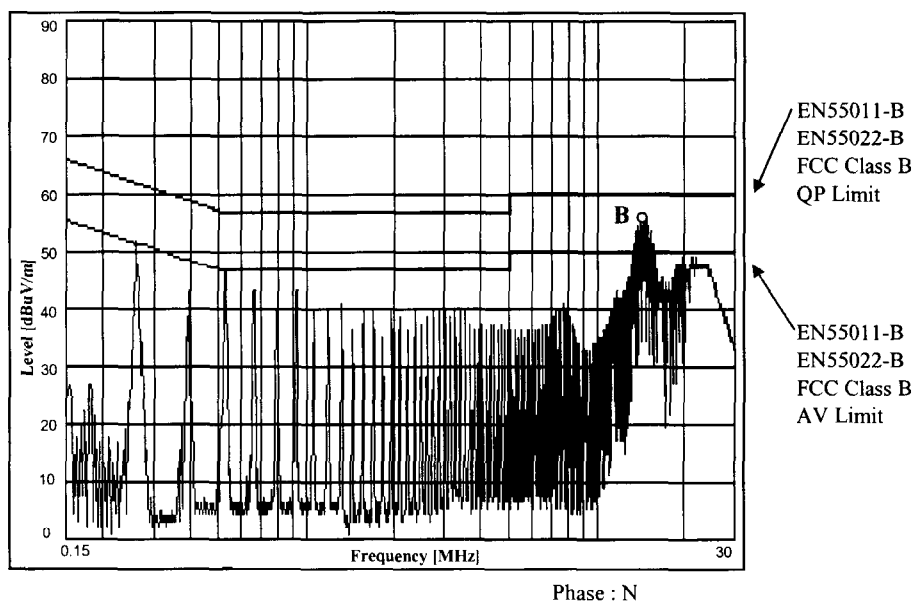


2.12 Electro-Magnetic Interference characteristics

Conducted Emission


5V

Conditions
Vin : 230VAC
Iout : 100%

Ref.	Point A (15.30MHz)	
	Limit (dBuV)	Measure (dBuV)
QP	60.0	51.8
AV	50.0	41.6

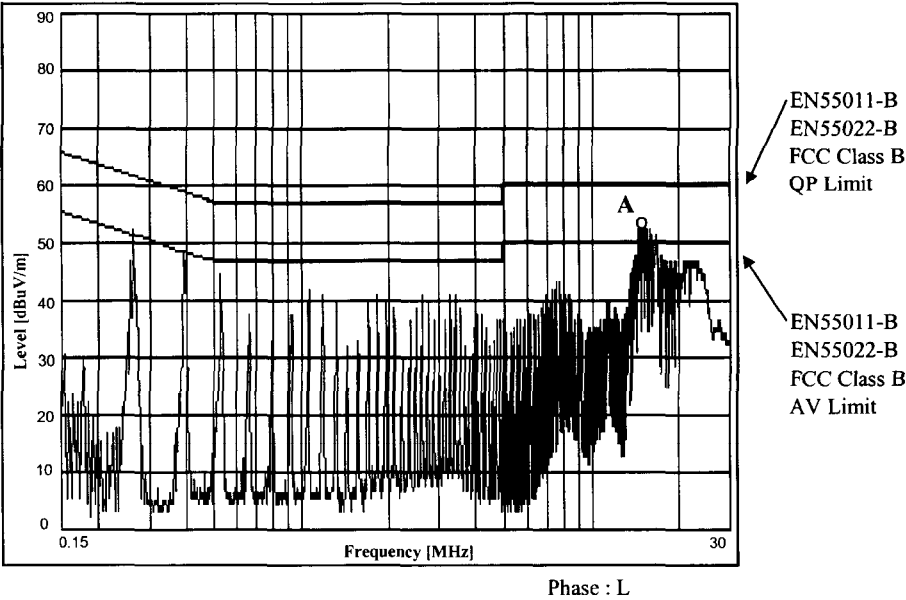

Ref.	Point B (0.39MHz)	
	Limit (dBuV)	Measure (dBuV)
QP	58.0	50.8
AV	58.0	43.2

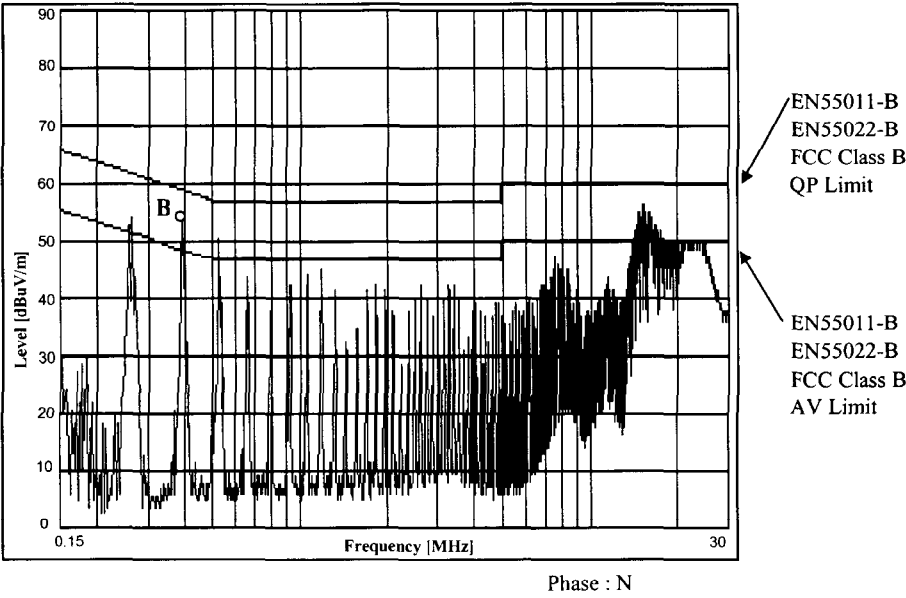


2.12 Electro-Magnetic Interference characteristics

Conducted Emission

12V


Conditions
Vin : 115VAC
Iout : 100%

Ref.	Point A (14.27MHz)	
	Data	Measure (dBuV)
QP	Limit (dBuV)	60.0
AV	Limit (dBuV)	50.0

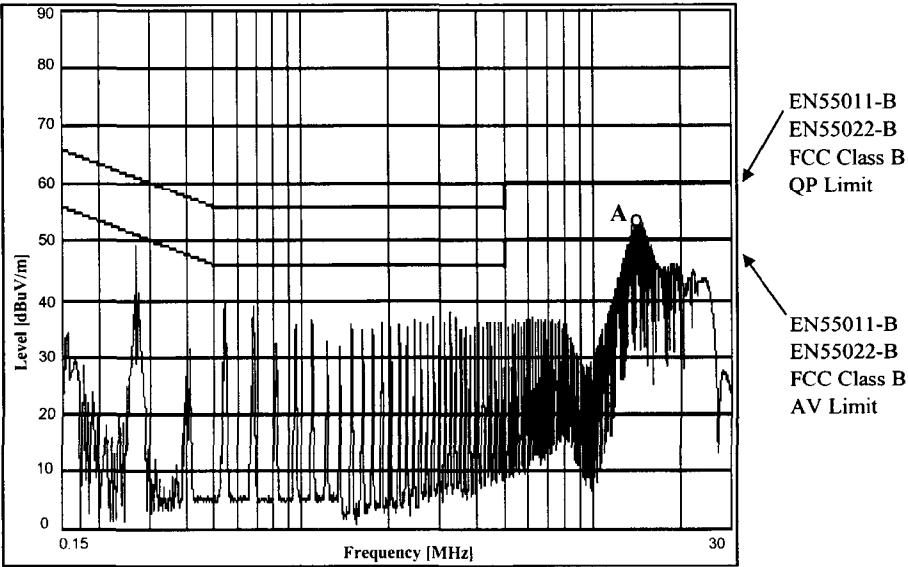

Phase : L

Ref.	Point B (14.40MHz)	
	Data	Measure (dBuV)
QP	Limit (dBuV)	60.0
AV	Limit (dBuV)	50.0

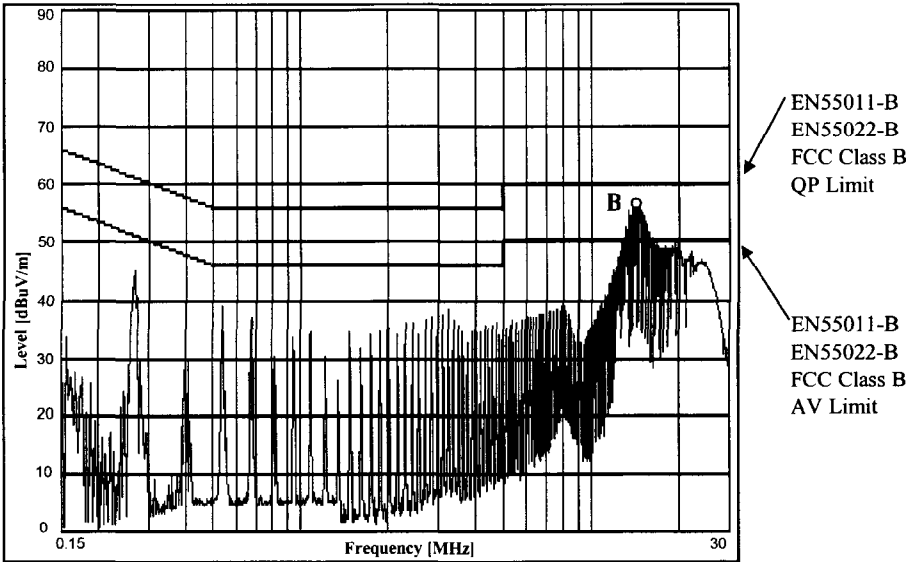

Phase : N


2.12 Electro-Magnetic Interference characteristics

Conducted Emission


12V

Conditions
Vin : 230VAC
Iout : 100%

Ref.	Point A (15.33MHz)	
	Data	Measure (dBuV)
QP	Limit (dBuV)	60.0
AV	Limit (dBuV)	50.0

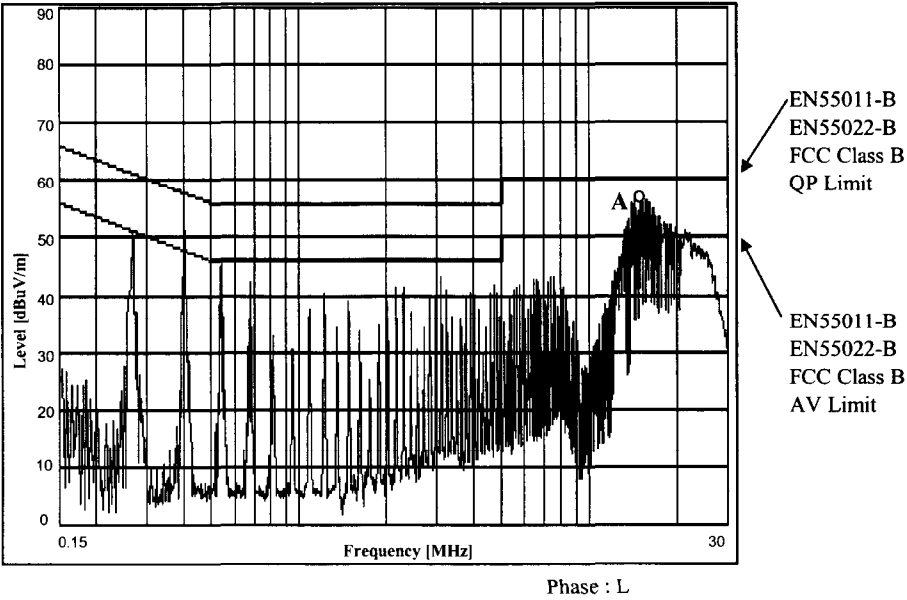

Ref.	Point B (15.19MHz)	
	Data	Measure (dBuV)
QP	Limit (dBuV)	60.0
AV	Limit (dBuV)	50.0

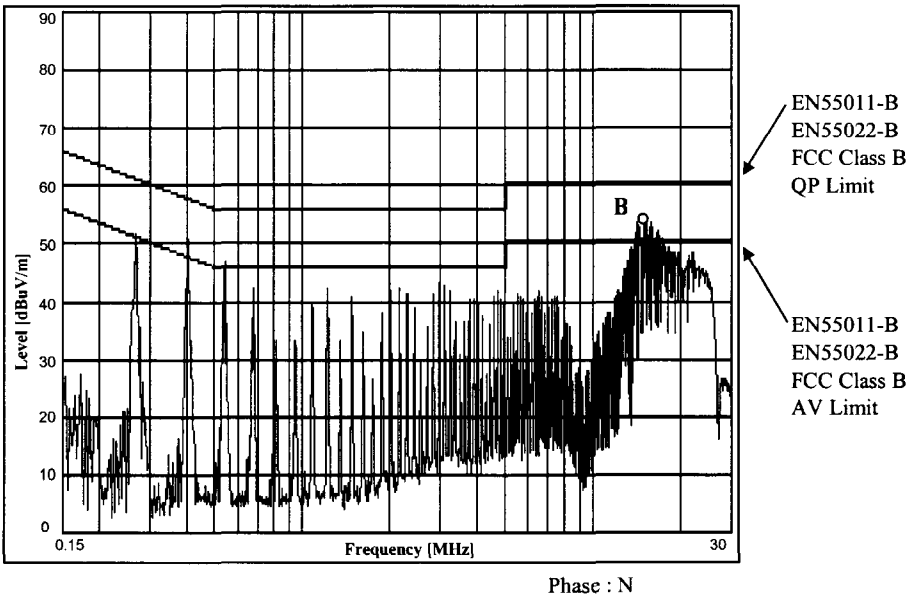

2.12 Electro-Magnetic Interference characteristics

Conducted Emission


24V

Conditions


Vin : 115VAC

Iout : 100%

Ref.	Point A (16.26MHz)	
	Data	Limit (dBuV)
QP	60.0	38.0
AV	50.0	27.8

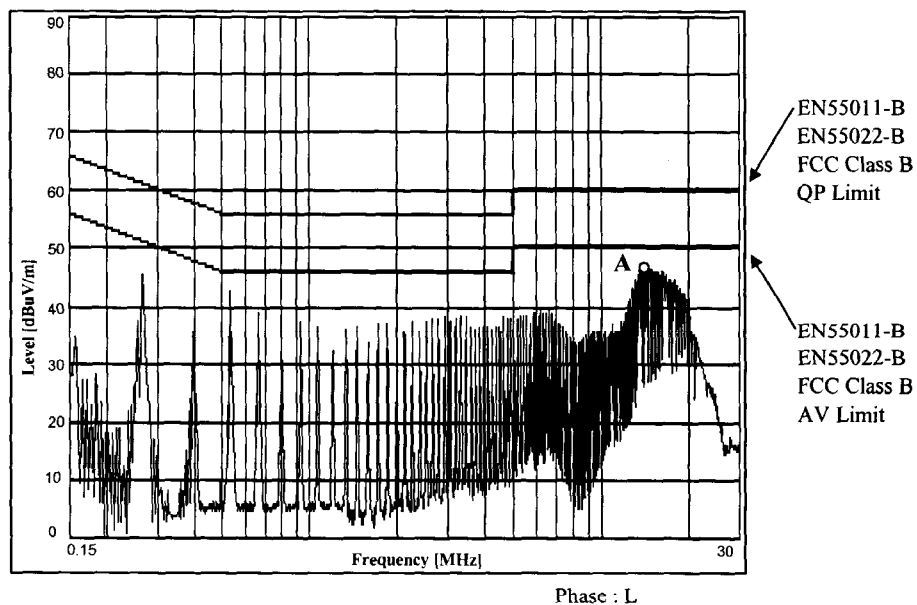

Ref.	Point B (14.41MHz)	
	Data	Limit (dBuV)
QP	60.0	45.8
AV	50.0	37.4

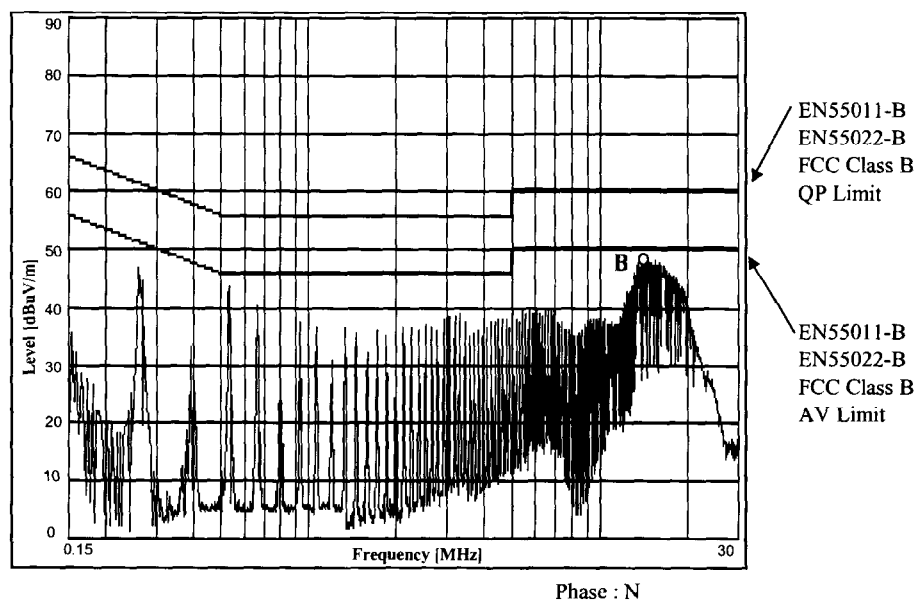

2.12 Electro-Magnetic Interference characteristics

Conducted Emission


24V

Conditions

Vin : 230VAC


Iout : 100%

Ref.	Point A (0.39MHz)	
	Limit (dBuV)	Measure (dBuV)
QP	58.0	48.9
AV	48.0	38.2

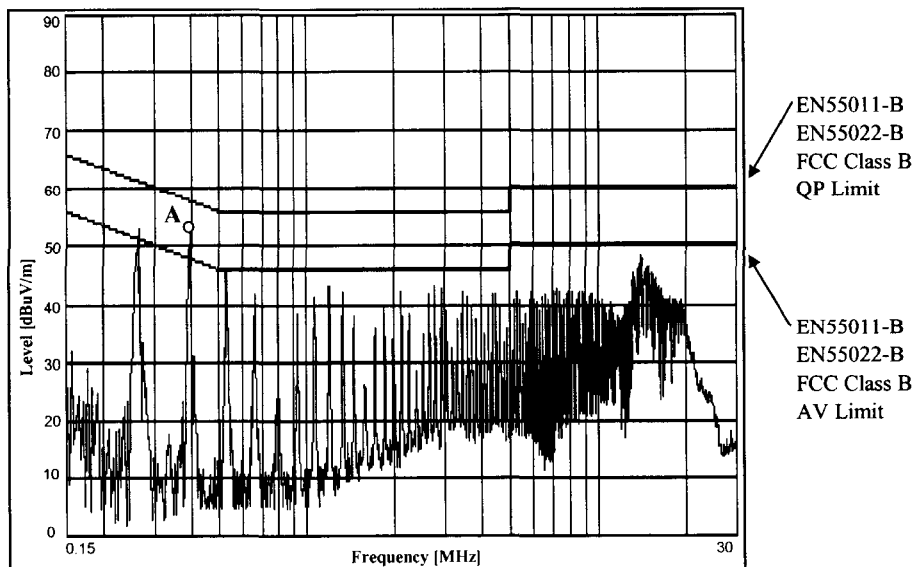

Phase : L

Ref.	Point B (0.39MHz)	
	Limit (dBuV)	Measure (dBuV)
QP	58.0	46.9
AV	48.0	33.2

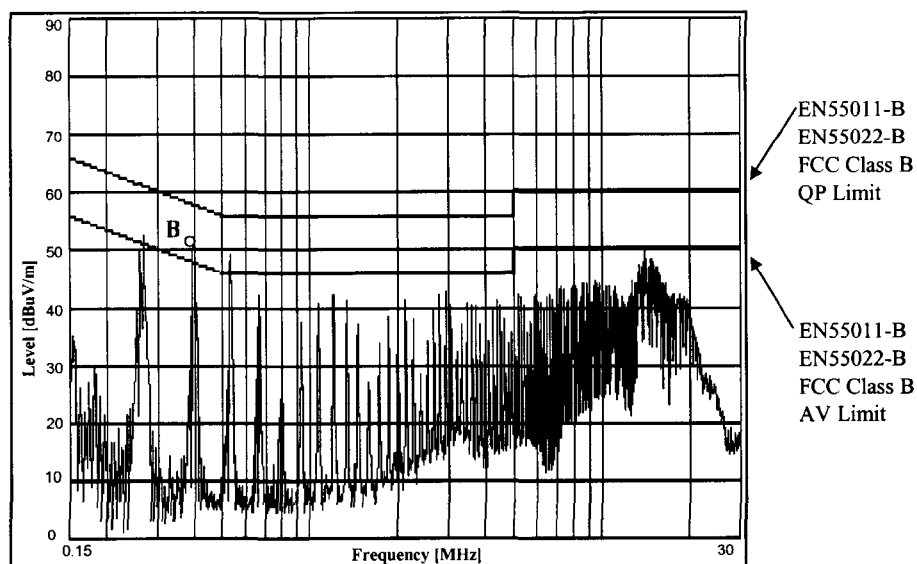

Phase : N


2.12 Electro-Magnetic Interference characteristics

Radiated Emission

5V


HORIZONTAL:

Point A (286.1MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	33.2

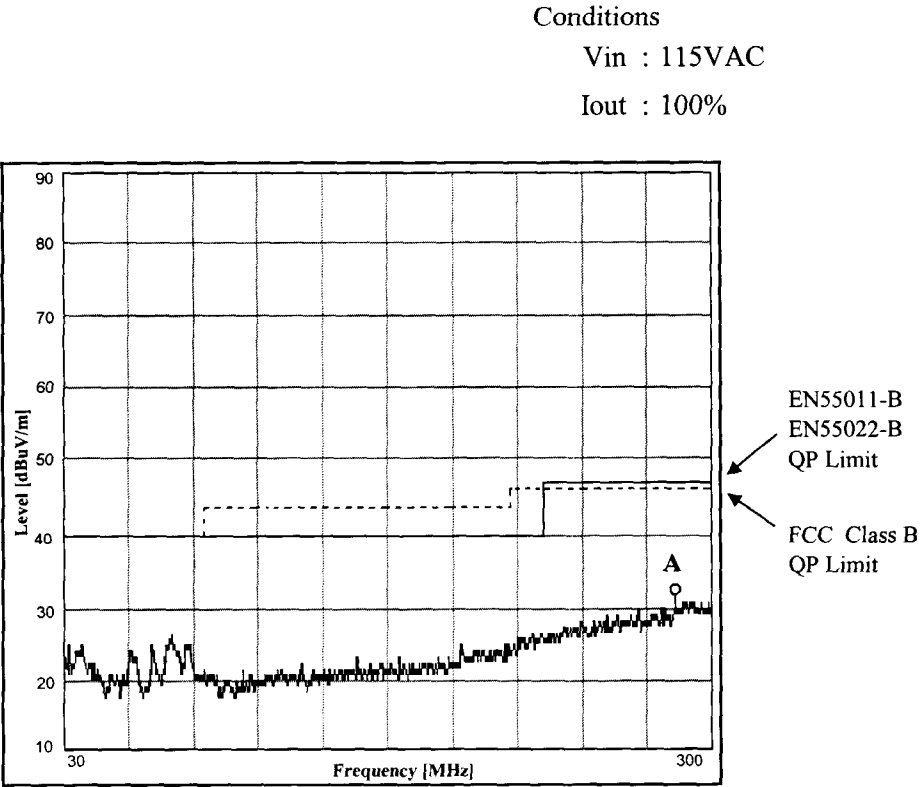

VERTICAL:

Point B (293.0MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	34.5

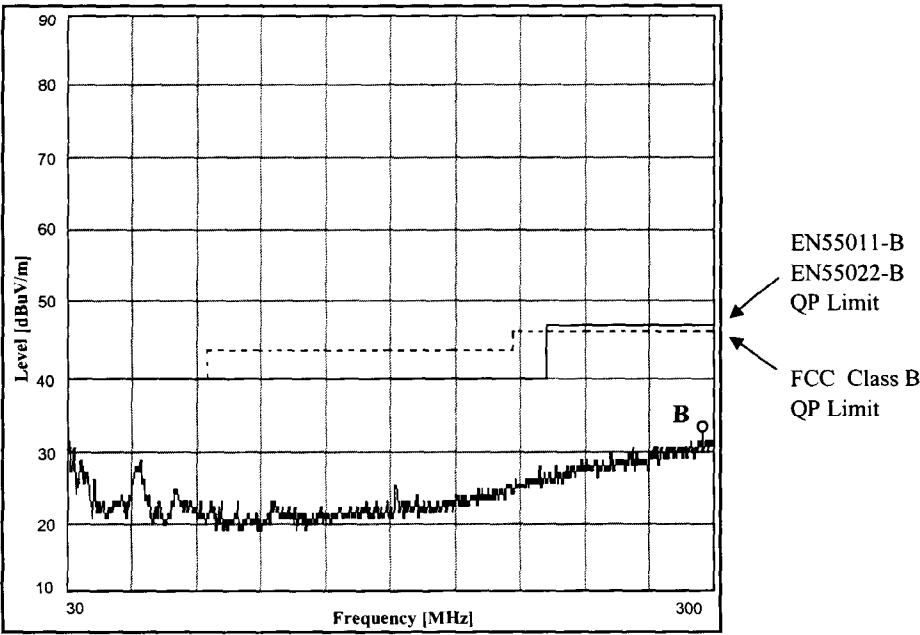

2.12 Electro-Magnetic Interference characteristics

Radiated Emission


5V

HORIZONTAL:

Conditions


 V_{in} : 230VAC I_{out} : 100%

Point A (77.3MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
40.0	30.6

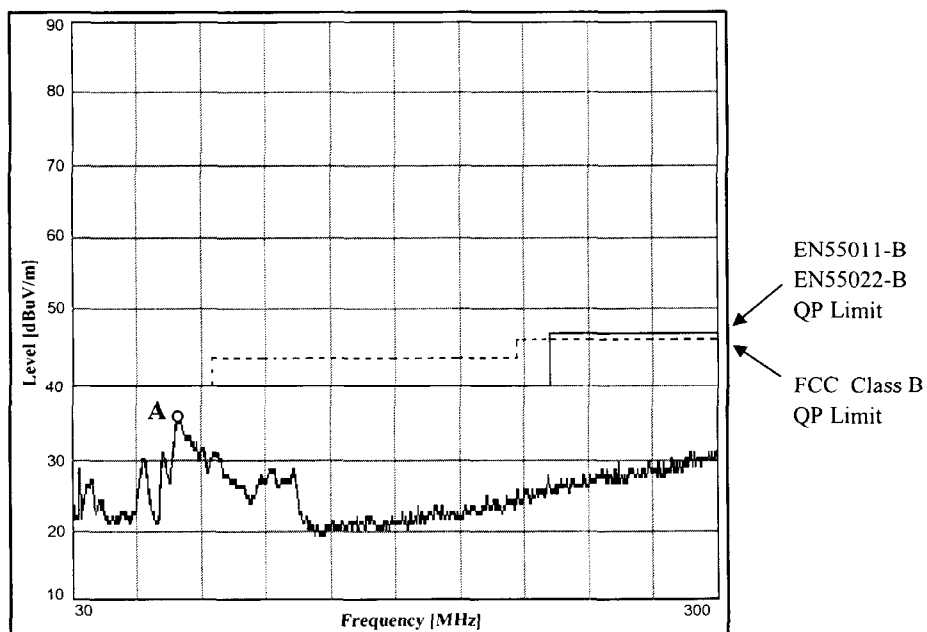

VERTICAL:

Point B (60.1MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
40.0	30.1

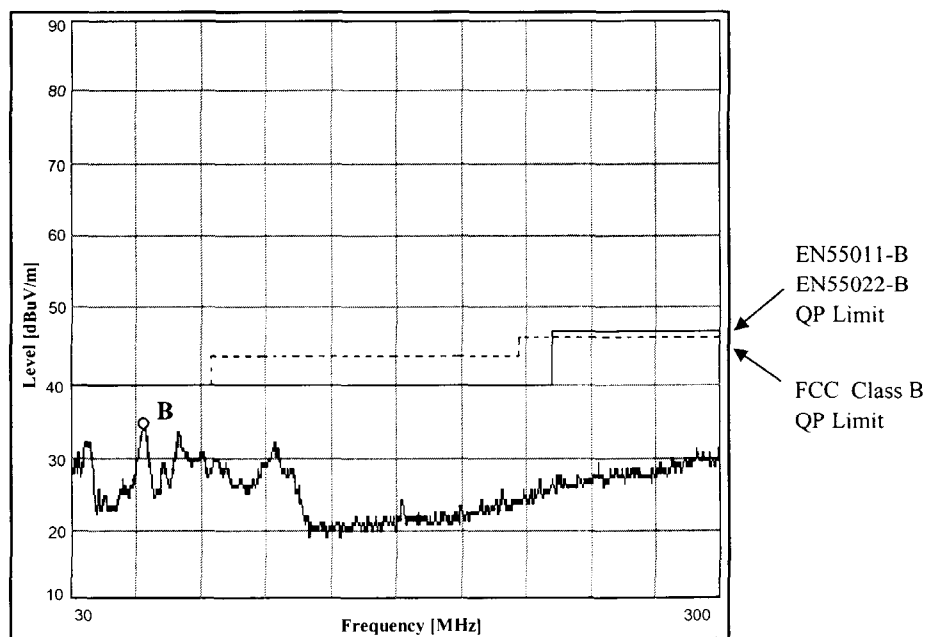

2.12 Electro-Magnetic Interference characteristics


Radiated Emission

12V

Conditions
Vin : 115VAC
Iout : 100%


HORIZONTAL:

Point A (296.5MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	25.6

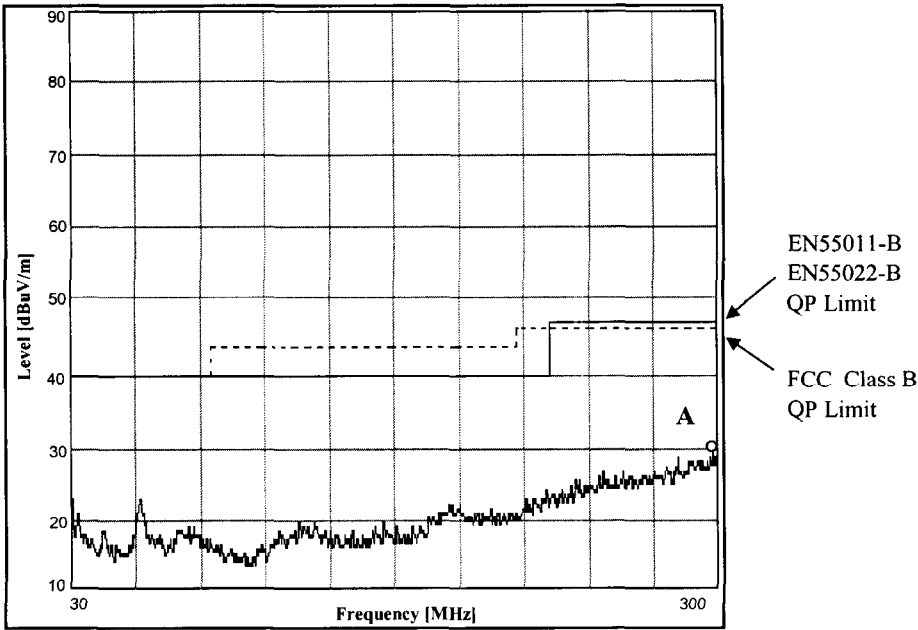

VERTICAL:

Point B (30.0MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
40.0	30.3

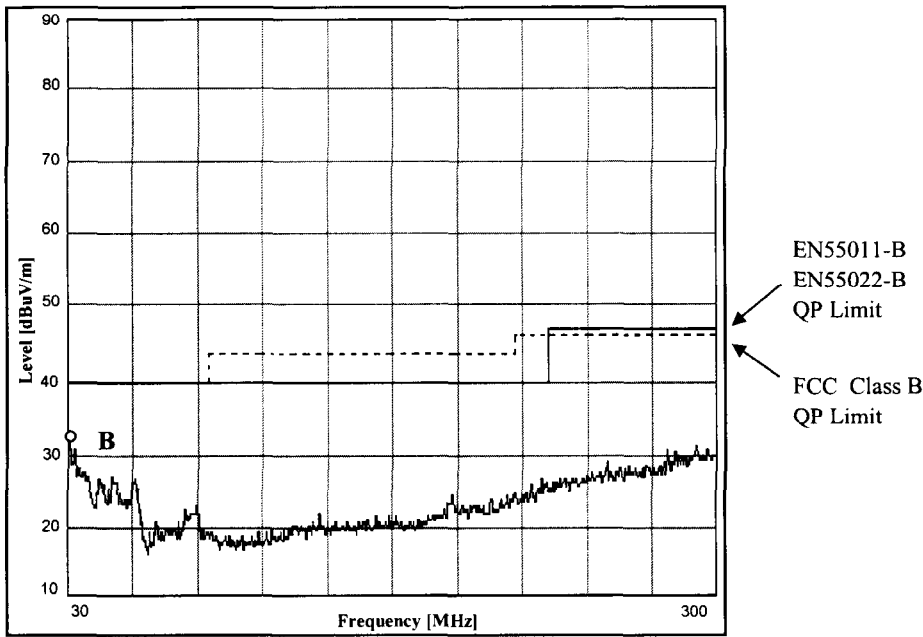

2.12 Electro-Magnetic Interference characteristics


Radiated Emission

12V

Conditions
Vin : 230VAC
Iout : 100%


HORIZONTAL:

Point A (300.0MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	30.4

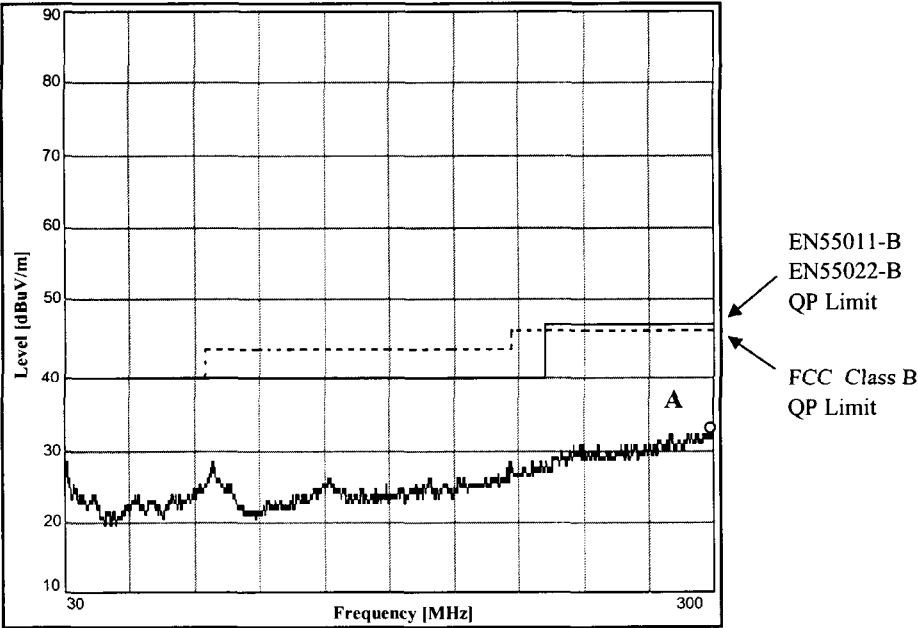

VERTICAL:

Point B (30.0MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
40.0	31.6

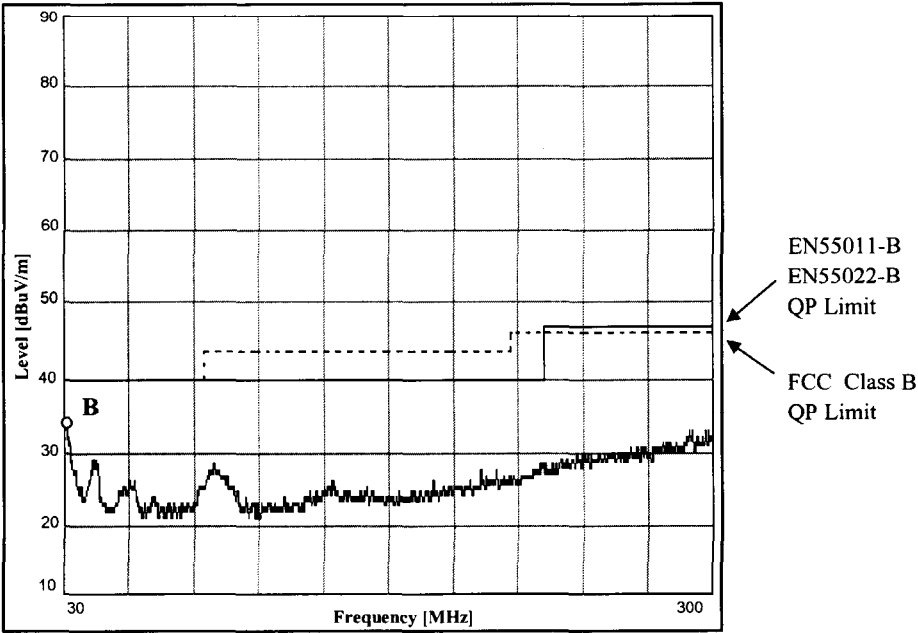

2.12 Electro-Magnetic Interference characteristics


Radiated Emission

24V

Conditions
Vin : 115VAC
Iout : 100%

HORIZONTAL:


Point A (296.2MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	27.8

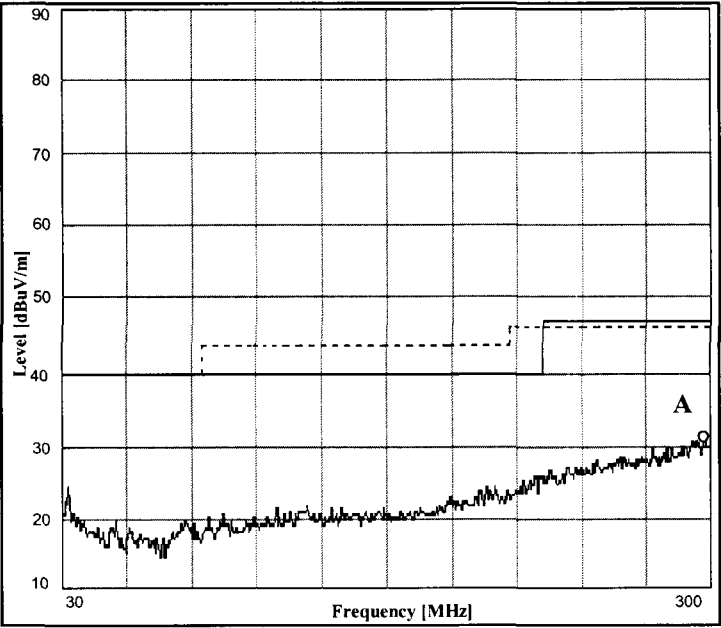

EN55011-B
EN55022-B
QP Limit
FCC Class B
QP Limit

VERTICAL:

Point B (298.3MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	27.5

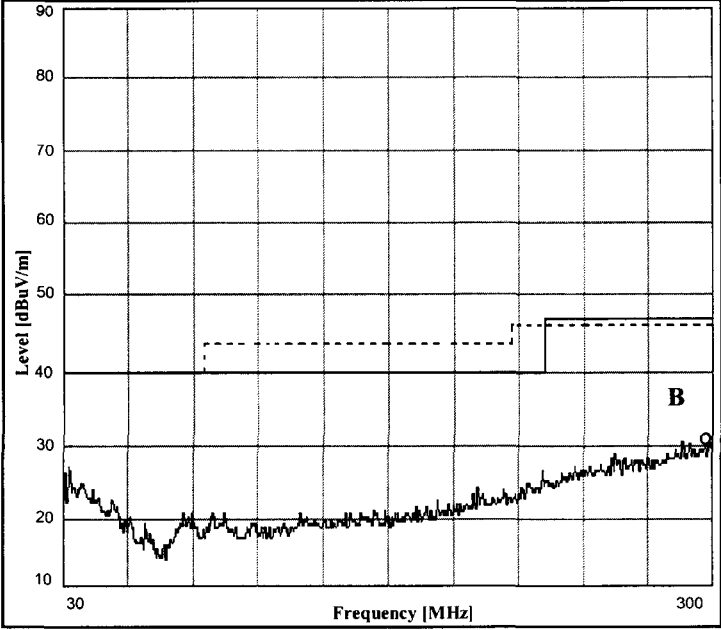

EN55011-B
EN55022-B
QP Limit
FCC Class B
QP Limit

2.12 Electro-Magnetic Interference characteristics


Radiated Emission

Conditions
Vin : 230VAC
Iout : 100%

24V

HORIZONTAL:

Point A (196.2MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
46.0	27.8

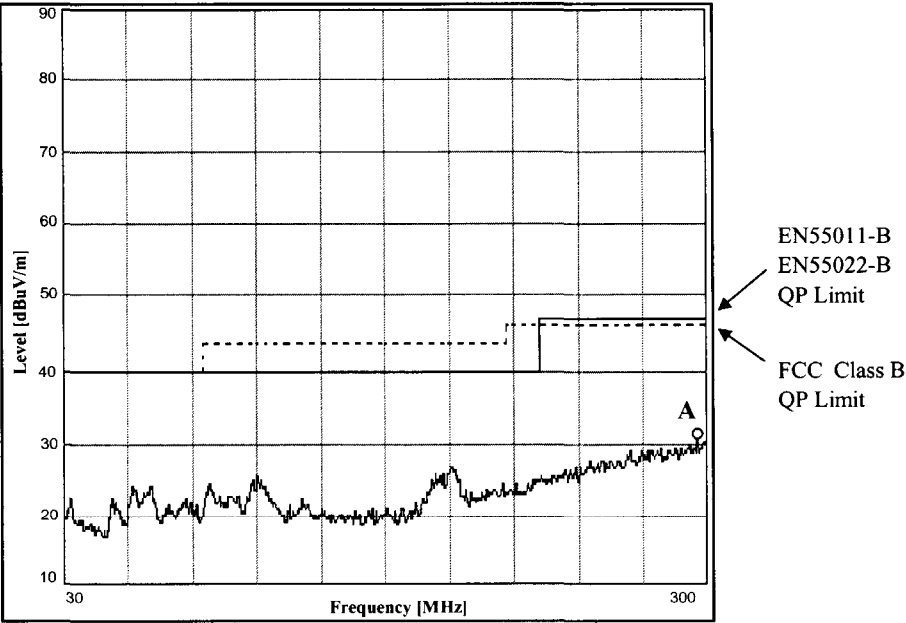

VERTICAL:

Point B (50.2MHz)	
Limit (dBuV/m)	Measure (dBuV/m)
40.0	29.6

