

CUS30M/M

(/M : Molex connector option)

CA851-01-01/M-A


SPECIFICATIONS

ITEMS	MODEL	CUS30M -12/M	CUS30M -24/M	CUS30M -48/M
1 Nominal Output Voltage	V	12	24	48
2 Maximum Output Current	A	2.5	1.25	0.63
3 Maximum Output Power	W	30	30	30.24
4 Efficiency (Typ.)	115/230 VAC (*1)	% 87 / 88	% 88 / 90	% 88 / 90
5 Active Average Efficiency related to Erp	115/230 VAC (*1)	%	87 / 87	% 88 / 89
6 No Load Power Consumption	W	< 0.3 , Ta=25°C, Nominal Input and Output Voltage		
7 Input Voltage Range	(*)2)	85 - 265 VAC (47-63Hz)		
8 Input Current (Typ.)	115/230 VAC (*1)	A	0.6 / 0.4	
9 Inrush Current (Typ.)	(*)1)(*3)	A	30 / 60 at Cold Start	
10 Output Voltage Range	-	Fixed (shipment condition : ±2.5%)		
11 Maximum Ripple & Noise(Ta>0°C/Ta<=0°C)(*1)(*4)(*5)	mV	120 / 200	150 / 200	200 / 300
12 Maximum Ripple & Noise (0%~35% Load) (*4)(*5)	mV	280	280	480
13 Maximum Line Regulation (*4)(*6)	mV	48	96	192
14 Maximum Load Regulation (*4)(*7)	mV	120	192	384
15 Temperature Coefficient (*4)	-	Less than 0.02% / °C		
16 Over Current Protection (*8)	-	>105% of Maximum Output Current . Class 2 limited power source		
17 Over Voltage Protection (*9)	-	Above 115% ~ , shutdown		
18 Hold-up time (Typ.)	115/230 VAC(*1)	ms	20 / 100	
19 Earth Leakage Current (*10)	-	0.25mA max @265VAC,60Hz		
20 Patient Leakage Current	-	100uA max @265VAC , 60Hz , Input to Output		
21 Parallel Operation	-	No		
22 Series Operation	-	Possible		
23 Operating Temperature (*11)	-	-20°C ~ +70°C		
24 Operating Humidity	-	10 - 90%RH (No condensing)		
25 Storage Temperature	-	-40°C ~ +85°C		
26 Storage Humidity	-	10 - 90%RH (No condensing)		
27 Operating Altitude	-	5000m, derating 5°C/1000m above 3000m		
28 Isolation Class / Class of Protection	-	Class I (L,N,FG) or ClassII (L,N)		
29 Cooling	-	Convection Cooling		
30 Withstand Voltage	-	Input-Output : 4kVAC (20mA) 2xMOPP, Input-FG : 2kVAC (20mA) 1xMOPP, Output-FG : 1.5kVAC (20mA) 1xMOPP		
31 Isolation Resistance	-	More than 100MΩ at 25°C,70%RH, Output - FG : 500VDC		
32 Vibration	-	At no operating, 10-500Hz (Sweep for 1min.) Maximum 19.6m/s ² X,Y,Z 1 hour each		
33 Shock	-	Less than 196m/s ²		
34 Safety	-	Approved by IEC/EN62368-1, UL62368-1, CSA62368-1 Approved by IEC/EN60601-1, ES60601-1, CSA-C22.2 No.60601-1		
35 Pollution	-	Degree 2, material group 3		
36 EMI (*1)	-	Designed to meet EN55011-B, EN55032-B, FCC-Class B Designed to meet IEC61000-4-2 (Level 4,3), IEC61000-4-3 (Level 3)		
37 Immunity	-	IEC61000-4-4 (Level 3), IEC61000-4-5 (Level 3,4), IEC61000-4-6 (Level 3), IEC61000-4-8 (Level 4), IEC60601-1-2 Ed.4, Criteria A		
38 Line voltage dip	-	SEMI47 (Input Voltage: 200VAC~240VAC)		
	-	Designed to meet IEC61000-4-11 (Class 3) : Criteria A : 200VAC~240VAC Criteria B : 100VAC~120VAC		
	-	Designed to meet IEC61000-4-11 (Class 2) : IEC60601-1-2 Ed.4 Criteria A : Input Voltage above 120VAC or output below 70% of Maximum Output Current Criteria B : Input Voltage below 120VAC and Output Current more than 70%		
39 Weight (Typ.)	g	65		
40 Size (L x W x H)	inch	3 x 2 x 0.95 (Refer to Outline Drawing)		

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At 115VAC/230VAC, Ta=25°C, nominal output voltage and maximum output power
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required input voltage range will be 100 ~ 240VAC (50-60Hz).
Output derating required when Vin is less than 115VAC, refer output derating curve for details.
- *3. Not applicable for the in-rush current to noise filter for less than 0.2ms.
- *4. Please refer to Fig. A for measurement of Vo, line and load regulation and ripple voltage
- *5. Ripple & noise are measured at 20MHz by using a 150mm twisted pair of load wires terminated with a 0.1μF and 47μF capacitor.
- *6. 85~265VAC, constant load.
- *7. No load - full load, constant input voltage.
- *8. Hiccup with automatic recovery. Avoid operating at over load or short circuit condition
- *9. OVP circuit shut down the output, manual reset (Re power on) to get output voltage.
- *10. Measured by the each measuring method of UL, CSA, and EN (at 60Hz), Ta=25°C.
- *11. Refer to output derating curve for details of output derating versus input voltage, ambient temperature and mounting method
 - Load (%) is percent of maximum output power or maximum output current. Do not exceed its derating of maximum Load
 - Maximum load start up at -30°C is possible. However, it may not fulfill all the specifications

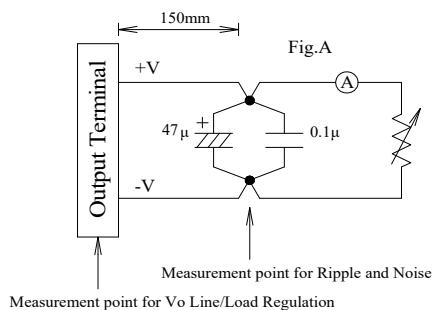

CUS30M/M


OUTPUT DERATING

CA851-01-02/M

OUTPUT DERATING VERSUS OPERATING AMBIENT TEMPERATURE(Ta)**1. CUS30M-12/M,-24/M**


* COOLING: CONVECTION COOLING
FOR STANDARD MOUNTING

Ta (°C)	Load (%)
-20 - +50	100
70	50

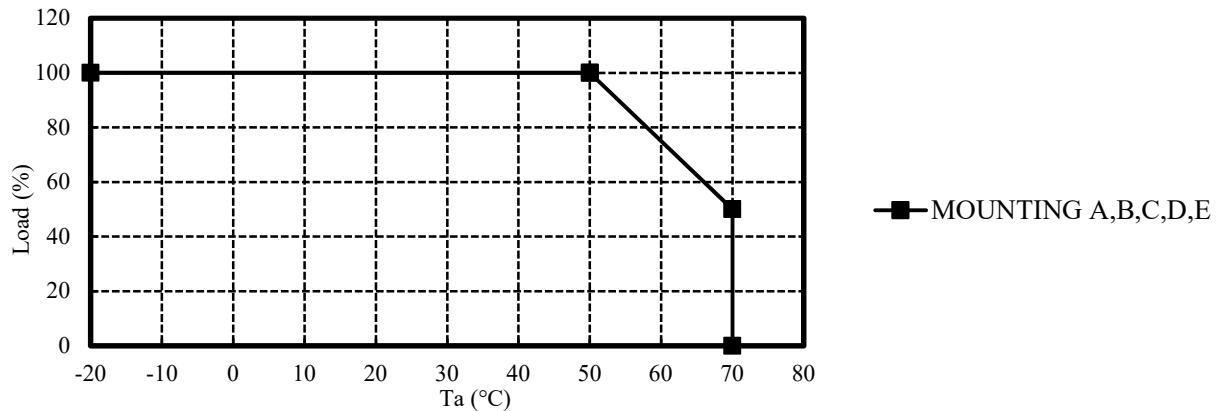**2. CUS30M-48/M**

* COOLING: CONVECTION COOLING
FOR STANDARD MOUNTING

Ta (°C)	Load (%)
-20 - +45	100
70	50

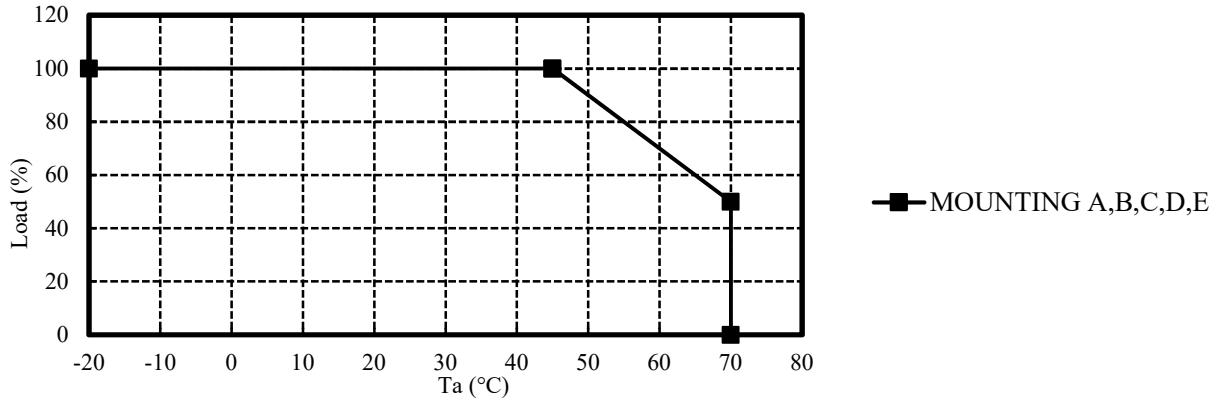

CUS30M/M

OUTPUT DERATING

CA851-01-03/M

OUTPUT DERATING VERSUS INPUT VOLTAGE

FOR STANDARD MOUNTING AND ALL MODELS

Input Voltage (VAC)	Load (%)
85	80
115~265	100

