

CUS60M/M

(/M : With Molex connector option)

SPECIFICATIONS


CA849-01-01/M-A

ITEMS		MODEL	CUS60M -5/M	CUS60M -12/M	CUS60M -15/M	CUS60M -18/M	CUS60M -24/M	CUS60M -48/M	
1	Nominal Output Voltage	V	5	12	15	18	24	48	
2	Maximum Output Current	A	6	5.0	4.0	3.35	2.5	1.25	
3	Maximum Output Power	W	30.0	60.0	60.0	60.3	60	60	
4	Efficiency (Typ.)	115/230 VAC (*1)	%	81 / 81	87 / 88	87.5 / 87	88 / 88	89 / 90	90 / 91
5	Active Average Efficiency related to Erp	115/230 VAC (*1)	-	81 / 79.5	87 / 86	87 / 86.5	87 / 87	88 / 87	90 / 89
6	No Load Power Consumption	W	< 0.5 @ 265VAC , Ta=25°C, Nominal Output Voltage						
7	Input Voltage Range	(*2)	-	85 - 265 VAC (47-63Hz)					
8	Input Current (Typ.)	115/230 VAC (*1)	A	0.7/ 0.5	1.2 / 0.8				
9	Inrush Current (Typ.)	(*1)(*3)	A	30 / 60 at Cold Start					
10	Output Voltage	-	Fixed Shipment condition: 5V: ±3%; 12V,15V,18V,24V,48V: ±2.5%						
11	Maximum Ripple & Noise(Ta>0°C/Ta<=0°C) (*1)(*4)(*5)	mV	120 / 200	120 / 200	150 / 500	150 / 500	150 / 500	200 / 500	
12	Maximum Ripple & Noise (0%~35% Load) (*4)(*5)	mV	240	280	280	280	280	480	
13	Maximum Line Regulation (*4)(*6)	mV	20	48	60	72	96	192	
14	Maximum Load Regulation (*4)(*7)	mV	100	120	120	144	192	384	
15	Temperature Coefficient (*4)	-	Less than 0.02% / °C						
16	Over Current Protection (*8)	-	>105% of Maximum Output Current . 12V,15V,18V,24V Class 2 limited power source						
17	Over Voltage Protection (*9)	-	Above 120% ~ , shutdown						
18	Hold-up time (Typ.)	115/230 VAC (*1)	ms	20 / 100					
19	Earth Leakage Current (*10)	-	0.2mA max @265VAC,60Hz						
20	Patient Leakage Current	-	60uA max @265VAC , 60Hz , Input to Output						
21	Parallel Operation	-	No						
22	Series Operation	-	Possible						
23	Operating Temperature (*11)	-	-20°C ~ +70°C						
24	Operating Humidity	-	10 - 90%RH (No condensing)						
25	Storage Temperature	-	-40°C ~ +85°C						
26	Storage Humidity	-	10 - 90%RH (No condensing)						
27	Operating Altitude	-	5000m, derating 5°C/1000m above 3000m						
28	Isolation Class / Class of Protection	-	Class I (L,N,FG) or ClassII (L,N)						
29	Cooling	-	Convection Cooling						
30	Withstand Voltage	-	Input-Output : 4kVAC (20mA) 2xMOPP, Input-FG : 2kVAC (20mA) 1xMOPP, Output-FG : 1.5kVAC (20mA) 1xMOPP						
31	Isolation Resistance	-	More than 100MΩ at 25°C,70%RH, Output - FG : 500VDC						
32	Vibration	-	At no operating, 10-500Hz (Sweep for 1min.) Maximum 19.6m/s ² X,Y,Z 1 hour each						
33	Shock	-	Less than 196m/s ²						
34	Safety	-	Approved by IEC/EN62368-1, UL62368-1, CSA62368-1 Approved by IEC/EN60601-1, ES60601-1, CSA-C22.2 No.60601-1						
35	Pollution	-	Degree 2, material group 3						
36	EMI (*1)	-	Designed to meet EN55011-B, EN55032-B, FCC-Class B						
37	Immunity	-	Designed to meet IEC61000-4-2 (Level 4,3), IEC61000-4-3 (Level 3), IEC61000-4-4 (Level 3), IEC61000-4-5 (Level 3,4), IEC61000-4-6 (Level 3), IEC61000-4-8 (Level 4) , IEC60601-1-2 Ed.4 , Criteria A						
38	Line voltage dip	-	SEMI47 (Input Voltage: 200VAC ~ 240VAC)						
		-	Designed to meet IEC61000-4-11(Class 3): Criteria A: 200VAC~240VAC Criteria B: 100VAC~120VAC						
		-	Designed to meet IEC61000-4-11 (Class 2) : IEC60601-1-2 Ed.4 Criteria A : Input Voltage above 120VAC or output below 70% of Maximum Output Current Criteria B : Input Voltage below 120VAC and Output Current more than 70%						
39	Weight (Typ.)	g	120						
40	Size (L x W x H)	inch	3 x 2 x 1.05 (Refer to Outline Drawing)						

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At 115VAC/230VAC, Ta=25°C, nominal output voltage and maximum output power
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, input voltage range will be 100 ~ 240VAC (50-60Hz).
Output derating required when Vin is less than 100VAC, refer output derating curve for details.
- *3. Not applicable for the in-rush current to noise filter for less than 0.2ms.
- *4. Please refer to Fig. A for measurement of Vo, line and load regulation and ripple voltage
- *5. Ripple & noise are measured at 20MHz by using a 150mm twisted pair of load wires terminated with a 0.1uF and 47uF capacitor.
- *6. 85~265VAC, constant load.
- *7. No load - full load, constant input voltage.
- *8. Hiccup with automatic recovery. Avoid operating at over load or short circuit condition.
- *9. OVP circuit shut down the output, manual reset (Re power on) to get output voltage.
- *10. Measured by the each measuring method of UL, CSA, and EN (at 60Hz), Ta=25°C.
- *11. Refer to output derating curve for details of output derating versus input voltage, ambient temperature and mounting method .
- Load (%) is percent of maximum output power or maximum output current. Do not exceed its derating of maximum Load
- Maximum load start up at -30°C is possible. However, it may not fulfill all the specifications

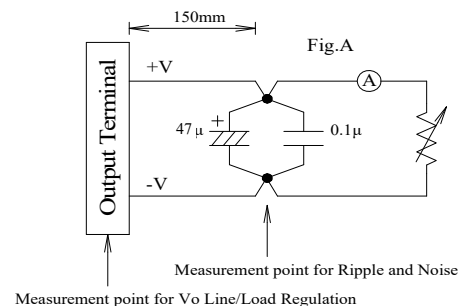

CUS60M/M

OUTPUT DERATING


CA849-01-02/M

OUTPUT DERATING VERSUS OPERATING AMBIENT TEMPERATURE (Ta)

* COOLING: CONVECTION COOLING

1. CUS60M-5/M,18/M,48/M


Ta (°C)	Load (%)
	Mounting A,B,C,D,E
-20 - +50	100
70	50

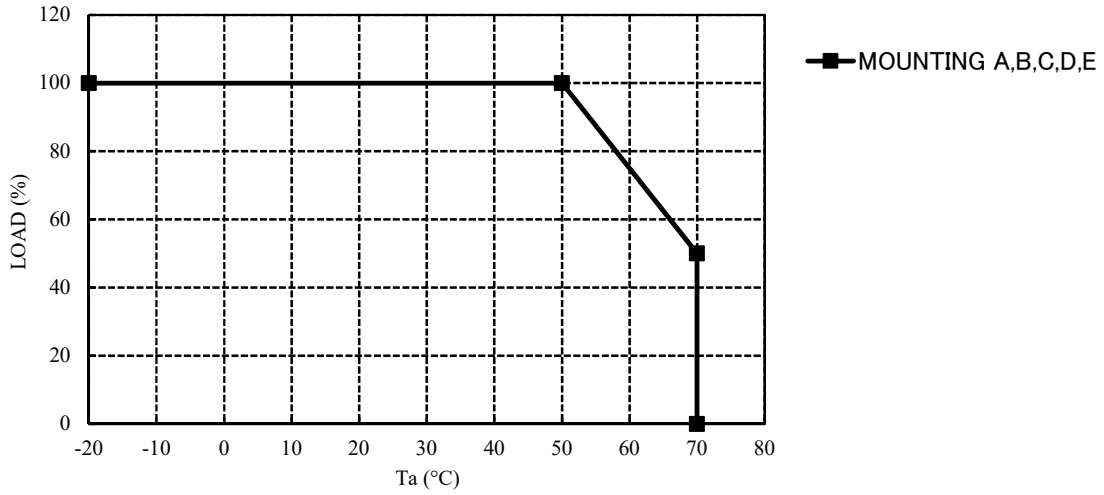

2. CUS60M-12/M

Ta(°C)	LOAD(%)
	MOUNTING A,B,C,D
-20~45	100
70	50

Ta(°C)	LOAD(%)
	MOUNTING E
-20~45	100
70	40

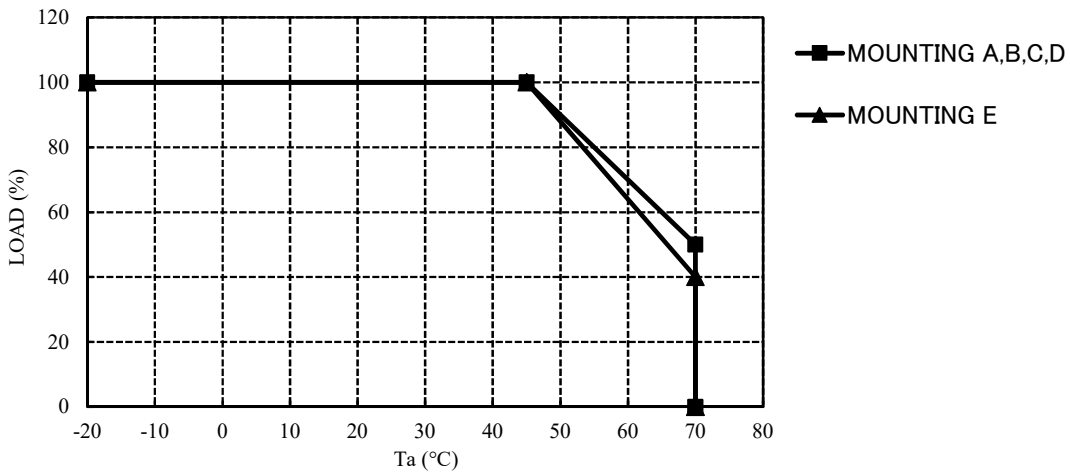

CUS60M/M

OUTPUT DERATING

CA849-01-03/M


OUTPUT DERATING VERSUS OPERATING AMBIENT TEMPERATURE (Ta)

* COOLING: CONVECTION COOLING

3. CUS60M-15/M

Ta (°C)	Load (%)
	Mounting A,C,D
-20 - +40	100
70	50


Ta (°C)	Load (%)
	Mounting B,E
-20 - +40	100
55	75
66	50
70	25

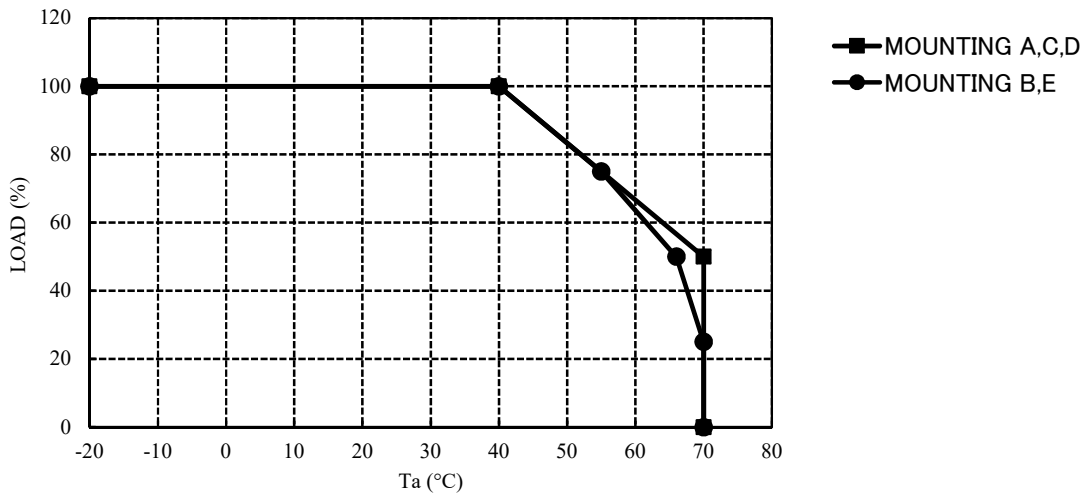

4. CUS60M-24/M

Ta (°C)	Load (%)
	Mounting A,C,D,
-20 - +50	100
70	50

Ta (°C)	Load (%)
	Mounting B,E
-20 - +46	100
70	40

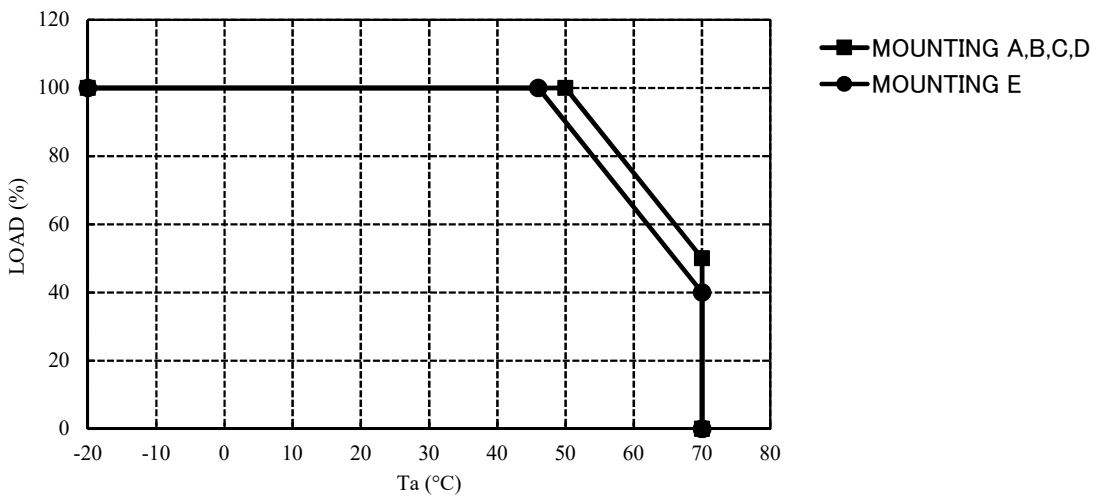

CUS60M/M

OUTPUT DERATING

CA849-01-04/M

OUTPUT DERATING VERSUS INPUT VOLTAGE

* COOLING: CONVECTION COOLING

CUS60M-5/M,24/M

Mounting A,B,C,D,E

INPUT VOLTAGE (VAC)	LOAD (%)
85~265	100

CUS60M-12/M,18/M,48/M


Mounting A,B,C,D,E

INPUT VOLTAGE (VAC)	LOAD (%)
85	80
100~265	100

CUS60M-15/M

Mounting A,B,C,D,E

INPUT VOLTAGE (VAC)	LOAD (%)
85	60
100~265	100

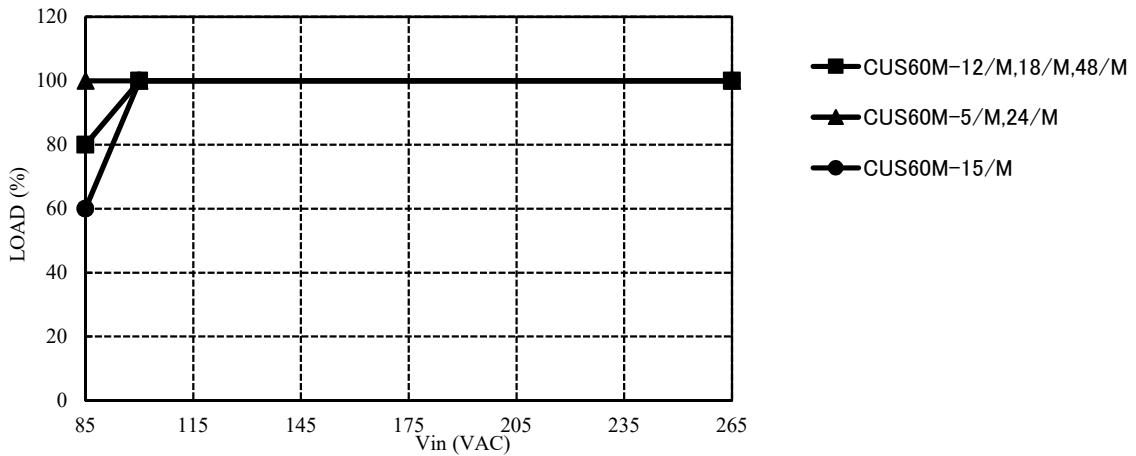

MOUNTING METHOD

