

**RWS600B/R**

SPECIFICATIONS

A262-01-01/R-F


ITEMS		MODEL	RWS600B -5/R	RWS600B -12/R	RWS600B -15/R	RWS600B -24/R	RWS600B -36/R	RWS600B -48/R	
1	Nominal Output Voltage	V	5	12	15	24	36	48	
2	Maximum Output Current	A	100	50	40	25	16.7	12.5	
3	Maximum Output Power	W	500	600	600	600	601.2	600	
4	Efficiency (Typ) (*1)(*11)	100VAC	%	74	81	81	84	85	85
		200VAC	%	77	84	84	88	88	88
5	Input Voltage Range (*2)(*11)	-	85 - 265VAC (47 - 63Hz) or 120 - 330VDC						
6	Input Current (Typ) (*1)(*11)	A	6.5/3.6 / 7.2/4.0						
7	Inrush Current (Typ) (*1)(*3)(*11)	-	20A at 100VAC, 40A at 200VAC, Ta=25°C						
8	PFHC	-	Designed to meet IEC61000-3-2						
9	Power Factor (Typ) (*1)(*11)	-	0.95/0.90						
10	Output Voltage Range	V	4.50 - 5.75	10.8 - 13.8	13.5 - 17.2	21.6 - 27.6	32.4 - 41.4	43.2 - 52.8	
11	Maximum Ripple & Noise (*4)	0≤Ta≤70°C	mV	120	150	150	150	200	200
		-20≤Ta<0°C	mV	160	180	180	180	240	500
12	Maximum Line Regulation (*5)(*11)	mV	20	48	60	96	144	192	
13	Maximum Load Regulation (*6)(*11)	mV	40	96	120	192	288	384	
14	Temperature Coefficient	-	Less than 0.02% / °C						
15	Over Current Protection (*7)	A	105.0 -	52.5 -	42.0 -	26.3 -	17.5 -	13.1 -	
16	Over Voltage Protection (*8)	V	6.0 - 7.0	14.4 - 16.8	18.0 - 21.0	28.8 - 33.6	43.2 - 50.4	55.2 - 64.8	
17	Hold-up Time (Typ) (*12)	-	20ms						
18	Leakage Current (*9)	-	Less than 0.75mA						
19	Remote Control	-	Possible						
20	Series Operation	-	Possible						
21	Operating Temperature (*10)(*11)	-	-20 - +70°C (-20 - +50°C:100%, +70°C:50%)						
22	Operating Humidity	-	30 - 90%RH (No Condensing)						
23	Storage Temperature	-	-30 - +75°C						
24	Storage Humidity	-	10 - 90%RH (No Condensing)						
25	Cooling	-	Forced Air Cooling						
26	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (100mA) for 1min						
27	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output to Chassis : 500VDC						
28	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s <sup>2</sup> Constant, X,Y,Z 1hour each.						
29	Shock	-	Less than 196.1m/s <sup>2</sup>						
30	Safety	-	Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020) UL508 (24V Only), CSA C22.2 No.107.1-01. (24V Only). Designed to meet Den-an Appendix 8 at 100VAC only.						
31	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)						
32	Conducted Emission (*14)	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B						
33	Radiated Emission (*13)(*14)	-	Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B						
34	Immunity (*14)	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11						
35	Weight (Typ)	g	1600						
36	Size (W x H x D)	mm	61 x 120 x 190 ( Refer to Outline Drawing )						

\*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- \*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- \*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 240VAC(50-60Hz).
- \*3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- \*4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.
- \*5. 85 - 265VAC, constant load.
- \*6. No load-Full load, constant input voltage.
- \*7. 5V - 15V model: Constant current limit and hiccup with automatic recovery.  
24V - 48V model: Constant current limit with automatic recovery.  
Avoid to operate at over load or short circuit condition.
- \*8. OVP circuit will shut down output, manual reset (Re power on).
- \*9. Measured by the each measuring method of UL, CSA, EN and Den-an(at 60Hz), Ta=25°C.
- \*10. Output Derating
  - Derating at standard mounting. Refer to LOAD vs. AMBIENT TEMPERATURE (A262-01-02/R- ).
  - Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
- \*11. Output derating needed when input voltage less than 110VAC. Refer to LOAD vs. INPUT VOLTAGE (A262-01-02/R- ).
- \*12. At 110VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- \*13. With clamp filter (TDK ZCAT3035-1330) on input line.
- \*14. The power supply is considered a component which will be installed into a final equipment.  
The final equipment should be re-evaluated that it meets EMC directives.

Fig.A

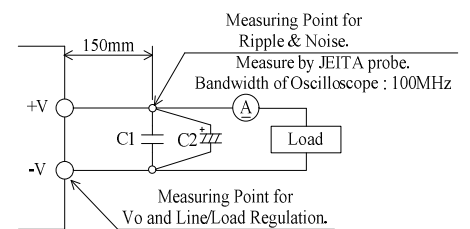

C1 : Film Cap. 0.1μF  
C2 : Elect. Cap. 100μF

**RWS600B/R**

OUTPUT DERATING

A262-01-02/R-A

Ta (°C)	LOAD (%)
	MOUNTING A-D
-20 - +50	100
70	50

INPUT VOLTAGE (VAC)	LOAD (%)
	MOUNTING A-D
85	80
100	92
110 - 265	100

