

VS100E/L

SPECIFICATIONS

A241-01-01/L-B

| ITEMS | | MODEL | VS100E -3/L | VS100E -5/L | VS100E -12/L | VS100E -15/L | VS100E -24/L | VS100E -48/L | |
|-------|------------------------------------|-------------|---|----------------|-----------------|-----------------|-----------------|-----------------|-----|
| 1 | Nominal Output Voltage | V | 3.3 | 5 | 12 | 15 | 24 | 48 | |
| 2 | Maximum Output Current | A | 20 | 20 | 8.5 | 7.0 | 4.3 | 2.2 | |
| 3 | Maximum Output Power | W | 66.0 | 100.0 | 102.0 | 105.0 | 103.2 | 105.6 | |
| 4 | Efficiency (Typ) | (*1) % | 80 | 85 | 85 | 85 | 86 | 87 | |
| 5 | Input Voltage Range | (*2) - | 85 - 132VAC (47 - 63Hz) or 110 - 175VDC | | | | | | |
| 6 | Input Current (Typ) | (*1) A | 1.5 | 2.1 | | | | | |
| 7 | Inrush Current (Typ) | (*1) - | 30A at Cold Start | | | | | | |
| 8 | Output Voltage Range | V | 2.97 - 3.63 | 4.5 - 5.5 | 10.8 - 13.2 | 13.5 - 16.5 | 21.6 - 26.4 | 43.2 - 52.8 | |
| 9 | Maximum Ripple & Noise (*3)(*4) | 0≤Ta<70°C | mV | 120 | 120 | 150 | 150 | 150 | 200 |
| | | -10≤Ta<0°C | mV | 160 | 160 | 180 | 180 | 180 | 240 |
| 10 | Maximum Line Regulation | (*3)(*5) mV | 20 | 20 | 48 | 60 | 96 | 192 | |
| 11 | Maximum Load Regulation | (*3)(*6) mV | 40 | 40 | 96 | 120 | 150 | 240 | |
| 12 | Temperature Coefficient | (*3) - | Less than 0.02% / °C | | | | | | |
| 13 | Over Current Protection | (*7) A | 21.0 < | 21.0 < | 8.92 < | 7.35 < | 4.51 < | 2.31 < | |
| 14 | Over Voltage Protection | (*8) V | 3.80 - 4.46 | 5.75 - 6.75 | 13.8 - 16.2 | 17.3 - 20.3 | 27.6 - 32.4 | 55.2 - 64.8 | |
| 15 | Hold-up Time (Typ) | (*1) - | 20ms | | | | | | |
| 16 | Leakage Current | (*9) - | Less than 0.5mA | | | | | | |
| 17 | Parallel Operation | - | - | | | | | | |
| 18 | Series Operation | - | Possible | | | | | | |
| 19 | Operating Temperature | (*10) - | Convection : -10 to +70°C (-10 to +50°C:100%, +60°C:70%, +70°C:20%) | | | | | | |
| 20 | Operating Humidity | - | 30 to- 90%RH (No Condensing) | | | | | | |
| 21 | Storage Temperature | - | -30 to +85°C | | | | | | |
| 22 | Storage Humidity | - | 10 to 95%RH (No Condensing) | | | | | | |
| 23 | Cooling | - | Convection Cooling | | | | | | |
| 24 | Withstand Voltage | - | Input - FG : 2kVAC (10mA), Input - Output : 2kVAC (10mA) Output - FG : 500VAC (20mA) for 1min | | | | | | |
| 25 | Isolation Resistance | - | More than 100MΩ at 25°C and 70%RH Output - FG : 500VDC | | | | | | |
| 26 | Vibration | - | At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each. | | | | | | |
| 27 | Shock | - | Less than 196.1m/s ² | | | | | | |
| 28 | Safety | - | Approved by UL62368-1, CSA62368-1, EN62368-1, UL60950-1, CSA60950-1, EN60950-1 (Expire date of 60950-1 : 20/12/2020), EN50178(OV II), Designed to meet Den-an Appendix12 (J60950-1) | | | | | | |
| 29 | Conducted Emission | - | Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B | | | | | | |
| 30 | Radiated Emission | - | Designed to meet EN55011/EN55032-B, FCC-B, VCCI-B | | | | | | |
| 31 | Immunity | - | Designed to meet IEC61000-4-2(Level 2,3), -3(Level 3), -4(Level 3), -5(Level 2,3), -6(Level 3), -8(Level 4), -11 | | | | | | |
| 32 | Weight (Typ) | g | 430 | | | | | | |
| 33 | Size (W x H x D) | mm | 72 x 45 x 185 (Refer to Outline Drawing) | | | | | | |

*Read instruction manual carefully, before using the power supply unit.


=NOTES=

- *1. At 100VAC, Ta=25°C, nominal output voltage and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 - 120VAC(50/60Hz).
- *3. Please refer to Fig. A for measurement of line & load regulation and ripple voltage.
- *4. For start up at low ambient temperature and low input voltage, output ripple noise might not meet specification. However, there is no overshoot at start up and output ripple noise specification can be met after one second.
- *5. 85 - 132VAC, constant load.
- *6. No load-Full load, constant input voltage.
- *7. 3.3, 5V model : Constant current limit and hiccup with automatic recovery.
12 - 48V model : Constant current limit with automatic recovery.
Avoid to operate at over load or short circuit condition for more than 30seconds.
- *8. OVP circuit will shut the output down, manual reset (Re power on).
- *9. Measured by the each measuring method of UL, CSA, EN and DENAN(at 60Hz), Ta=25°C.
- *10. Ratings

- Derating at standard mounting. Refer to output derating curve(A241-01-02_).

- Load (%) is percent of maximum output power or maximum output current, whichever is greater.

Fig. A

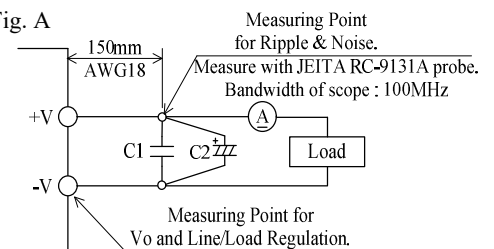

C1 : Film Cap. 0.1 μF
C2 : Elec. Cap. 100 μF