

ZBM20

RELIABILITY DATA

INDEX

	PAGE
1. Calculated Values of MTBF	R-1
2. Components Derating	R-2-4
3. Main Components Temperature Rise ΔT List	R-5-6
4. Electrolytic Capacitor Lifetime	R-7-18
5. Abnormal Test	R-19-20
6. Vibration Test	R-21
7. Noise Simulate Test	R-22
8. Thermal Shock Test	R-23

※ Test results are typical data. Nevertheless the following results are considered to be reference data because all units have nearly the same characteristics.

1. Calculated values of MTBF

(1) MTBF Parts stress reliability projection MTBF

MODEL : ZBM20-24

Calculating Method

Calculated based on parts stress reliability projection of Telcordia (*1).

Individual failure rate λ_{ssi} is calculated by the electric stress and temperature rise of each part.

Formula :

*1 : Telcordia document (Bellcore) "Reliability Prediction Procedure for Electronic Equipment".
(Document number TR-332, Issue 5)

$$MTBF = \frac{1}{\lambda_{equip}} = \frac{1}{\pi_E \sum_{i=1}^m (N_i \cdot \lambda_{ssi})} \times 10^9 \text{(Hours)}$$

$$\lambda_{ssi} = \lambda_{Gi} \cdot \pi_{Qi} \cdot \pi_{Si} \cdot \pi_{Ti}$$

Where :

- λ_{equip} : Total equipment failure rate (FITs = Failures in 10^9 hours).
- λ_{Gi} : Generic failure rate for the ith part.
- π_{Qi} : Quality factor for the ith part.
- π_{Si} : Stress factor for the ith part.
- π_{Ti} : Temperature factor for the ith part.
- m : Number of different part types.
- N_i : Quantity of ith part type.
- π_E : Equipment environmental factor.

MTBF Values

Conditions :

Input Voltage : 24Vdc
Buffer Current : 100%
Ambient Temperature : 25°C

Environmental Factor GF (GROUND, FIXED)
Mounting Method : Standard mounting A

MTBF : 1,962,074 (Hours)

2. Components Derating

MODEL : ZBM20-24

(1) Calculating Method

(a) Measuring Conditions

Input	: 24Vdc	Ambient temperature	: 70°C
Load	: 100%	Mounting method	: Standard mounting A

(b) Semiconductors

Compared with maximum junction temperature and actual one which is calculated based on case temperature, power dissipation and thermal impedance.

(c) IC, Resistors, Capacitors, etc.

Ambient temperature, operating condition, power dissipation and so on are within derating criteria.

(d) Calculating Method of Thermal Impedance

$$\theta_{j-c} = \frac{T_{j(max)} - T_c}{P_{ch(max)}} \qquad \theta_{j-l} = \frac{T_{j(max)} - T_l}{P_{ch(max)}}$$

T_c : Case temperature at start point of derating ; 25°C in general

T_l : Lead temperature at start point of derating ; 25°C in general

$P_{ch(max)}$: Maximum channel dissipation

$T_{j(max)}$: Maximum junction (channel) temperature
 $(T_{ch(max)})$

θ_{j-c} : Thermal impedance between junction (channel) and case
 (θ_{ch-c})

θ_{j-l} : Thermal impedance between junction (channel) and lead
 (θ_{ch-l})

(2) Components Derating List







Location No.	READY MODE		
	$V_{in} = 24V_{dc}$	Load = 100%	$T_a = 70^{\circ}C$
Q3 TPCA8046-H TOSHIBA	$T_j(max) = 150^{\circ}C$ $P_{ch} = 0.7774 W$ $T_j = T_c + ((\theta_{j-c}) \times P_{ch}) = 79.06^{\circ}C$ D.F. = 52.7%	$\theta_{j-c} = 2.78^{\circ}C/W$ $\Delta T_c = 6.9^{\circ}C$	$P_{ch(max)} = 45 W$ $T_c = 77^{\circ}C$
Q102 IPD50R380CE INFINEON	$T_j(max) = 150^{\circ}C$ $P_{ch} = 0.2348 W$ $T_j = T_c + ((\theta_{j-c}) \times P_{ch}) = 87.50^{\circ}C$ D.F. = 58.3%	$\theta_{j-c} = 1.27^{\circ}C/W$ $\Delta T_c = 17.2^{\circ}C$	$P_{ch(max)} = 98 W$ $T_c = 87^{\circ}C$
Q105 MJD44H11RLG ON SEMI.	$T_j(max) = 150^{\circ}C$ $P_c = 1.1 W$ $T_j = T_c + ((\theta_{j-c}) \times P_c) = 103.16^{\circ}C$ D.F. = 68.8%	$\theta_{j-c} = 6.25^{\circ}C/W$ $\Delta T_c = 26.6^{\circ}C$	$P_c(max) = 20 W$ $T_c = 97^{\circ}C$
D106 MURS360BT3G ON SEMI.	$T_j(max) = 175^{\circ}C$ $P_d = 0.01 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 85.68^{\circ}C$ D.F. = 49.0%	$\theta_{j-c} = 14^{\circ}C/W$ $\Delta T_c = 15.6^{\circ}C$	$T_c = 86^{\circ}C$
PC1 TLP241AF(D4,F(O TOSHIBA	$T_j(max) = 125^{\circ}C$ $P_d = 0.0001 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 74.20^{\circ}C$ D.F. = 59.4%	$\theta_{j-c} = 30^{\circ}C/W$ $\Delta T_c = 4.2^{\circ}C$	$P_d(max) = 0.6 W$ $T_c = 74^{\circ}C$
PC401 TLP785F(D4GRT7,F(C TOSHIBA	$T_j(max) = 125^{\circ}C$ $P_d = 0.02 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 80.20^{\circ}C$ D.F. = 64.2%	$\theta_{j-c} = 150^{\circ}C/W$ $\Delta T_c = 7.7^{\circ}C$	$P_d(max) = 0.2 W$ $T_c = 78^{\circ}C$
A100 AP3843CMTR-E1 DIODES	$T_j(max) = 150^{\circ}C$ $P_d = 0.216 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 98.95^{\circ}C$ D.F. = 66.0%	$\theta_{j-c} = 39.1^{\circ}C/W$ $\Delta T_c = 20.5^{\circ}C$	$P_d(max) = 0.5 W$ $T_c = 91^{\circ}C$

(2) Components Derating List

Location No.	BUFFER MODE		
	$V_{in} = 24V_{dc}$	Load = 100%	$T_a = 70^{\circ}C$
Q203 FMP60N079S2HF FUJI ELECTRIC	$T_j(max) = 150^{\circ}C$ $P_{ch} = 53.4 W$ $T_j = T_c + ((\theta_{j-c}) \times P_{ch}) = 101.93^{\circ}C$ D.F. = 68.0%	$\theta_{j-c} = 0.46^{\circ}C/W$ $\Delta T_c = 7.2^{\circ}C$	$P_{ch(max)} = 270 W$ $T_c = 77^{\circ}C$
Q209 FMP60N079S2HF FUJI ELECTRIC	$T_j(max) = 150^{\circ}C$ $P_{ch} = 31.6 W$ $T_j = T_c + ((\theta_{j-c}) \times P_{ch}) = 97.43^{\circ}C$ D.F. = 65.0%	$\theta_{j-c} = 0.46^{\circ}C/W$ $\Delta T_c = 12.8^{\circ}C$	$P_{ch(max)} = 270 W$ $T_c = 83^{\circ}C$
D215 YG985C3R FUJI ELECTRIC	$T_j(max) = 150^{\circ}C$ $P_d = 15.83 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 111.30^{\circ}C$ D.F. = 74.2%	$\theta_{j-c} = 1.75^{\circ}C/W$ $\Delta T_c = 13.6^{\circ}C$	$T_c = 84^{\circ}C$
D216 MBR2545CTG ON SEMI.	$T_j(max) = 175^{\circ}C$ $P_d = 13.00 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 96.70^{\circ}C$ D.F. = 55.3%	$\theta_{j-c} = 1.5^{\circ}C/W$ $\Delta T_c = 7.2^{\circ}C$	$T_c = 77^{\circ}C$
PC400 TLP785F(D4GRT7,F(C TOSHIBA	$T_j(max) = 125^{\circ}C$ $P_d = 0.02 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 78.90^{\circ}C$ D.F. = 63.1%	$\theta_{j-c} = 150^{\circ}C/W$ $\Delta T_c = 6.4^{\circ}C$	$P_d(max) = 0.2 W$ $T_c = 76^{\circ}C$
A200 AP3843CMTR-E1 DIODES	$T_j(max) = 150^{\circ}C$ $P_d = 0.216 W$ $T_j = T_c + ((\theta_{j-c}) \times P_d) = 86.85^{\circ}C$ D.F. = 57.9%	$\theta_{j-c} = 39.1^{\circ}C/W$ $\Delta T_c = 8.4^{\circ}C$	$P_d(max) = 0.5 W$ $T_c = 78^{\circ}C$

3. Main components temperature rise ΔT list







MODEL : ZBM20-24

Mounting Method	Mounting A	Mounting B	Mounting C	Mounting D	Mounting E	Mounting F
						
Input Voltage (VDC)	24					
Load (A)	20					
Operation	Ready mode (Fixed Mode)					

Output Derating		I _{out} = 100% Ta = 70°C					
Location No	Parts Name	ΔT Temperature rise (°C)					
A100	CHIP IC	20.5	20.6	17.2	18.8	18.3	21.5
A200	CHIP IC	8.5	6.6	8.3	6.7	8.8	9.1
A209	CHIP IC	15.0	10.3	10.4	12.4	12.0	16.6
C112	E.CAP.	5.1	4.4	3.3	4.1	3.8	4.6
C114	E.CAP.	1.2	1.2	0.6	0.1	2.2	1.2
C115	E.CAP.	1.9	0.8	2.5	0.5	3.0	1.6
C116	E.CAP.	3.9	1.5	3.1	2.6	2.9	2.6
C121	E.CAP.	3.1	4.6	1.7	2.6	3.2	4.2
C215	E.CAP.	5.6	3.2	5.4	7.5	4.0	6.4
C231	E.CAP.	2.5	0.9	1.9	5.7	0.1	3.2
C238	E.CAP.	5.4	3.9	4.7	5.3	5.2	5.7
D106	F.R. DIODE	15.6	15.1	11.2	14.3	12.0	16.7
D215	F.R. DIODE	9.9	7.1	9.1	9.5	8.7	10.5
D216	S.B. DIODE	6.9	4.5	4.8	9.1	1.8	6.9
L100	CHOKE COIL	1.8	2.7	0.1	2.9	0.6	2.4
L200	CHOKE COIL	6.1	2.8	5.2	5.6	4.1	5.3
PC1	PHOTO RELAY	4.2	2.2	6.7	7.0	1.2	6.3
PC200	CHIP PHOTO DIODE	22.3	18.9	19.4	23.3	16.9	23.9
PC400	CHIP PHOTOCOUPLER	6.5	4.5	6.3	8.8	3.2	6.8
PC401	CHIP PHOTOCOUPLER	7.7	5.6	8.1	10.2	4.4	8.2
PC402	CHIP PHOTOCOUPLER	5.6	3.5	7.0	8.5	2.4	6.8
PD100	LED	2.0	1.0	2.0	4.2	5.3	2.1
Q3	MOSFET	6.9	6.0	5.6	10.4	4.0	8.7
Q102	MOSFET	17.2	17.3	13.3	16.5	13.6	18.3
Q105	CHIP TRANSISTOR	26.6	21.2	21.8	23.7	21.0	28.6
Q203	MOSFET	7.2	3.4	6.8	6.2	5.7	6.0
Q209	MOSFET	7.6	5.3	6.8	9.3	4.0	8.0
Q411	CHIP MOSFET	3.8	0.6	6.2	3.9	2.5	4.5
Q412	CHIP MOSFET	6.3	3.4	8.2	6.9	4.7	7.4
RT1	THERMISTOR	6.9	3.6	3.0	4.5	0.8	5.2
SA1	VARISTOR	0.4	0.9	3.5	4.9	2.3	1.5
SW1	SWITCH	3.3	1.3	7.2	4.2	3.1	6.0
T200	TRANSFORMER	2.9	0.8	5.3	3.2	2.8	3.4

3. Main components temperature rise ΔT list

MODEL : ZBM20-24

Mounting Method	Mounting A	Mounting B	Mounting C	Mounting D	Mounting E	Mounting F
						
Input Voltage (VDC)	24					
Buffer Current (A)	20					
Operation	Buffer mode (Fixed Mode)					

Output Derating		$I_{out} = 100\%$ $T_a = 70^\circ\text{C}$					
Location No	Parts Name	ΔT Temperature rise ($^\circ\text{C}$)					
A100	CHIP IC	20.2	20.2	16.9	18.5	18.1	21.3
A200	CHIP IC	8.4	6.5	8.3	6.6	8.7	9.1
A209	CHIP IC	14.6	10.1	10.3	12.1	12.0	16.5
C112	E.CAP.	5.0	4.5	3.3	4.1	3.9	4.6
C114	E.CAP.	1.1	1.1	0.6	0.2	2.2	1.2
C115	E.CAP.	1.9	0.7	2.6	0.6	3.1	1.6
C116	E.CAP.	3.9	1.4	3.1	2.5	2.9	2.6
C121	E.CAP.	3.0	4.5	1.7	2.5	3.2	4.2
C215	E.CAP.	5.6	3.1	5.4	7.5	4.1	6.4
C231	E.CAP.	2.4	0.9	1.9	5.7	0.2	3.2
C238	E.CAP.	5.4	3.9	4.7	5.4	5.2	5.8
D106	F.R. DIODE	15.5	15.0	11.2	14.2	12.0	16.7
D215	F.R. DIODE	13.6	10.5	12.6	13.1	12.2	14.0
D216	S.B. DIODE	7.2	4.8	5.0	9.4	2.0	7.3
L100	CHOKE COIL	1.8	2.7	0.1	2.8	6.8	2.4
L200	CHOKE COIL	6.6	3.1	5.6	5.9	4.6	5.9
PC1	PHOTO RELAY	4.1	2.1	6.7	6.9	1.2	6.3
PC200	CHIP PHOTO DIODE	22.2	18.8	19.3	23.1	16.8	23.9
PC400	CHIP PHOTOCOUPLER	6.4	4.5	6.3	8.8	3.3	6.8
PC401	CHIP PHOTOCOUPLER	7.6	5.5	8.1	10.1	4.4	8.2
PC402	CHIP PHOTOCOUPLER	5.5	3.4	7.0	8.4	2.5	6.8
PD100	LED	2.0	0.9	2.0	4.2	5.3	2.1
Q3	MOSFET	9.2	8.7	8.2	12.7	6.7	11.3
Q102	MOSFET	17.1	17.2	13.2	16.4	13.5	18.3
Q105	CHIP TRANSISTOR	26.5	21.1	21.8	23.6	21.0	28.6
Q203	MOSFET	7.2	3.4	7.0	6.2	5.9	6.2
Q209	MOSFET	12.8	11.1	12.4	15.3	9.6	14.0
Q411	CHIP MOSFET	3.7	0.5	6.2	3.9	2.5	4.6
Q412	CHIP MOSFET	6.2	3.3	8.3	6.8	4.7	7.5
RT1	THERMISTOR	6.8	3.5	3.0	4.4	0.8	5.2
SA1	VARISTOR	0.3	1.0	0.1	4.8	2.3	1.5
SW1	SWITCH	3.3	1.2	7.2	4.1	3.1	6.0
T200	TRANSFORMER	2.9	0.9	5.4	3.3	3.0	3.5


4. Electrolytic capacitor lifetime

MODEL : ZBM20

Cooling condition : Convection cooling

Ready Mode

Mounting A



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.9

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.6

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.1

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.9

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.1

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.5	7.3

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20

Cooling condition : Convection cooling

Ready Mode

Mounting B



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.6

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.2

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.5

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.3

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.6

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.1

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20

Cooling condition : Convection cooling

Ready Mode

Mounting C



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	15.0

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.2

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.7

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.2

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	10.3

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.4

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20

Cooling condition : Convection cooling

Ready Mode

Mounting D

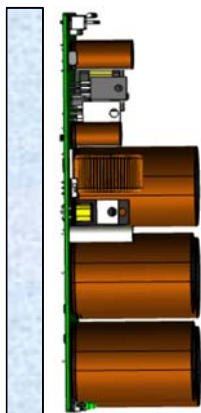

Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.9

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.8

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.9

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.5

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.8

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.8

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20

Cooling condition : Convection cooling

Ready Mode

Mounting E

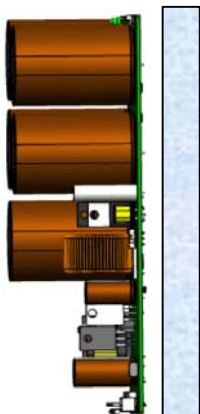

Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.8

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.8

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.9

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.8

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	10.0

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.0

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20

Cooling condition : Convection cooling

Ready Mode

Mounting F



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.3

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.0

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.7

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.2

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.4

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.3

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20/A

Cooling condition : Convection cooling

Ready Mode

Mounting A



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.4

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	14.1

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.5

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.8	6.6

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	7.9

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	13.0	6.5

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20/A

Cooling condition : Convection cooling

Ready Mode

Mounting B



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.7

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	12.7

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.5	6.4

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	6.7

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.4	7.2

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	11.9	6.0

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20/A

Cooling condition : Convection cooling

Ready Mode

Mounting C



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.6

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.1

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.1

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	7.1

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	8.0

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.2	7.1

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20/A

Cooling condition : Convection cooling

Ready Mode

Mounting D

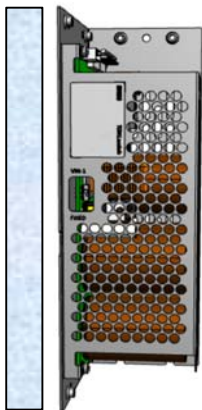

Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.8

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.5

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.2

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.1

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.8

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	9.0

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20/A

Cooling condition : Convection cooling

Ready Mode

Mounting E

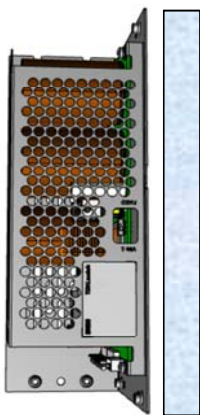

Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.1

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	12.9

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	13.8	6.1

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	13.1	5.8

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.0	7.0

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	11.5	5.7

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.


4. Electrolytic capacitor lifetime

MODEL : ZBM20/A

Cooling condition : Convection cooling

Ready Mode

Mounting F



Conditions
 Ta : 40°C
 : 50°C
 : 60°C
 : 70°C
 Load : 20A

12V

Vin : 12VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.3

Vin : 14.4VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	15.0	13.0

15V

Vin : 15VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.6	6.5

Vin : 18VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	13.5	6.0

24V

Vin : 24VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	14.4	7.2

Vin : 30VDC

Load \ Ta	Life Time (years)			
	40°C	50°C	60°C	70°C
100%	15.0	15.0	12.7	6.3

Note:

The lifetime is calculated based on our method and doesn't include the seal rubber degradation effect etc.

The upper limit of the electrolytic capacitors lifetime is 15 years.

5. Abnormal test

MODEL : ZBM20-24

(1) Test Conditions

Input Voltage: 24Vdc Load : 20A Ta : 25°C

(2) Test Results

(Da: Damaged)

No.	Test Position		Test Mode		Test Results											NOTE		
	LOCATION No.	TEST POINT	SHORT	OPEN	a	b	c	d	e	f	g	h	i	j	k		l	
					FIRE	SMOKE	BURST	SMELL	RED HOT	DAMAGE	FUSE BLOW	OV	OC	NO OUTPUT	NO CHANGE	OTHERS		
1	Q3	D-S	○												○			
		D-G	○												○			
		G-S	○												○			
		D		○											○		○	Unit discharged & charging disabled
		S		○											○		○	Unit discharged & charging disabled
		G		○												○		
2	Q102	D-S	○								○			○			Da: F1	
		D-G	○								○			○			Da: F1	
		G-S	○											○		○	Charging disabled.	
		D		○											○		○	Charging disabled
		S		○											○		○	Charging disabled
		G		○							○	○			○			Da: F1, Q102
3	Q203	D-S	○									○		○			Unit latched.	
		D-G	○							○		○		○			Unit latched & Da: Q203, Z204, A204, A200	
		G-S	○											○				
		D		○											○			
		S		○							○		○		○			Unit latched & Da: Q203
		G		○							○		○		○			Unit latched & Da: Q203
4	Q209	D-S	○												○	○	Buffer time increased.	
		D-G	○													○	Buffer time reduced.	
		G-S	○											○				
		D		○											○			
		S		○											○			
		G		○												○		
5	D106	A-K	○												○			
		A-K		○										○		○	Charging disabled.	
6	D112	A-K	○												○			
		A-K		○										○		○	Charging disabled.	
7	D215	A-K	○							○	○			○			Da: F2, Q203	
		A-K		○						○				○			Da: Z204	

5. Abnormal test

MODEL : ZBM20-24

(1) Test Conditions

Input Voltage: 24Vdc Load : 20A Ta : 25°C

(2) Test Results

(Da: Damaged)

No.	Test Position		Test Mode		Test Results											NOTE		
	LOCATION No.	TEST POINT	SHORT	OPEN	a	b	c	d	e	f	g	h	i	j	k		l	
					FIRE	SMOKE	BURST	SMELL	RED HOT	DAMAGE	FUSE BLOW	O P	O C P	NO OUTPUT	NO CHANGE	OTHERS		
8	D216	1 - 2	○												○			
		2 - 3	○												○			
		1		○												○		
		2		○											○			
		3		○												○		
9	L100	pin 1 - 4	○														○	Charging disabled.
		pin 1/4		○											○			
10	L200	pin 1 - 2	○														○	Ripple voltage increased
		pin 1/2		○											○			
11	T200	pin 1 - 2	○													○		
		pin 3 - 4	○														○	Ripple voltage increased & buzzing sounds.
		pin 1		○											○			
		pin 2		○											○			
		pin 3		○												○	○	OCP disabled.
		pin 4		○												○	○	OCP disabled.
12	C112		○												○			
				○												○		
13	C114		○												○			
				○												○		
14	C115		○												○			
				○												○		
15	C116		○												○			
				○												○		

6. Vibration Test

MODEL : ZBM20

(1) Vibration Test Class

Frequency Variable Endurance Test


(2) Equipment Used

Controller : F-400-BM-E47 (EMIC CORP.)
 Vibrator : 905-FN (EMIC CORP.)
 Serial no. : 22964

(3) Test Conditions

Sweep Frequency	: 10 - 55Hz	Direction	: X, Y, Z
Sweep Time	: 1 minute	Sweep count	: 1 hour each axis
Acceleration	: 19.6m/s ² (2G)		

(4) Test Method

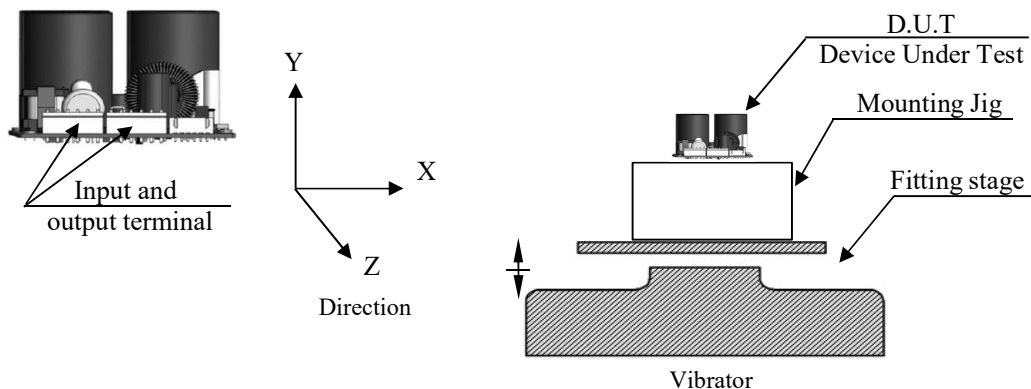

(5) Acceptable Conditions

1. No abnormalities on the appearance.
2. No abnormality on buffer voltage after test.


(6) Test results

OK

7. Noise Simulate Test

MODEL : ZBM20-24

(1) Test Circuit and Equipment

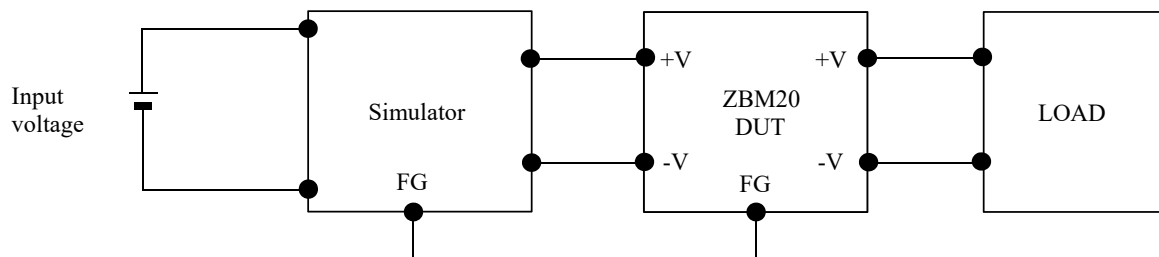

Simulator : INS-400L

(2) Test Conditions

Input voltage :	24Vdc	Noise level :	0V ~ 2kV
Output current :	0%, 100%	Phase shift :	0° ~ 360°
Ambient temperature :	25 °C	Polarity :	+, -
Pulse width :	50ns ~ 1000ns	Mode :	Common Normal
		Trigger select :	Line

(3) Acceptable Conditions

1. Input/Output voltage regulation not exceed +/- 5% of initial (before test) value during test.
2. Input/Output voltage must be within the regulation specification after the test.
3. No change on signals.
4. No blinking on LEDs.
5. Smoke and fire are not allowed.

(4) Test results

OK

8. Thermal Shock Test


MODEL : ZBM20-24

(1) Equipment Used

TSA-71S-A : ESPEC

(2) Test Conditions

Ambient Temperature : -40°C ~ +85°C
 Test Time : Refer to Drawing
 Test Cycle : 952 Cycles
 Not Operating : -

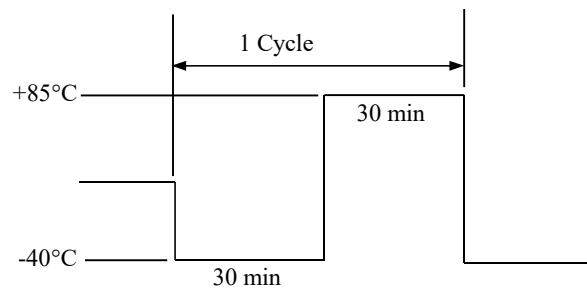

(3) Test Method

Before the test, check if there is no abnormality on buffer voltage and put the D.U.T in the testing chamber. Then test it in above cycles. After the test is completed, leave it for 1 hour at room temperature and check to make sure that there is no abnormality on buffer voltage.

(4) Acceptable Conditions

No abnormality on buffer voltage after test

(5) Test results

OK