## RWS1000B/ME

A273-01-01/ME-A

## SPECIFICATIONS (1/2)

MODEL				RWS1000B-12	RWS1000B-15	RWS1000B-24	RWS1000B-36	RWS1000B-48
ITEMS				/ME	/ME	/ME	/ME	/ME
1	Nominal Output Voltage			12	15	24	36	48
2	Maximum Output Current		A	84	67	42	28	21
3	Maximum Output Power	1	W	1008	1005	1008	1008	1008
4	Efficiency (Typ)	100/115VAC	%	81/82	81/82	84/85	84/85	83/85
	` /	200/230VAC	%	85/85	85/85	88/88	88/88	87/88
5	Input Voltage Range (*2)(*11)		-	85 - 265VAC (47 - 63Hz) or 120 - 340VDC				
6	Input Current (Typ) 100/115VAC (*13) 200/230VAC (*1)(*2)		A	13 / 11				
L_			A	7/5.5				
7	Inrush Current (Typ) (*1)(*3)		-	20A / 40A at 1st Inrush , 60A / 60A at 2nd Inrush				
8	PFHC Power Factor (Typ) (*1)		-	Designed to meet IEC61000-3-2 0.98/0.95				
10	Power Factor (Typ) (*1) Output Voltage Range		V	0.98/0.95 10.2 - 13.8   12.8 - 17.2   20.4 - 28.8   30.6 - 41.4   40.8 - 52.8				
11	Maximum Ripple & Noise	0 <to<600c< td=""><td>mV</td><td>150</td><td>150</td><td>180</td><td>250</td><td>300</td></to<600c<>	mV	150	150	180	250	300
11	(*4)	0 <u>≤</u> Ta <u>≤</u> 60°C -20 <u>≤</u> Ta<0°C	mV	180	180	200	300	400
12	Maximum Line Regulation	(*5)(*11)	mV	48	60	96	144	192
13	Maximum Load Regulation	(*6)(*11)	mV	96	120	144	216	288
14	Temperature Coefficient			Less than 0.02% / °C				
15	Over Current Protection (*7)			88.2 - 70.4 - 44.1 - 29.4 - 22.1 -				
16	Over Voltage Protection	(*8)	A V	14.4 - 17.4	18.0 - 21.8	30.0 - 36.0	43.2 - 52.2	55.2 - 60.0
17	Hold-up Time (Typ)	(*1)	-			20ms		
18	Leakage Current (*9)			Less than 0.3mA				
19	Remote Sensing (*14)			Possible				
20	Monitoring Signal	-						
21					-			
22	Parallel Operation							
23	Series Operation (*14)		-	Possible				
24	Operating Temperature (*10)(*11)		-	-20 - +60°C (-20 - +50°C:100%, +60°C:60%)				
25	Operating Humidity		-	20 - 90%RH (No Condensing)				
26	Storage Temperature		-	-30 - +75°C				
27	Storage Humidity		-	10 - 90%RH (No Condensing)				
28	Cooling		-	Forced Air Cooling				
29	9 Withstand Voltage		-					
2.0				Output-FG: 1.5kVAC (20mA) 1xMOPP for 1min				
30	Isolation Resistance			More than 100MΩ at 25°C and 70%RH Output to Chassis: 500VDC				
31	31 Vibration			At no operating, 10 - 55Hz (Sweep for 1min)				
22				19.6m/s <sup>2</sup> Constant, X,Y,Z 1hour each.				
32	Shock			Less than 196m/s <sup>2</sup>				
33	Safety	-		Approved by ES60601-1 3rd Edition, EN60601-1 3rd Edition, CSA-C22.2 No.60601-1 3rd Edition.				
34	Line DIP	Designed to meet SEMI-F47 (200VAC Line only)						
35	Conducted Emission	Designed to meet SEMI-F47 (200 VAC Line only)  Designed to meet EN55011/EN55032-A, FCC-A, VCCI-A						
36	Conducted Emission (*12) - Designed to meet EN55011/EN55032-A, FCC-A, VCCI-A  Radiated Emission (*12) - Designed to meet EN55011/EN55032-A, FCC-A, VCCI-A							
37	Immunity (*12)			Designed to meet EN55011/EN55032-A, FCC-A, VCCI-A  Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11				
38	Weight (Typ)			2000				
_	39 Size (W x H x D)			127 x 63 x 198 ( Refer to Outline Drawing )				
3)	SIZE (WATTAD)		mm		12 / A UJ A 17	o ( Neier to Outi	inc Diawing )	


## SPECIFICATIONS (2/2)

\*Read instruction manual carefully, before using the power supply unit.

## =NOTES=

- \*1. At 100VAC/200VAC, Ta=25°C, nominal output voltage and maximum output power.
- \*2. For cases where conformance to various safety specs (UL, CSA, EN) are required, to be described as 100 240VAC(50-60Hz).
- \*3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- \*4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.
- \*5. 85 265VAC, constant load.
- \*6. No load-Full load, constant input voltage.
- \*7. Constant current limit with automatic recovery. Over current condition for more than 5 seconds will cause the output to shut down. Avoid to operate at over load or short circuit condition.
- \*8. OVP circuit will shut down output, manual reset (Re power on).
- \*9. Measured by the each measuring method of UL, CSA, EN and Den-an(at 60Hz), Ta=25°C.
- \*10. Output Derating
  - Refer to LOAD vs. AMBIENT TEMPERATURE(A273-01-02).
  - Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
- \*11. Output derating needed when input voltage less than 90VAC. Refer to LOAD vs. INPUT VOLTAGE(A273-01-02\_).
- \*12. The power supply is considered a component which will be installed into a final equipment. The final equipment should be re-evaluated that it meets EMC directives.
- \*13. Ta=25°C, nominal output voltage and maximum output power.
- \*14. Refer to instruction manual(A273-04-01).

Fig.A

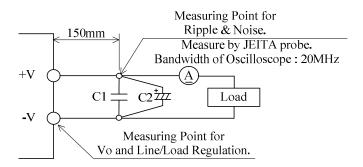

C1 : Film Cap.  $0.1\mu F$ C2 : Elect. Cap.  $47\mu F$